



diomede

diomede


LET THERE BE LIGHT

external use program
2026

Authentic Italian Product



Diomedede intends to bring light to people.
A workshop peopled with digital renaissance craftsmen;
fond of such a dynamic light, capable to reduce in a unique and essential
movement engineering's necessities, design bursts, and architectural stunts.

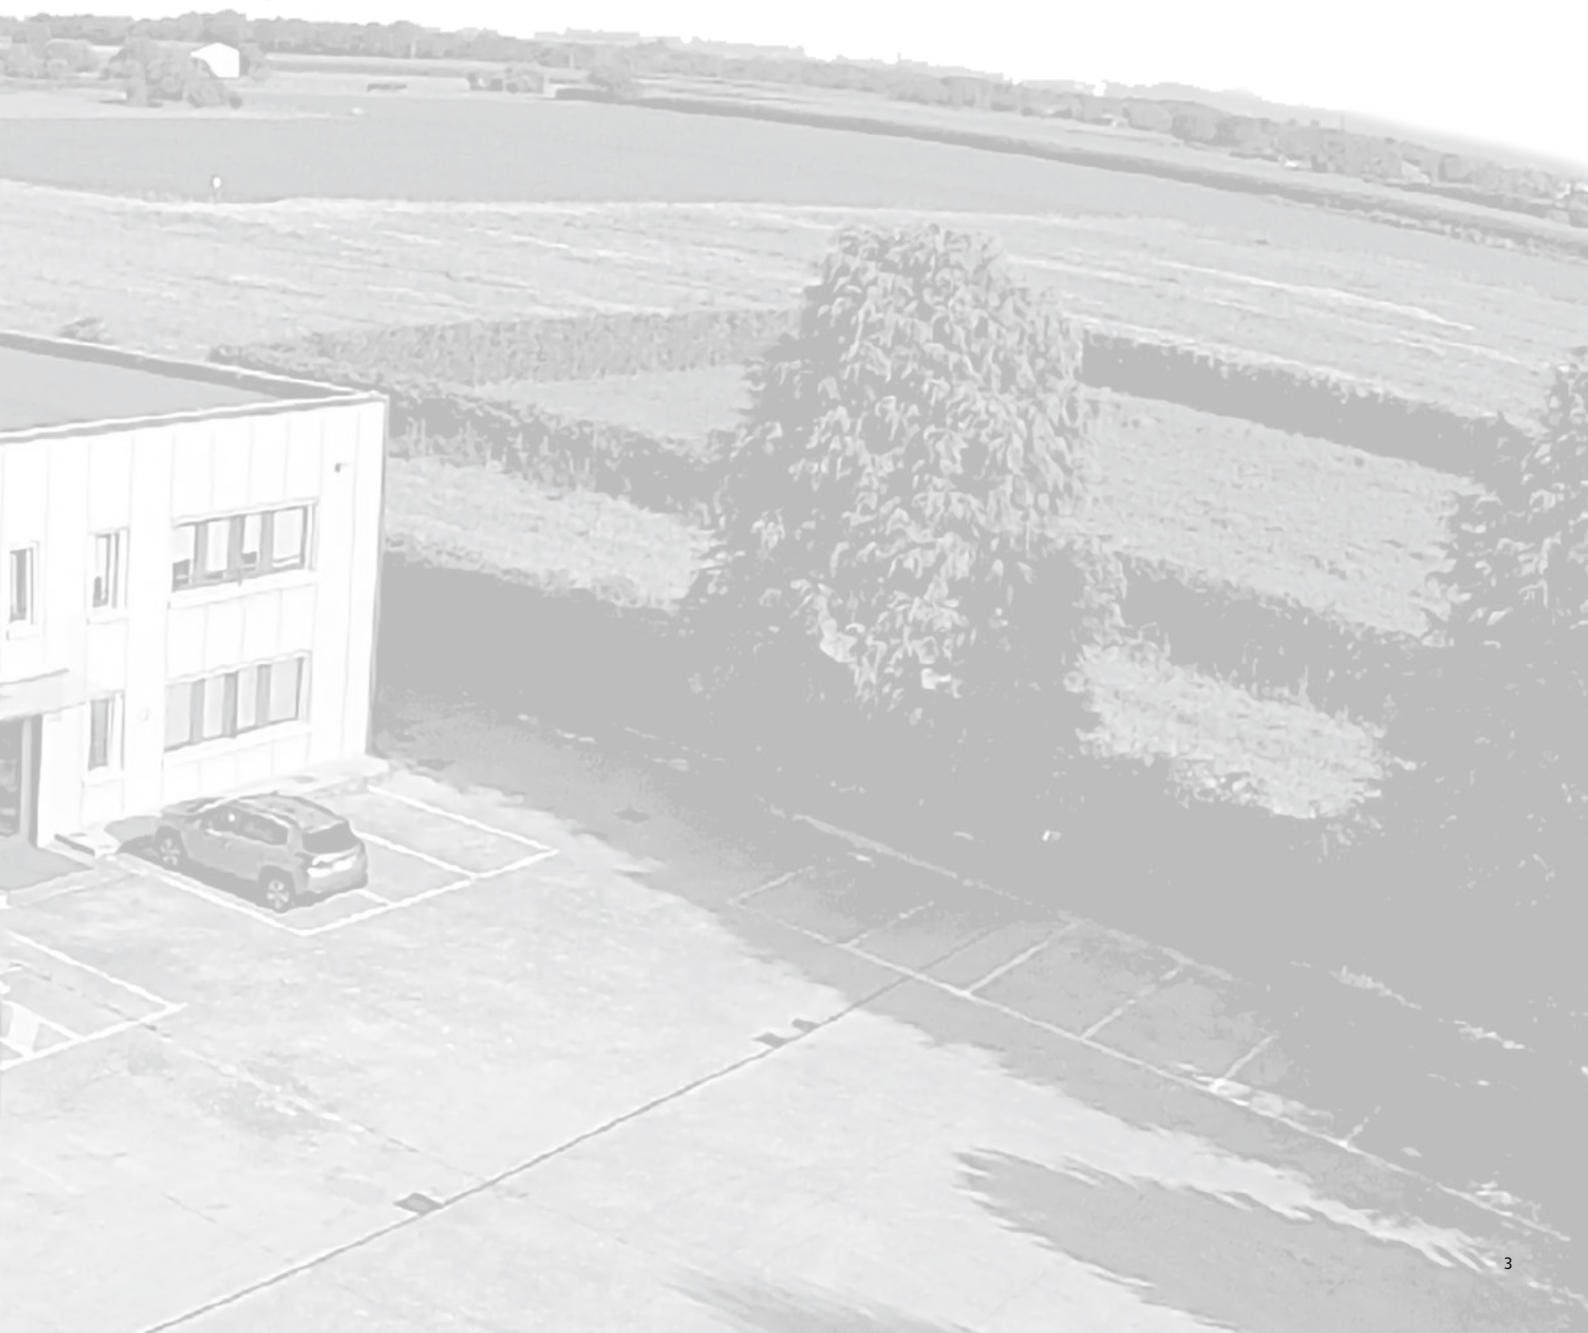

Q i O R E P E



SURFACE TREATMENT AND PAINTING PROCESS

Aluminium fixtures are treated by cataphoresis process followed by a layer of polyester powder coating; this to prevent Uv rays and external agents damages.

LINE LOADING

- > **PHOSPHODEGREASING WITH IRON SALTS:**
degreasing and phosphating Rinsing, cleaning and layer of soft iron salts deposit.
- > **FINAL RINSING:**
Pre Cataphoresis rinse with demi water to remove residues.
- > **CATHODIC ELECTRODEPOSITION:**
immersion in cataphoresis tank and rinsing
- > **HEATING:**
Surface polymerization of the cataphoresis layer heating at 170/180°C.

LINE LOADING

- > **POLYESTER POWDER COATING:**
Aluminium parts are 60/80 micron coated electrostatic guns tribo type, by hand or automatic reciprocator.
- > **OVEN HEATING:**
21' at 190°C




white



sand




graphite

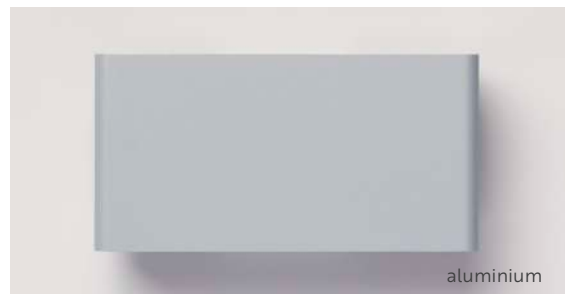

aluminium



corten

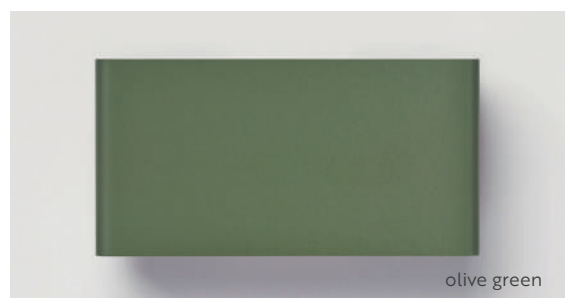

olive green



BELLA
p. 9



GLER SUN
p. 67



NOCTIS
p. 109



LUCIGNOLO
p. 147



LEA
p. 19



ULISSE
p. 83



ITACA
p. 119



TALON
p. 159



STER
p. 35



MIMICRY
p. 93



METOO
p. 131



DIVAR
p. 169



NOTHING
p. 57



DOTLIGHT
p. 99



ELOISE
p. 139



ROOT
p. 181



ARIA
p. 191



DX
p. 221



SOFIA
p. 305



ZEUS
p. 339



ZERO
p. 195



MUSE
p. 243



MATITA
p. 315



LIGHTSABER
p. 347



TASCA
p. 207



TREE SPOT
p. 287




NAIL
p. 323



MIRON
p. 369



MODULO A
p. 213



LILA
p. 297



MATITA SQUARE
p. 331



Bella

TOUCH OF ELEGANCE

Elegant and minimalistic, Bella is a floor lamp suitable for both outdoor and indoor environments, unique in its kind. It is equipped with a rechargeable and removable battery housed in the geo-mortar base.

The structure is made of fine aluminum, powder-coated with polyester, while the joint, anodized, allows rotation on both axes. Versions with a cable and IP65 connector or cable and IP20 plug are also available.

The LED color temperatures are 2700K and 3000K, and the LED board is housed in the structure and sealed with opal polyurethane resin to ensure IP protection.

Bella is dimmable from 10% to 100% and can be activated via the soft touch sensor located in the front slot of the base.

Elegante e minimale Bella è una piantana adatta ad ambienti esterni o interni, unica nel suo genere, perché equipaggiata con batteria ricaricabile ed estraibile alloggiata nella base in geo malta.

La struttura di finissimo alluminio è verniciata a polvere di poliestere mentre lo snodo, anodizzato, ne rende possibile la rotazione su entrambi gli assi.

Sono disponibili anche versioni con cavo e connettore IP65 o cavo e spina IP20.

Le colorazioni led sono (2700K e 3000K), la scheda led è alloggiata nella struttura e sigillata con resina poliuretanica opale a garanzia della tenuta IP.

Bella è dimmerabile 10%-100% e attivabile tramite il soft touch sensor alloggiato nella fessura frontale della base.


DESIGN PLUS

powered by: **light+building**

2022






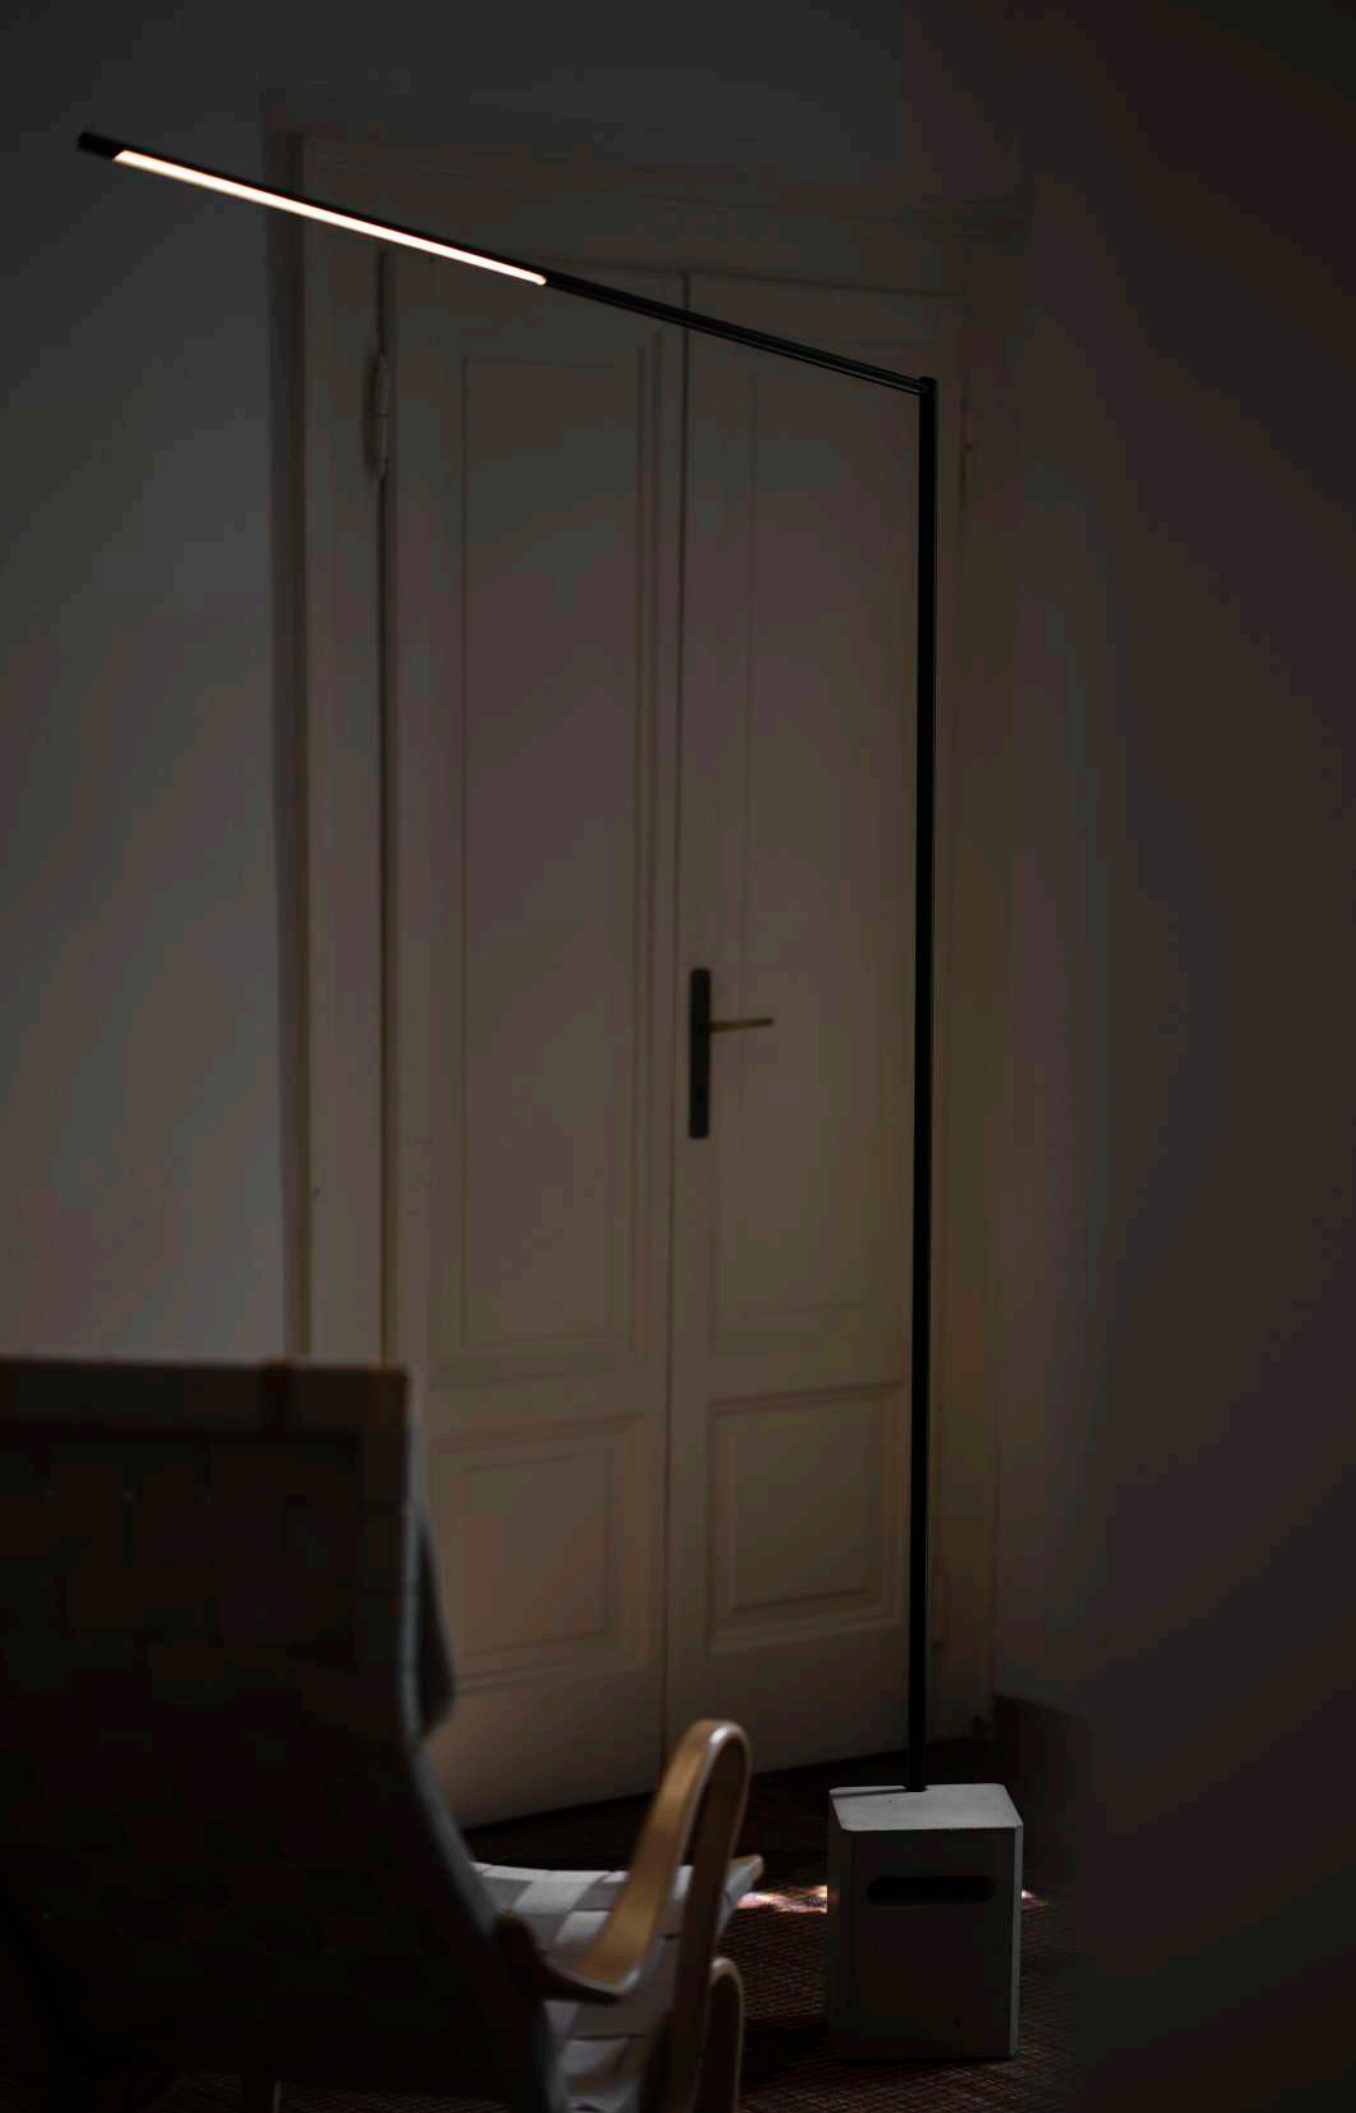

Bella PRO

L 1700

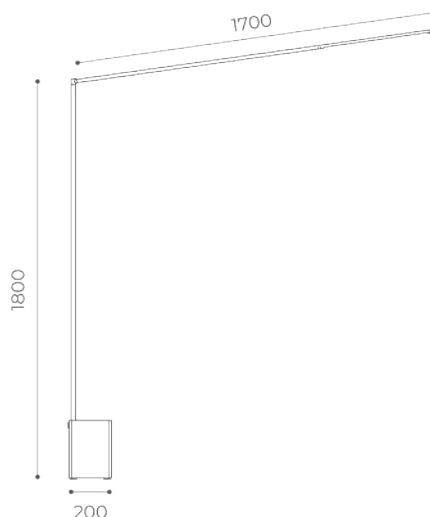


Available finishes:



Light Source mid power led
Supply cell lithium battery;230V
Dimmer yes
CRI ≥80
Electrical Class III, II
IP rating 40
Application floor portable
Diffuser lens

Power 11,5W
Led Colour temp. 2700K - 3000K



Battery Version | IP40


		lm	code
2700K	III	1040	901938057
3000K		1080	901918057
11,5Wled			

Cable Version | IP40

		lm	code
2700K	II	1040	901931077
3000K		1080	901911077
11,5Wled			
14We			

Cable&Plug Version | IP20

		lm	code
2700K	II	1040	901931067
3000K		1080	901911067
11,5Wled			
14We			

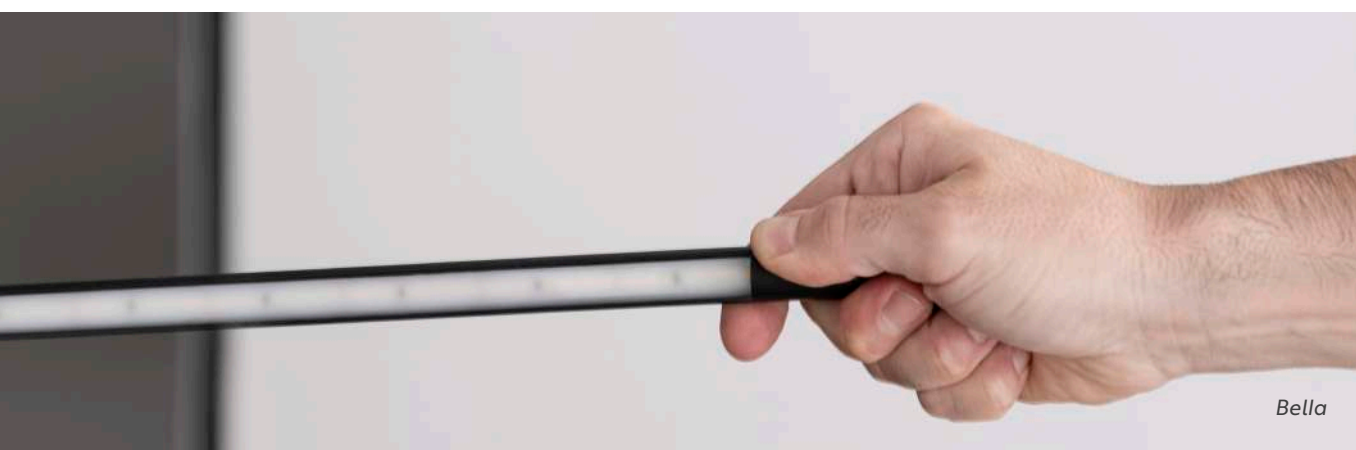


Bella



Bella PRO

Bella

L 1700

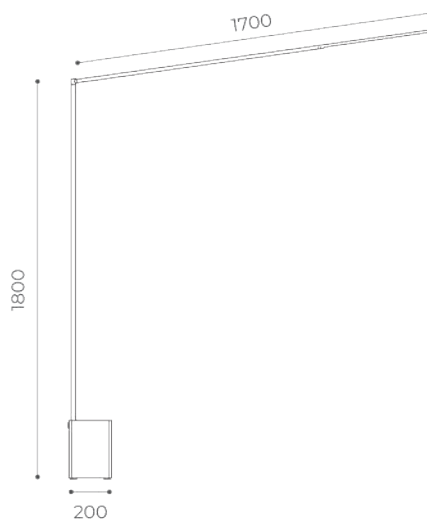

Available finishes:



black

Light Source	mid power led
Supply	cell lithium battery; 230V
Dimmer	yes
CRI	≥80
Electrical Class	III, II
IP rating	65 - 20
Application	floor portable
Diffuser	polyurethane opal resin

Power	11,5W
Led Colour temp.	2700/2800K - 3000/3100K



Battery Version | IP65

		lm	code
2700/2800K	III	840	901938007
3000/3100K		867	901918007
11,5Wled			

Cable Version | IP65

		lm	code
2700/2800K	II	840	901931047
3000/3100K		867	901911047
11,5Wled			
14We			

Cable&Plug Version | IP20

		lm	code
2700/2800K	II	840	901931027
3000/3100K		867	901911027
11,5Wled			
14We			

courtesy white light off



courtesy white light on




cable/cable europlug version



battery version



ACCESSORIES



Battery Pack
code **9070**



ACCESSORIES:
code **9070**



Lea

ELEGANCE AND TIMELESS FORMS

The evocation of the past—its elegance and timeless forms—returns in a contemporary interpretation with LEA.

A complete family designed for all main applications: the pole version available in 2 m height; bollards in 500 mm and 800 mm; the most traditional wall-mounted and the suspended versions with 500 mm and 1000 mm stems.

The structure is made of machined and extruded aluminium, treated with cathoresis and coated with outdoor-resistant polyester powder.

Equipped with G9 or E27 bulb, 3000K.

The diffuser is a multi-layer, blown glass sphere in opal white, acid-etched. Rated IP65.

L'evocazione del passato, l'eleganza e le forme di un tempo tornano in chiave moderna con LEA.

Una famiglia completa che si sviluppa in tutte le principali applicazioni: la versione palo disponibile in altezza 2mt, i bollard da 500mm e 800mm; la più tradizionale applique e la sospensione con steli da 500mm e 1000mm.

La struttura è in alluminio lavorato ed estruso, trattato con cataforesi e verniciato con polvere di poliestere resistente agli ambienti esterni.

Equipaggiato con portalampada e lampadina inclusa 3000K, G9 o E27.

Il diffusore è una sfera in vetro multistrato soffiato di colore bianco latte, acidato. Garantito IP65.

Design by Brian Sironi












Lea 130

applique

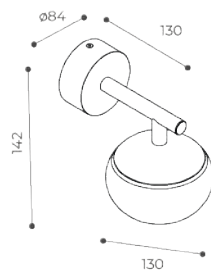

Available finishes:

- white
- sand
- graphite
- aluminium
- corten
- olive green

Light Source
Supply
CRI
IP rating
Electrical Class
Application
Diffuser

G9 bulb
 220-240V
 ≥80
 IP65
 II
 wall
 white opal glass hemisphere


Power 4,3W max
Led Colour temp. 3000K



				white	sand	graphite	aluminium	corten	green
G9	220-240V	3000K	diffused	903111002	903111003	903111004	903111005	903111008	9031110016
4,3Wmax									

Lea 130 bollard

h500 / h800

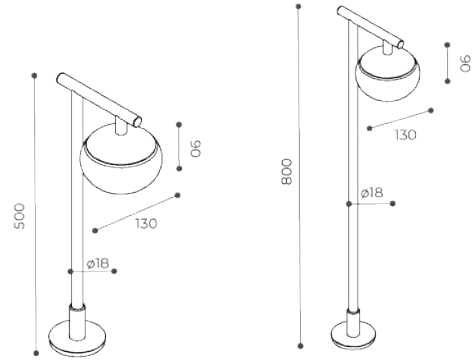

Available finishes:



Light Source
Supply
CRI
IP rating
Electrical Class
Application
Diffuser

G9 bulb
 220-240V
 ≥80
 IP65
 II
 floor, ground
 white opal glass hemisphere

Power 4,3W max
Led Colour temp. 3000K



h500

				white	sand	graphite	aluminium	corten	green
G9	220-240V	3000K	diffused	903111012	903111013	903111014	903111015	903111018	903111016
4,3Wmax									


h800

				white	sand	graphite	aluminium	corten	green
G9	220-240V	3000K	diffused	903111022	903111023	903111024	903111025	903111028	9031110216
4,3Wmax									



Lea 130 suspension

h500 / h1000

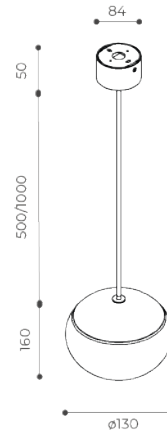

Available finishes:



Light Source
Supply
CRI
IP rating
Electrical Class
Application
Diffuser

G9 bulb
 220-240V
 ≥80
 IP65
 II
 ceiling
 white opal glass hemisphere

Power 4,3W max
Led Colour temp. 3000K



h500

				white	sand	graphite	aluminium	corten	green
G9	220-240V	3000K	diffused	903111032	903111033	903111034	903111035	903111038	9031110316
4,3Wmax									


h1000

				white	sand	graphite	aluminium	corten	green
G9	220-240V	3000K	diffused	903111042	903111043	903111044	903111045	903111048	9031110416
4,3Wmax									



Lea 200

applique

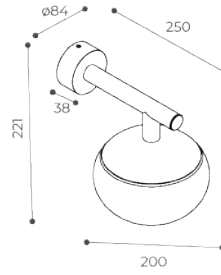

Available finishes:

- white
- sand
- graphite
- aluminium
- corten
- olive green

Light Source
Supply
CRI
IP rating
Electrical Class
Application
Diffuser

E27 bulb
 220-240V
 ≥80
 IP65
 II
 wall
 white opal glass hemisphere


Power 15W max
Led Colour temp. 3000K



				white	sand	graphite	aluminium	corten	green
E27	220-240V	3000K	diffused	903111052	903111053	903111054	903111055	903111058	9031110516
15Wmax									

Lea 200 bollard

h200

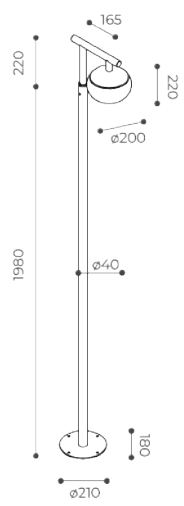

Available finishes:

- white
- sand
- graphite
- aluminium
- corten
- olive green

Light Source
Supply
CRI
IP rating
Electrical Class
Application
Diffuser

E27 bulb
 220-240V
 ≥80
 IP65
 II
 floor, ground
 white opal glass hemisphere


Power 15W max
Led Colour temp. 3000K



					white	sand	graphite	aluminium	corten	green
E27	220-240V	3000K	diffused	base	903111062	903111063	903111064	903111065	903111068	9031110616
15Wmax				in-ground	903111072	903111073	903111074	903111075	903111078	9031110716

Lea 200 suspension

h500 / h1000

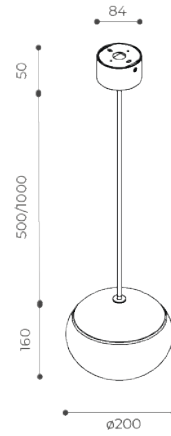

Available finishes:



Light Source
Supply
CRI
IP rating
Electrical Class
Application
Diffuser

E27 bulb
 220-240V
 ≥80
 IP65
 II
 ceiling
 white opal glass hemisphere

Power 15W max
Led Colour temp. 3000K




h500

				white	sand	graphite	aluminium	corten	green
E27	220-240V	3000K	diffused	903111082	903111083	903111084	903111085	903111088	9031110816
15Wmax									

h800


				white	sand	graphite	aluminium	corten	green
E27	220-240V	3000K	diffused	903111092	903111093	903111094	903111095	903111098	9031110916
15Wmax									

ACCESSORIES



Lea130:
Anchor bolts
Ø205x200mm

code **9062**



Lea200:
Anchor bolts
Ø205x200mm

code **9093**

ACCESSORIES:

code **9062 / 9093**



Ster

GEOMETRY HIGHLIGHTS SIMPLICITY AND EFFICIENCY

A cone of light designed to illuminate outdoor spaces, with a strong and contemporary design—its geometry highlights simplicity and efficiency.

Ster is a projector available in multiple configurations, suitable for all main applications.

SPOT GU10 Model: Available as a wall-mounted projector or as a bollard with single or double emission (H 500 mm, 800 mm), equipped with a GU10 lampholder (lamp not included), or in the SPOT10° version with SORAA® lamp (beam and light-colour accessories to be ordered separately). Die-cast aluminium body, with cathodoluminescence treatment and polyester powder coating, the base is made of turned aluminium specifically treated for outdoor resistance.

Adjustability: $\pm 90^\circ$ tilt / $\pm 355^\circ$ rotation.

The transparent, tempered glass with black silk-screened is attached to the removable frame for access during maintenance.

Direct power supply 220–240V.

DIFFUSED Model: Available as a wall fixture, single or double-emission bollard (500 mm and 800 mm), or suspension with rod.

Light source: power LED, 2700K or 3000K, CRI ≥ 90 .

The luminaire body and base are made of turned aluminium with cathodoluminescence treatment and polyester powder coating.

The transparent, tempered glass with black screen-printing is sealed to the body to ensure IP66 protection.

Power supply: 220–240V (phase-cut dimmable for wall version) or 24V with remote driver to be ordered separately.

Un cono di luce ad illuminare gli spazi esterni, design deciso e attuale, una geometria che esalta semplicità ed efficienza.

Ster è un proiettore che si declina in molteplici soluzioni e per tutte le applicazioni principali.

Modello SPOT GU10: in versione proiettore a parete o bollard a singola o doppia emissione (h500mm, 800mm) con portalampada senza lampadina o in versione SPOT10° con lampadina SORAA® (accessori relativi a fascio e colore di luce, da ordinare separatamente). Corpo in pressofusione di alluminio con cataforesi e verniciatura a polvere di poliestere, base in alluminio tornito e trattato appositamente per la resistenza all'esterno. Puntabilità $\pm 90^\circ$ - orientabilità $\pm 355^\circ$. Il vetro trasparente e temprato con serigrafia nera è incollato alla ghiera removibile per la manutenzione del vano.

Alimentazione diretta 220-240V.

Modello DIFFUSED: versione parete, bollard a singola o doppia emissione da 500mm e 800mm oppure sospensione con tige. Sorgente luminosa power Led nelle colorazioni 2700K e 3000K CRI ≥ 90 . Corpo lampada e basetta in alluminio tornito trattato con cataforesi e verniciatura in polvere di poliestere. Il vetro trasparente e temprato con serigrafia nera è incollato al corpo a garanzia della tenuta IP66.


Alimentazione 220-240V (dimmabile fase-cut per la versione a parete) o 24V alimentazione remota da predisporre separatamente.

Design by Brian Sironi



Ster Diffused

wall

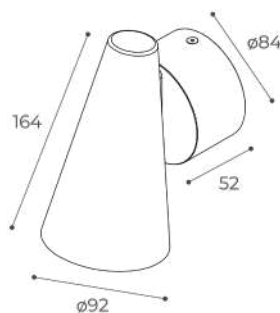

Available finishes:



Light Source
Supply
CRI
Dimmer
IP rating
Electrical Class
Application
Diffuser

mid power led
 220-240V
 ≥80
 PWM 24V;
 IP66
 II, III
 wall
 sandblasted glass


Power 24V 6Wled
 220-240V 6Wled - 8We
Led Colour temp. 2700K / 3000K



					white	sand	graphite	aluminium	corten	green
2700K 6Wled	24V	III	diffused	lm	902832062	902832063	902832064	902832065	902832068	9028320616
3000K 6Wled	24V	III	diffused	lm	902812062	902812063	902812064	902812065	902812068	9028120616
2700K 6Wled 8We	220-240V	II	diffused	lm	902831062	902831063	902831064	902831065	902831068	9028310616
3000K 6Wled 8We	220-240V	II	diffused	lm	902811062	902811063	902811064	902811065	902811068	9028110616

Ster Diffused

single bollard h500

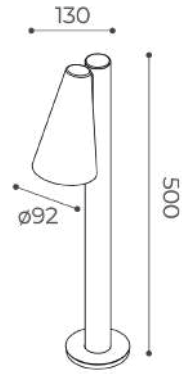

Available finishes:



Light Source
Supply
CRI
Dimmer
IP rating
Electrical Class
Application
Diffuser

mid power led
 220-240V
 ≥80
 only 24V (PWM)
 IP66
 II, III
 floor
 sandblasted glass


Power 24V 6Wled
 220-240V 6Wled - 8We
Led Colour temp. 2700K / 3000K



					white	sand	graphite	aluminium	corten	green
2700K 6Wled 8We	24V	III	diffused	lm	902832072	902832073	902832074	902832075	902832078	9028320716
3000K 6Wled 8We	24V	III	diffused	lm	902812072	902812073	902812074	902812075	902812078	9028120716
2700K 6Wled 8We	220-240V	II	diffused	lm	902831072	902831073	902831074	902831075	902831078	9028310716
3000K 6Wled 8We	220-240V	II	diffused	lm	902811072	902811073	902811074	902811075	902811078	9028110716

Ster Diffused

single bollard h800

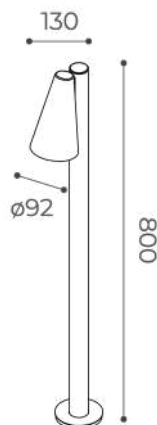

Available finishes:



Light Source
Supply
CRI
Dimmer
IP rating
Electrical Class
Application
Diffuser

mid power led
 220-240V
 ≥80
 only 24V (PWM)
 IP66
 II, III
 floor
 sandblasted glass


Power 24V 6Wled
 220-240V 6Wled - 8We
Led Colour temp. 2700K / 3000K



					white	sand	graphite	aluminium	corten	green
2700K 6Wled 8We	24V	III	diffused	lm	902832082	902832083	902832084	902832085	902832088	9028320816
3000K 6Wled 8We	24V	III	diffused	lm	902812082	902812083	902812084	902812085	902812088	9028120816
2700K 6Wled 8We	220-240V	II	diffused	lm	902831082	902831083	902831084	902831085	902831088	9028310816
3000K 6Wled 8We	220-240V	II	diffused	lm	902811082	902811083	902811084	902811085	902811088	9028110816

Ster Diffused

double bollard h800

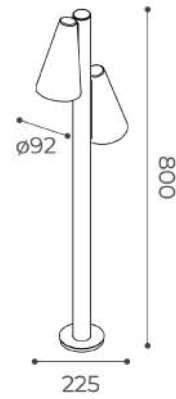

Available finishes:



Light Source
Supply
CRI
Dimmer
IP rating
Electrical Class
Application
Diffuser

mid power led
 220-240V
 ≥80
 only 24V (PWM)
 IP66
 II, III
 floor
 sandblasted glass

Power 24V 2x6Wled
 220-240V 2x6Wled - 14We
Led Colour temp. 2700K / 3000K




					white	sand	graphite	aluminium	corten	green
2700K 2X6Wled 12We	24V	III	diffused	lm	902832092	902832093	902832094	902832095	902832098	9028320916
3000K 2X6Wled 12We	24V	III	diffused	lm	902812092	902812093	902812094	902812095	902812098	9028120916
2700K 2X6Wled 14We	220-240V	II	diffused	lm	902831092	902831093	902831094	902831095	902831098	9028310916
3000K 2X6Wled 14We	220-240V	II	diffused	lm	902811092	902811093	902811094	902811095	902811098	9028110916




Snap System Accessories


SORAA®

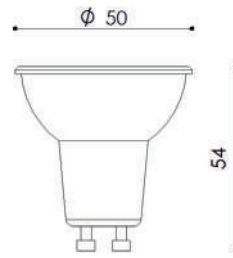

The Snap System's self-centering magnetic interconnect system makes using accessories completely user friendly. Simply attached the Snap System™ accessory directly to any narrow spot Soraa lamp, the magnetic force from both the accessory and lamp will securely attached to one another and center itself.

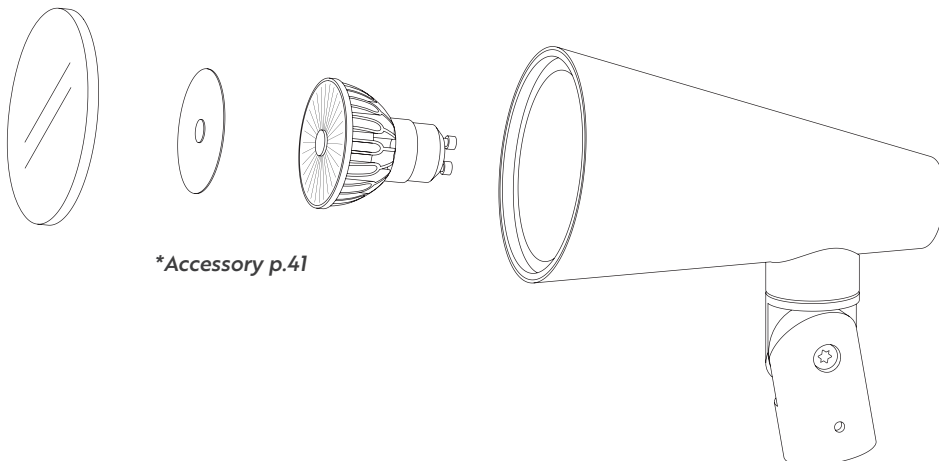

ACCESSORIES

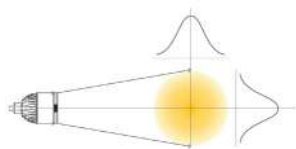**Beam Spreader Snap**


Increase the beam angle from standard 10° to:

- 36° code **9084**
- 60° code **9085**

Lumen transmissivity: 90%

Diameter: 50mm. **Thickness:** 2mm

Magnetic attach force: 0.6N

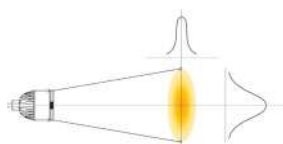**Linear Snap**


Ensure elliptical beam angle for wall washing effect or asymmetric projections:

- 10°x60° code **9086**

Lumen transmissivity: 90%

Diameter: 50mm. **Thickness:** 2mm

Magnetic attach force: 0.6N

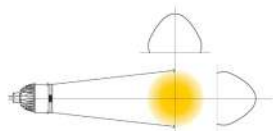**Flat Top Snap**


Provide even illumination enter to edge. It allows to obtain a square light beam.

- 25°x25° code **9087**

Lumen transmissivity: 90%

Diameter: 50mm. **Thickness:** 2mm

Magnetic attach force: 0.6N

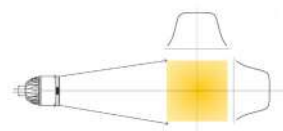**Louver Snap**

Eliminates high angle glare.

- Cutoff angle 40° code **9088**

Diameter: 51,1mm. **Thickness:** 9mm

Magnetic attach force: 0.6N








Ster Spot Base

base

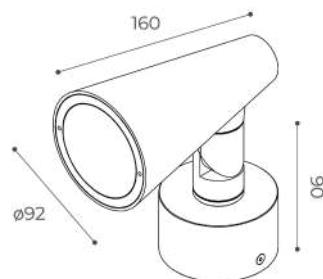

Available finishes:



Light Source
Supply
CRI
IP rating
Dimmer
Electrical Class
Application
Diffuser


GU10 bulb
 220-240V
 if Soraa ≥ 90
 IP66
 phase cut with Soraa lamp
 II
 wall, ground
 transparent glass

Power 7,5W is Soraa
Led Colour temp. 2700K / 3000K



				10° lm	white	sand	graphite	aluminium	corten	green
GU10	220-240V	2700K	540	902831002	902831003	902831004	902831005	902831008	902831016	
7,5Wled		3000K	560	902811002	902811003	902811004	902811005	902811008	902811016	
7,5We										
				white	sand	graphite	aluminium	corten	green	
GU10	220-240V			902801012	902801013	902801014	902801015	902801018	902801016	
Senza lampadina/Without bulb										

SORAA

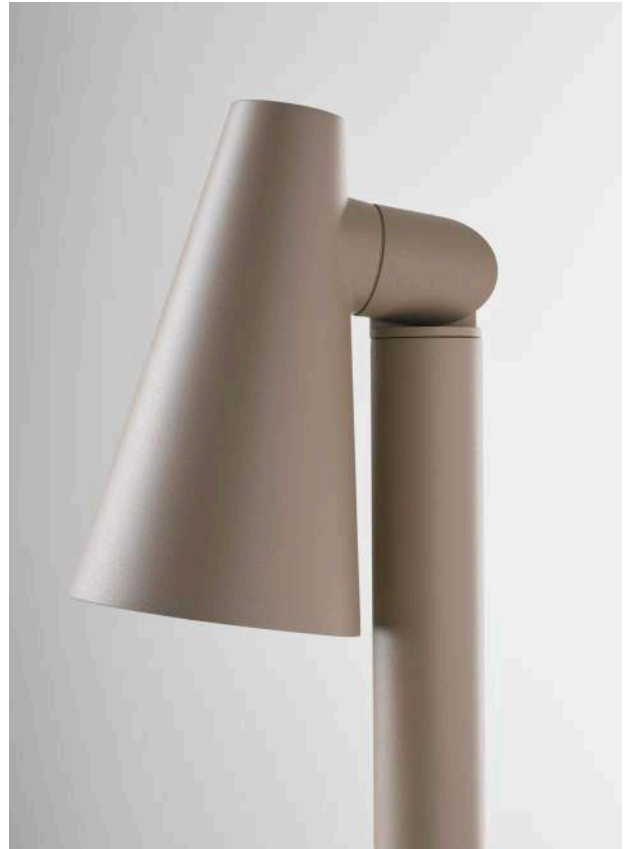

Ster Spot Bollard

h500



Available finishes:



Light Source
Supply
CRI
IP rating
Dimmer
Electrical Class
Application
Diffuser

GU10 bulb
 220-240V
 if Soraa ≥90
 IP66
 phase cut with Soraa lamp
 II
 floor
 transparent glass

Power 7,5W is Soraa
Led Colour temp. 2700K / 3000K




				10° lm	white	sand	graphite	aluminium	corten	green
GU10	220-240V	2700K	540	902831022	902831023	902831024	902831025	902831028	902831026	9028310216
7,5Wled		3000K	560	902811022	902811023	902811024	902811025	902811028	902811026	9028110216
7,5We										
				white	sand	graphite	aluminium	corten	green	
GU10	220-240V			902801032	902801033	902801034	902801035	902801038	9028010316	
Senza lampadina/Without bulb										

SORAA



Ster Spot Bollard

h800

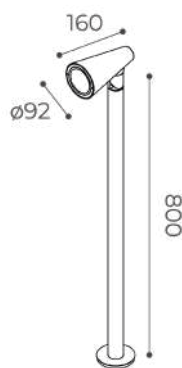

Available finishes:



Light Source
Supply
CRI
IP rating
Dimmer
Electrical Class
Application
Diffuser

GU10 bulb
 220-240V
 if Soraa ≥90
 IP66
 phase cut with Soraa lamp
 II
 wall
 transparent glass

Power 7,5W is Soraa
Led Colour temp. 2700K / 3000K




				10° lm	white	sand	graphite	aluminium	corten	green
GU10	220-240V	2700K	540	902831042	902831043	902831044	902831045	902831048	902831046	
7,5Wled		3000K	560	902811042	902811043	902811044	902811045	902811048	902811046	
7,5We										
				white	sand	graphite	aluminium	corten	green	
GU10	220-240V			902801052	902801053	902801054	902801055	902801058	9028010516	
Senza lampadina/Without bulb										

SORAA

Ster Stem Suspension

700mm

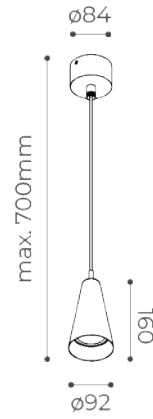

Available finishes:



Light Source
Supply
CRI
Dimmer
IP rating
Electrical Class
Application
Diffuser

mid power led
 220-240V
 ≥80
 only 24V (PWM)
 IP66
 II, III
 ceiling
 sandblasted glass


Power 24V 6Wled
 220-240V 6Wled - 8We
Led Colour temp. 2700K / 3000K



					white	sand	graphite	aluminium	corten	green
2700K 6Wled 6We	24V	III	diffused	lm	902832112	902832113	902832114	902832115	902832118	9028321116
3000K 6Wled 6We	24V	III	diffused	lm	902812112	902812113	902812114	902812115	902812118	9028121116
2700K 6Wled 8We	220-240V	II	diffused	lm	902831112	902831113	902831114	902831115	902831118	9028311116
3000K 6Wled 8We	220-240V	II	diffused	lm	902811112	902811113	902811114	902811115	902811118	9028111116

Ster Stem Suspension

1200mm

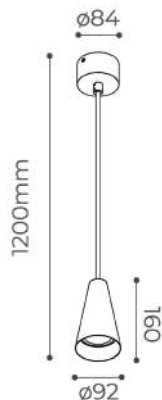

Available finishes:




Light Source
Supply
CRI
Dimmer
IP rating
Electrical Class
Application
Diffuser

mid power led
 220-240V
 ≥80
 only 24V (PWM)
 IP66
 II, III
 ceiling
 sandblasted glass


Power 24V 6Wled
 220-240V 6Wled - 8We
Led Colour temp. 2700K / 3000K



					white	sand	graphite	aluminium	corten	green
2700K 6Wled 8We	24V	III	diffused	lm	902832122	902832123	902832124	902832125	902832128	902832126
3000K 6Wled 8We	24V	III	diffused	lm	902812122	902812123	902812124	902812125	902812128	902812126
2700K 6Wled 8We	220-240V	II	diffused	lm	902831122	902831123	902831124	902831125	902831128	902831126
3000K 6Wled 8We	220-240V	II	diffused	lm	902811122	902811123	902811124	902811125	902811128	902811126

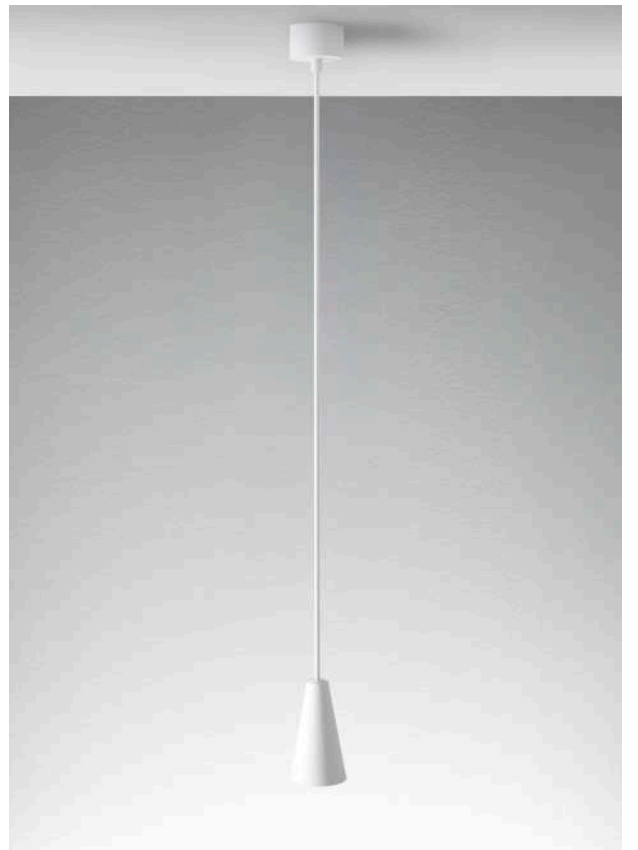


ACCESSORIES




Power supply 16W 110-240V IP65
125x61x31mm

code **9059**




IP 68 Gel Box

code **9080**




Power supply 24V DC 70W IP67
267x79x52mm

code **9049**



Anchor bolts
Ø88x165mm

code **9062**



Power supply 24V DC 150W IP67
267x79x52mm

code **9057**

ACCESSORIES:

code **9059 / 9049 / 9057 / 9080 / 9062**



Nothing

TRACE A LINE IN THE DARK

Trace a line in the dark, enhance the shadows of outdoor spaces, and create the perfect atmosphere.

Elegant, minimal, and perfectly blending into any environment.

Nothing is the element that illuminates without being noticed, designed for those who love light as the true protagonist.

Engineered for in-ground recessed installation, it is available in three heights (500 mm, 1000 mm, 1700 mm) and manufactured from extruded aluminium, anodized and polyester powder-coated for outdoor resistance.

The fixture is equipped with mid-power LEDs, CRI 80, in 2700K or 3000K colour temperatures. IP67 protection is ensured through silicone end caps and a sealed base filled with resin, where the on/off driver is housed.

A 24V version with remote power supply - available as a separate accessory - is also offered.

Tracciare una linea nel buio, esaltare le ombre degli spazi outdoor per creare l'atmosfera perfetta.

Elegante, minimale e perfettamente integrabile in ogni tuo spazio.

Nothing è l'elemento che illumina senza farsi notare, per chi ama la luce protagonista.


Progettato per l'incasso a terra e disponibile in 3 altezze (500mm, 1000mm, 1700mm) è realizzato in alluminio estruso anodizzato e verniciato con polvere di poliestere resistente agli ambienti esterni.

Nothing monta mid- power led CRI80 con colorazione 2700K o 3000K e la protezione IP67 è garantita dalla chiusura tramite tappi di silicone all'estremità e resina nella base stagna dove è alloggiato l'alimentatore on/off, in alternativa è disponibile la versione 24V con l'alimentazione remota da ordinare separatamente.








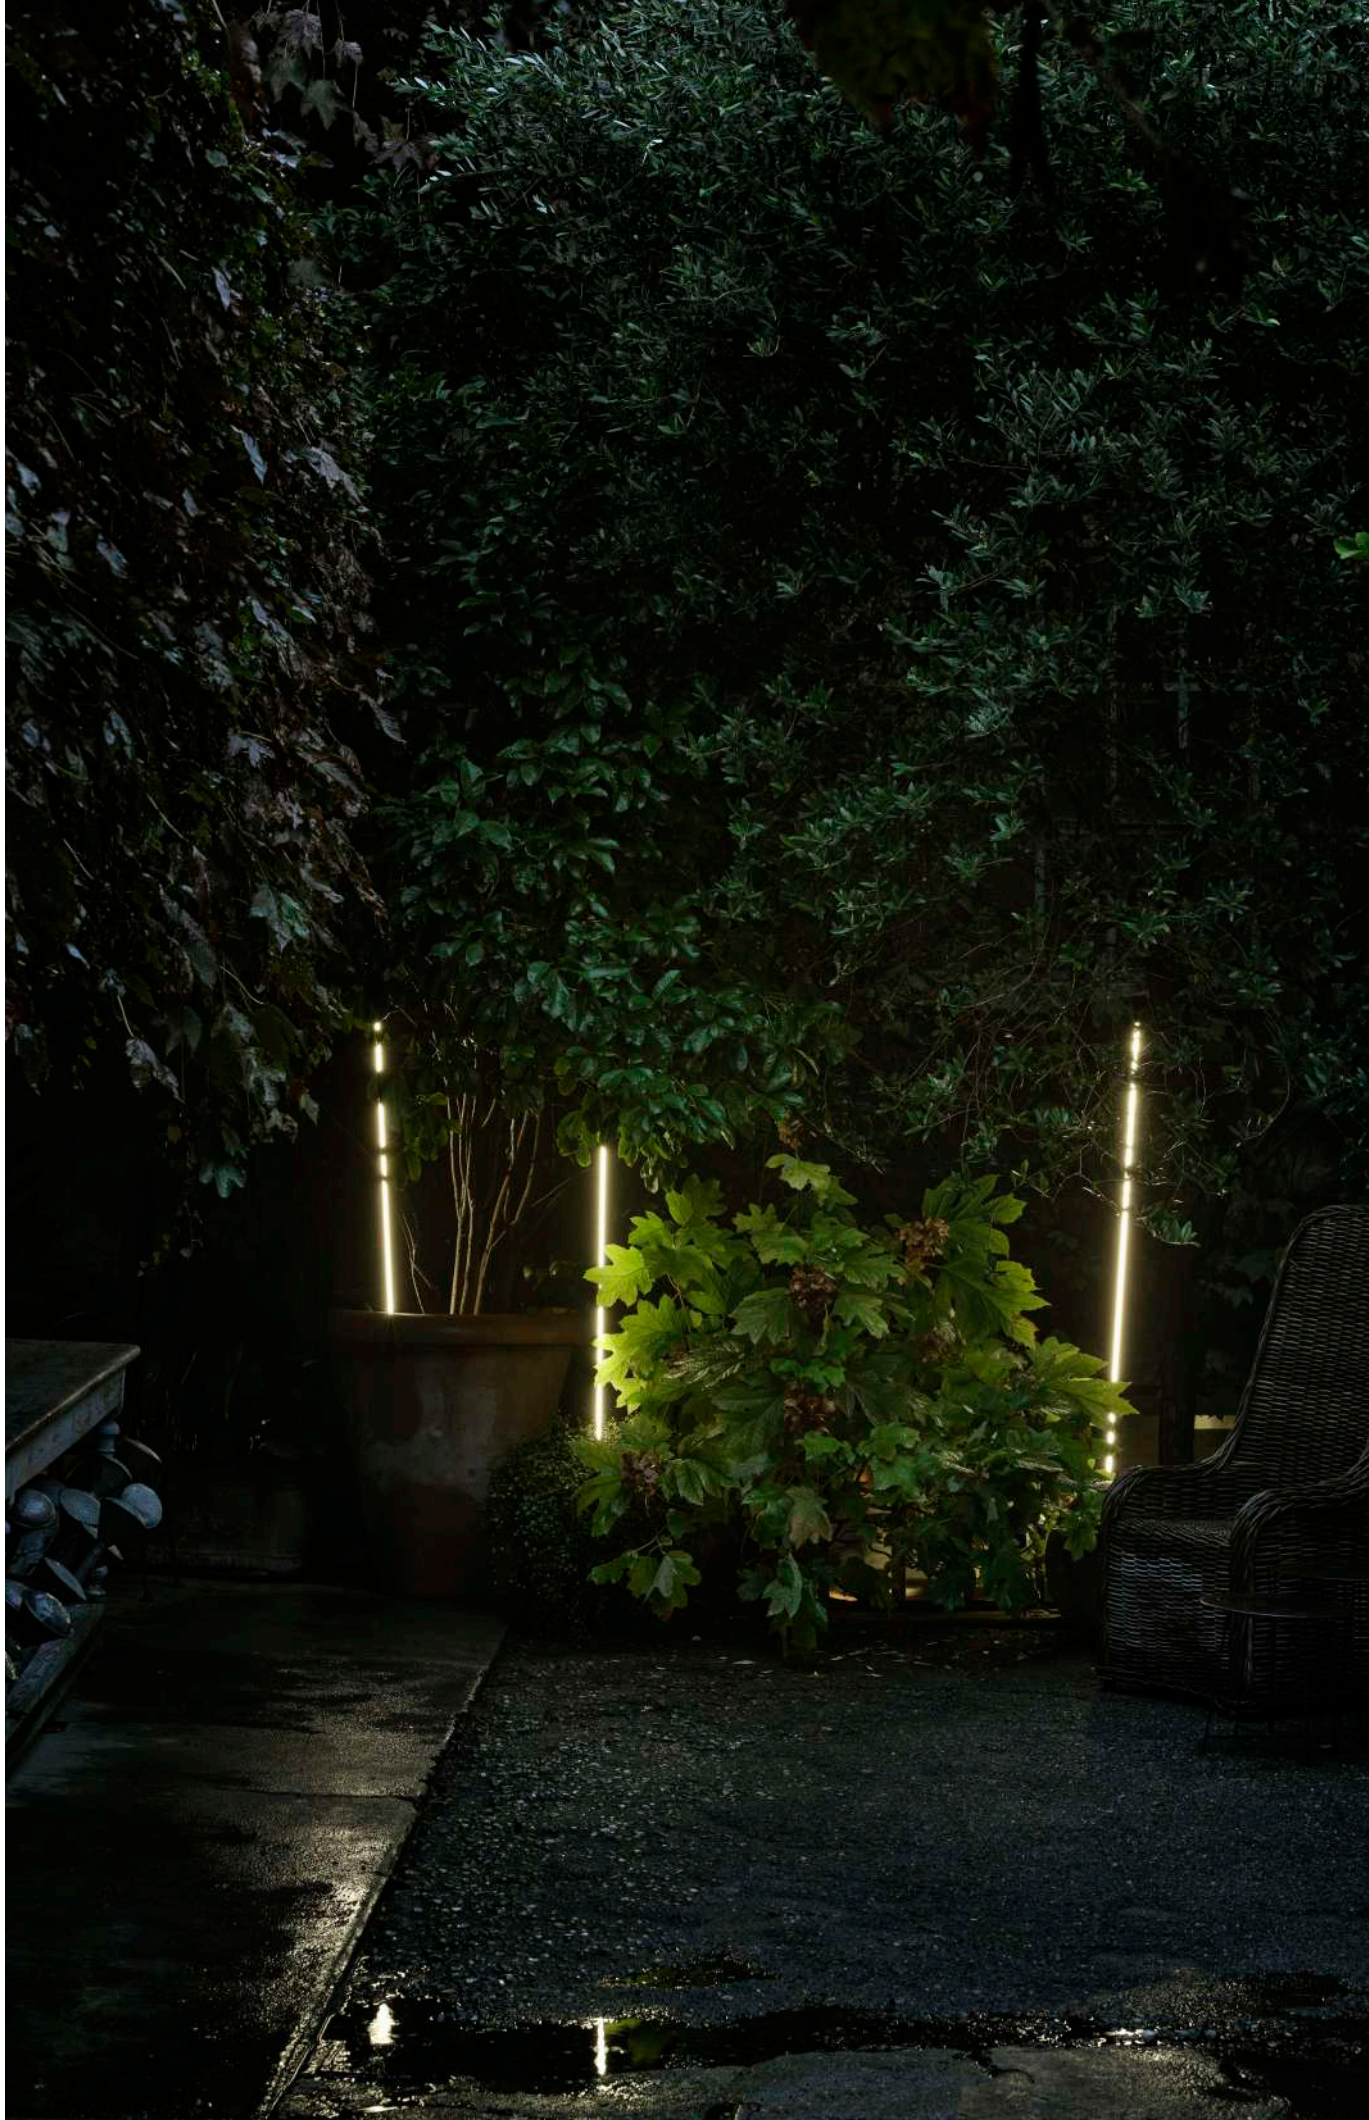


Nothing

h500

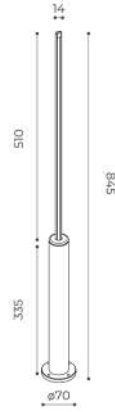

Available finishes:



Light Source

Supply

Dimmer

CRI

IP rating

Electrical Class

Application

Diffuser

mid power led

24V / 220-240V

only 24V (PWM)

≥80

IP66

II, III

ground, soil

opal resin

Power

24V 7Wled

220-240V 7Wled - 10,8We

Led Colour temp.

2700K / 3000K




				corten	green
2700K 7Wled 7We	24V	III	lm	902932008	9029320016
				corten	green
3000K 7Wled 7We	24V	III	lm	902912008	9029120016
				corten	green
2700K 7Wled 10,8We	220-240V	II	lm	902931008	9029310016
				corten	green
3000K 7Wled 10,8We	220-240V	II	lm	902911008	9029110016

The light colour of this fixture may shift by approximately ±150K due to the protective resin covering the leds.

La tonalità di colore è soggetta ad una variazione di ±150K dovuta all'applicazione di resina protettiva sui led.

Nothing

h1000

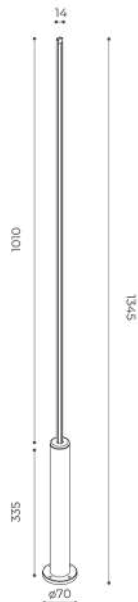

Available finishes:



Light Source mid power led
Supply 24V / 220-240V
Dimmer only 24V (PWM)
CRI ≥80
IP rating IP66
Electrical Class II, III
Application ground, soil
Diffuser opal resin

Power 24V 12Wled
 220-240V 12Wled - 16,2We
Led Colour temp. 2700K / 3000K



				corten	green
2700K 12Wled 12We	24V	III	lm	902932018	9029320116
				corten	green
3000K 12Wled 12We	24V	III	lm	902912018	9029120116
				corten	green
2700K 12Wled 16,2We	220-240V	II	lm	902931018	9029310116
				corten	green
3000K 12Wled 16,2We	220-240V	II	lm	902911018	9029110116

The light colour of this fixture may shift by approximately ±150K due to the protective resin covering the leds.

La tonalità di colore è soggetta ad una variazione di ±150K dovuta all'applicazione di resina protettiva sui led.

Nothing

h1700



Available finishes:



Light Source

Supply

Dimmer

CRI

IP rating

Electrical Class

Application

Diffuser

mid power led

24V / 220-240V

only 24V (PWM)

≥80

IP66

II, III

ground, soil

opal resin

Power

24V 21Wled

220-240V 21Wled - 24,6We

Led Colour temp.

2700K / 3000K




				corten	green
2700K 21Wled 21We	24V	III	lm	902932028	9029320216
				corten	green
3000K 21Wled 21We	24V	III	lm	902912028	9029120216
				corten	green
2700K 21Wled 24,6We	220-240V	II	lm	902931028	9029310216
				corten	green
3000K 21Wled 24,6We	220-240V	II	lm	902911028	9029110216

The light colour of this fixture may shift by approximately ±150K due to the protective resin covering the leds.


La tonalità di colore è soggetta ad una variazione di ±150K dovuta all'applicazione di resina protettiva sui led.

ACCESSORIES




Power supply 16W 110-240V IP65
125x61x31mm

code **9059**



Power supply 24V DC 70W IP67
267x79x52mm

code **9049**




Power supply 24V DC 150W IP67
267x79x52mm

code **9057**



2 way - 3 poles terminal block IP68
Ø23x66mm

code **9004**



3-4 way - 4 poles terminal block IP68
53x26x82mm

code **9005**

ACCESSORIES:

code **9059 / 9049 / 9057 / 9004 / 9005**



Gler Sun

LIGHT THROUGH A GLASS REVEALS NEW BEAUTY

Gler Sun is a modern, minimalistic, and at the same time, nostalgically vintage family of products. It comes in various models designed to meet different installation needs.

The clean design, coupled with a variety of colours and evocative lantern-like lines, makes these products thoroughly contemporary and suitable for even the most stringent installations.

For all its versions, the structure is made of mechanically processed primary aluminium alloy, treated with anodisation, and coated.

A stylish feature is the elegant diffuser made of transparent or internally sandblasted borosilicate glass, enhancing its discretion.

Available for various application, the collection includes the Wall model, specifically designed for wall installation.

The LED source is strategically placed in the upper part of the structure head attachment, effectively minimizing the risk of glare.

The Ceiling version an ideal choice for outdoor area lighting, especially when paired with posts. The bollard, crafted from extruded aluminum, comes in two heights: 500mm and 800mm, with options for a single or double light configuration. The base of the bollard is a distinct element, allowing for the post's rotation during installation to adjust its orientation as needed.

Una famiglia di prodotti moderna e minimale dal sapore vintage, Gler Sun è una proposta estremamente decorativa, che si declina in diversi modelli sulla base delle necessità d'installazione.

Il design pulito accostato alla varietà di colori e alle linee evocative della lanterna, rendono questi prodotti assolutamente contemporanei e adatti anche alle installazioni più rigorose.

Per tutte le sue versioni la struttura è in lega di alluminio primaria lavorata meccanicamente, trattata con anodizzazione e poi verniciata.

Caratteristica di stile è l'elegante diffusore in vetro borosilicato trasparente o internamente sabbiato, che ne esalta la discrezione.

Wall studiato per l'installazione a parete, il posizionamento della sorgente led nella parte alta della struttura all'altezza dell'aggancio del diffusore riduce al massimo il rischio di abbagliamento.

Il modello ceiling per installazione a soffitto è ideale per l'illuminazione delle aree esterne associate ai paletti. Il bollard in alluminio estruso, disponibile in due altezze 500mm e 800mm e in due modelli con singola o doppia luce.

La base del bollard è un elemento distinto questo rende possibile ruotare il paletto stesso durante l'installazione per poterne regolare l'orientamento.






















Gler Sun

wall



Available finishes:



Light Source mid power led
Supply 220-240V
Dimmer phase cut
CRI ≥80
Electrical Class I
IP rating 65
Application wall
Diffuser borosilicate glass


Power 10W
Led Colour temp. 2700K - 3000K



		lm		white	sand	graphite	aluminium	corten	black	bronze
2700K	220-240V	399	Transparent Glass	902331002	902331003	902331004	902331005	902331008	9023310011	902331009
	10W@230V	376	Sandblasted Glass	902331012	902331013	902331014	902331015	902331018	9023310111	902331019
		lm		white	sand	graphite	aluminium	corten	black	bronze
3000K	220-240V	415	Transparent Glass	902311002	902311003	902311004	902311005	902311008	9023110011	902311009
	10W@230V	392	Sandblasted Glass	902311012	902311013	902311014	902311015	902311018	9023110111	902311019

Gler Sun

ceiling

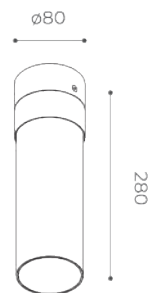

Available finishes:



Light Source mid power led
Supply 220-240V
Dimmer phase cut
CRI ≥80
Electrical Class I
IP rating 65
Application ceiling
Diffuser borosilicate glass


Power 10W
Led Colour temp. 2700K - 3000K



		lm		white	sand	graphite	aluminium	corten	black	bronze
2700K	220-240V	436	Transparent Glass	902331022	902331023	902331024	902331025	902331028	9023310211	902331029
	10W@230V	417	Sandblasted Glass	902331032	902331033	902331034	902331035	902331038	9023310311	902331039
		lm		white	sand	graphite	aluminium	corten	black	bronze
3000K	220-240V	455	Transparent Glass	902311022	902311023	902311024	902311025	902311028	9023110211	902311029
	10W@230V	435	Sandblasted Glass	902311032	902311033	902311034	902311035	902311038	9023110311	902311039

Gler Sun

bollard h500

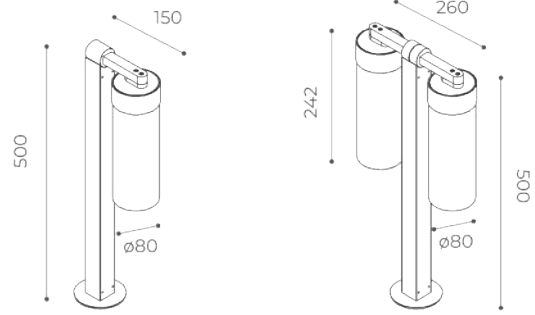

Available finishes:



Light Source mid power led
Supply 220-240V
Dimmer phase cut
CRI ≥80
Electrical Class I
IP rating 65
Application ground
Diffuser borosilicate glass

Power 10W - 2x10W
Led Colour temp. 2700K - 3000K




		lm		white	sand	graphite	aluminium	corten	black	bronze
2700K	220-240V	398	Transparent Glass	902331042	902331043	902331044	902331045	902331048	9023310411	902331049
	10W@230V	368	Sandblasted Glass	902331062	902331063	902331064	902331065	902331068	9023310611	902331069
		lm		white	sand	graphite	aluminium	corten	black	bronze
3000K	220-240V	414	Transparent Glass	902311042	902311043	902311044	902311045	902311048	9023110411	902311049
	10W@230V	383	Sandblasted Glass	902311062	902311063	902311064	902311065	902311068	9023110611	902311069
		lm		white	sand	graphite	aluminium	corten	black	bronze
2700K	220-240V	803	Transparent Glass	902331082	902331083	902331084	902331085	902331088	9023310811	902331089
	2X10W@230V	755	Sandblasted Glass	902331102	902331103	902331104	902331105	902331108	9023311011	902331109
		lm		white	sand	graphite	aluminium	corten	black	bronze
3000K	220-240V	836	Transparent Glass	902311082	902311083	902311084	902311085	902311088	9023110811	902311089
	2X10W@230V	787	Sandblasted Glass	902311102	902311103	902311104	902311105	902311108	9023111011	902311109

ACCESSORIES:

code 9062 | anchor bolts Ø88x165mm

Gler Sun

bollard h800

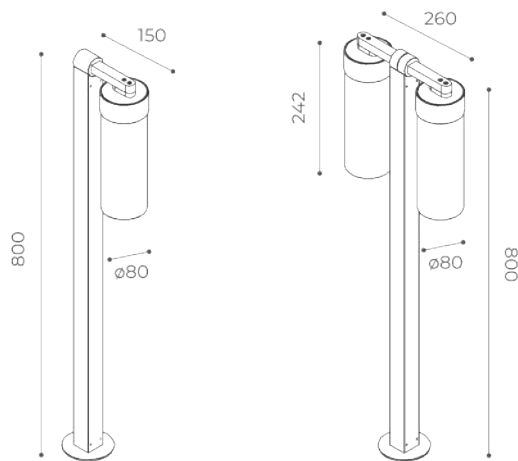

Available finishes:



Light Source mid power led
Supply 220-240V
Dimmer phase cut
CRI ≥80
Electrical Class I
IP rating 65
Application ground
Diffuser borosilicate glass

Power 10W - 2x10W
Led Colour temp. 2700K - 3000K



		lm		white	sand	graphite	aluminium	corten	black	bronze
2700K	220-240V	398	Transparent Glass	902331052	902331053	902331054	902331055	902331058	9023310511	902331059
	10W@230V	368	Sandblasted Glass	902331072	902331073	902331074	902331075	902331078	9023310711	902331079
		lm		white	sand	graphite	aluminium	corten	black	bronze
3000K	220-240V	414	Transparent Glass	902311052	902311053	902311054	902311055	902311058	9023110511	902311059
	10W@230V	383	Sandblasted Glass	902311072	902311073	902311074	902311075	902311078	9023110711	902311079
		lm		white	sand	graphite	aluminium	corten	black	bronze
2700K	220-240V	803	Transparent Glass	902331092	902331093	902331094	902331095	902331098	9023310911	902331099
	2X10W@230V	755	Sandblasted Glass	902331112	902331113	902331114	902331115	902331118	9023311211	902331129
		lm		white	sand	graphite	aluminium	corten	black	bronze
3000K	220-240V	836	Transparent Glass	902311092	902311093	902311094	902311095	902311098	9023110911	902311099
	2X10W@230V	787	Sandblasted Glass	902311112	902311113	902311114	902311115	902311118	9023111211	902311129

ACCESSORIES:
code 9062 | anchor bolts Ø88x165mm



Ulisse

BETWEEN WEIGHT AND LIGHTNESS

The pursuit of originality and the authenticity of Made in Italy by Diomedede find expression in Ulisse, a new decorative element that seems to emerge from sculpted stone.

Ulisse stands out for its compact and determined character: a solid presence that embraces the light source in a refined dialogue between weight and lightness.

Quarried in Tuscany, from the Cardoso stone caves in the heart of the Apuan Alps Park, the rock is composed of quartz, mica, and chlorite

This extremely durable material resists weathering and impact, making it ideal for outdoor applications.

Its grey-bluish tone, with its subtle lighter veins, together with the textured quality of its stratification, gives Ulisse a timeless elegance in perfect harmony with contemporary architecture.

Available with LED CRI≥80 in 2700K/3000K colour temperature, with integrated or 24V power supply (PWM dimmable), 10W.

La ricerca di originalità e l'autenticità del Made in Italy firmato Diomedede trovano espressione in Ulisse, nuovo elemento decorativo che sembra nascere da una roccia scolpita.

Ulisse si distingue per il suo carattere compatto e deciso: una presenza solida che accoglie la sorgente luminosa in un raffinato dialogo tra peso e leggerezza.

Estratta in Toscana, nelle cave di Cardoso nel cuore del Parco delle Alpi Apuane, la roccia che dà forma a Ulisse è composta da quarzo, mica e clorite.

Un materiale straordinariamente resistente, capace di resistere agli agenti atmosferici e agli urti, ideale per applicazioni in esterni.

Il suo colore grigio-bluastro, percorso da leggere venature più chiare, insieme alla matericità della stratificazione, conferisce a Ulisse un'eleganza senza tempo, perfettamente in sintonia con l'architettura contemporanea.

Disponibile con LED CRI≥80 in colorazione 2700K/3000K, alimentazione integrata o 24V (dimmabile pwm) 10W.














Ulisse

h300

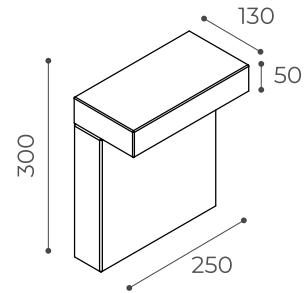

Available finishes:



Light Source mid power led
Supply 24V / 220-240V
Dimmer only 24V (PWM)
CRI ≥80
IP rating IP66
Electrical Class III, I
Application ground
Diffuser sandblasted tempered glass

Power 24V 10Wled / 220-240V 12,6We
Led Colour temp. 2700K / 3000K



lm				
2700K 10Wled 11We	24V	III	444	90273200 M

lm				
3000K 10Wled 11We	24V	III	468	90271200 M

lm				
2700K 10W@230V	220-240V	I	444	90273100 M



lm				
3000K 10W@230V	220-240V	I	468	90271100 M



L'installazione comporta l'utilizzo dell'apposito tirafondi in acciaio INOX (fornito con l'apparecchio).

È necessario prevedere un getto di cemento sotto al prodotto per garantirne la stabilità; è bene verificare la possibilità di installazione in base alla tipologia di superficie disponibile.

Ulisse ha un peso di circa 14Kg, pertanto è indispensabile effettuare un piccolo getto in cemento per dare stabilità all'installazione ed è altresì fondamentale seguire precisamente ogni passaggio dell'installazione per garantire anche l'impatto estetico del prodotto.

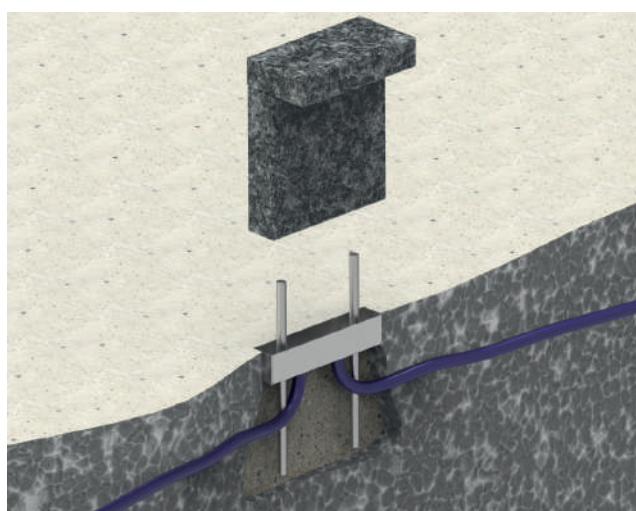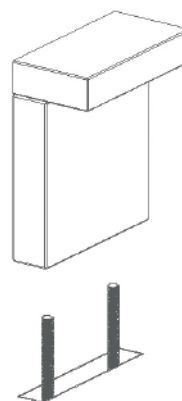

The installation requires the use of the dedicated stainless steel anchor bolts (supplied with the fixture).

A concrete foundation must be provided beneath the product to ensure stability, and the suitability of the installation must be verified according to the type of surface available.

Ulisse weighs approximately 14 kg; it is mandatory to prepare a small concrete foundation to provide stability to the installation. It is also extremely important to follow each installation step precisely in order to preserve the aesthetic impact of the product.





THE MOON
PAINTING BEYOND POLLOCK

Mimicry

THE ESSENCE OF ABSENCE

Mimicry is a decorative fixture that integrates perfectly into architecture, suitable for wall installation.

The base is made of die-cast aluminium, treated with cathoresis and a layer of polyester powder paint resistant to outdoor environments.

A key feature is the baked clay cover, with a textured feel, which can be used in its natural state or painted with water-based colours, making it fully customizable by the end user.

- Mimicry is sold ready to be painted; if you want to use it with a natural finish, it must be specified when ordering, and a specific protective treatment will be applied.
- The base of Mimicry is only available in white.

Mimicry è un apparecchio decorativo che si integra perfettamente nell'architettura, adatto all'installazione a parete.

La base è in alluminio pressofuso, con trattamento di cataforesi e strato di vernice di polvere di poliestere resistente agli ambienti esterni.


Caratteristica è la cover in argilla cotta, dal gusto materico, utilizzabile al naturale o verniciabile con colori a base d'acqua, rendendola totalmente personalizzabile dall'utente finale.

- *Mimicry è venduta per essere verniciata, se si vuole utilizzare con effetto naturale va indicato in fase d'ordine, verrà così eseguito un trattamento protettivo specifico.*
- *La base di mimicry è disponibile solo in colore bianco.*





Mimicry Round

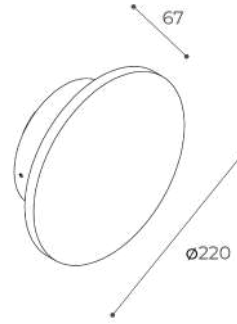

Available finishes:



Light Source mid power led
Supply 220-240V
CRI ≥80
Electrical Class I
IP rating 65
Application wall
Diffuser transparent polycarbonate
Shape round

Power 220-240v 10Wled - 13We
Led Colour temp. 2700K/3000K
Emission 360°



		lm	natural clay
2700K	220-240V	597	901831000
10Wled			
13We			


		lm	natural clay
3000K	220-240V	629	901811000
10Wled			
13We			



Mimicry is sold ready to be painted; if you want to use it with its natural finish, it must be specified when ordering, and a specific protective treatment will be applied. After treatment the fixture can't be painted.

Mimicry è venduta per essere verniciata, se si vuole utilizzare con effetto naturale va indicato in fase d'ordine, verrà così eseguito un trattamento protettivo specifico. Il prodotto trattato non può essere verniciato.

Mimicry Square

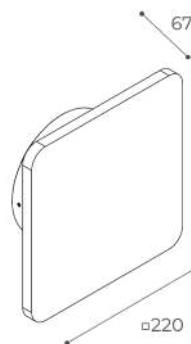

Available finishes:



natural clay

Light Source mid power led
Supply 220-240V
CRI ≥80
Electrical Class I
IP rating 65
Application wall
Diffuser transparent polycarbonate
Shape square

Power 220-240v 10Wled - 13We
Led Colour temp. 2700K/3000K
Emission 360°



		lm	natural clay
2700K 10Wled 13We	220-240V	593	901831010

		lm	natural clay
3000K 10Wled 13We	220-240V	625	901811010



Mimicry is sold ready to be painted; if you want to use it with its natural finish, it must be specified when ordering, and a specific protective treatment will be applied. After treatment the fixture can't be painted.

Mimicry è venduta per essere verniciata, se si vuole utilizzare con effetto naturale va indicato in fase d'ordine, verrà così eseguito un trattamento protettivo specifico. Il prodotto trattato non può essere verniciato.



Dotlight

DISCRETION AND FUNCTIONALITY

Family of downlight made of die-cast and extruded aluminium characterized by a simple line and recessed optics.

Metal parts follow a cathaphoresis treatment and then painted in polyester powder.

Available in three sizes (Ø50, Ø70, Ø110), all with on-off power supply housed in an IP box connected via a special connector for quick replacement.

The 24V version instead allows for centralized dimming with a special remote power supply.

All models can have or a transparent or sandblasted diffuser, fixed with silicone glue through a robotic system to ensure IP protection.

Honeycomb can be placed in a second time and treated as an accessory.

The spring fastening system allows good adaptability to the different types of ceiling.

Famiglia di incassi da soffitto in alluminio pressofuso ed estruso di alluminio da una linea semplice e con la caratteristica di un'ottica arretrata.




Le parti metalliche sono trattate con cataforesi e quindi verniciate in polvere di poliestere.


Disponibile in tre dimensioni (Ø50, Ø70, Ø110), tutti con alimentazione on-off alloggiata in un box IP collegato tramite apposito connettore per una rapida sostituzione.

La versione a 24V permette invece una dimmerazione centralizzata con apposito alimentatore remoto.

L'honeycomb può essere inserito in un secondo momento ed è quindi trattato come accessorio.

Il sistema di fissaggio a molla permette una buona adattabilità alle diverse tipologie di soffitto.

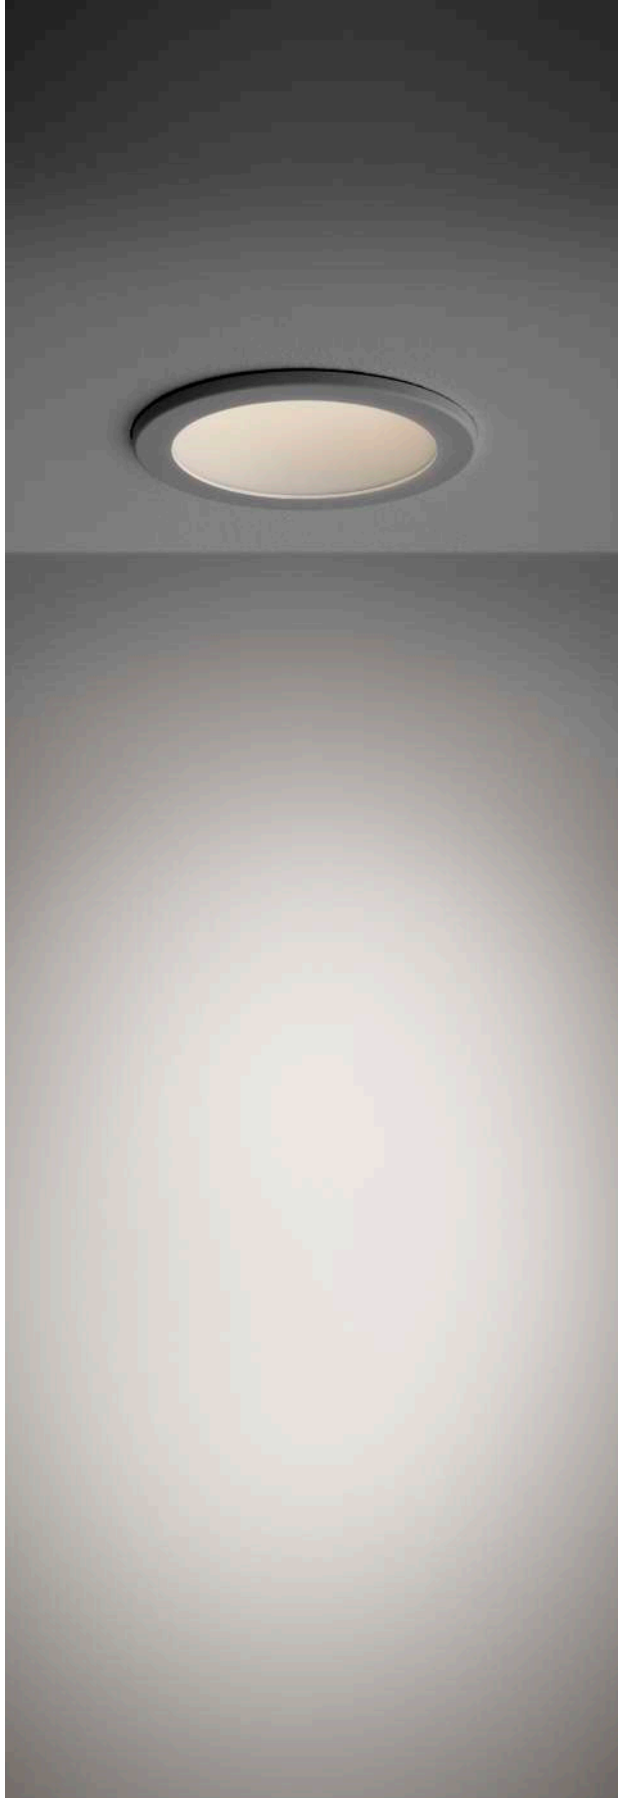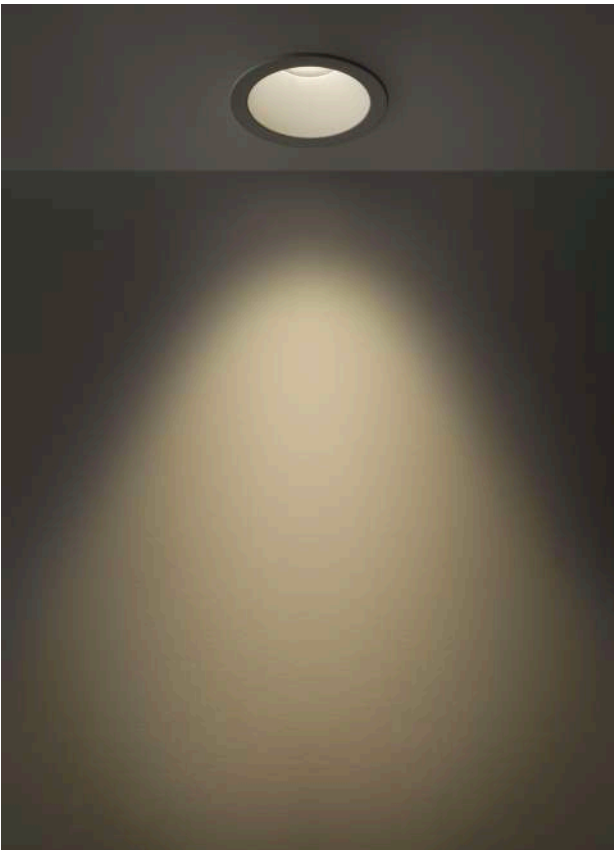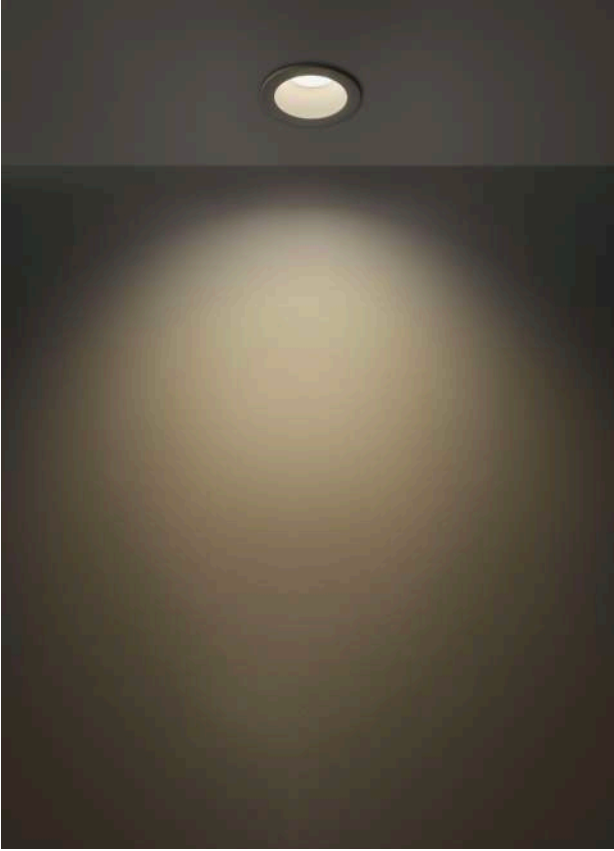


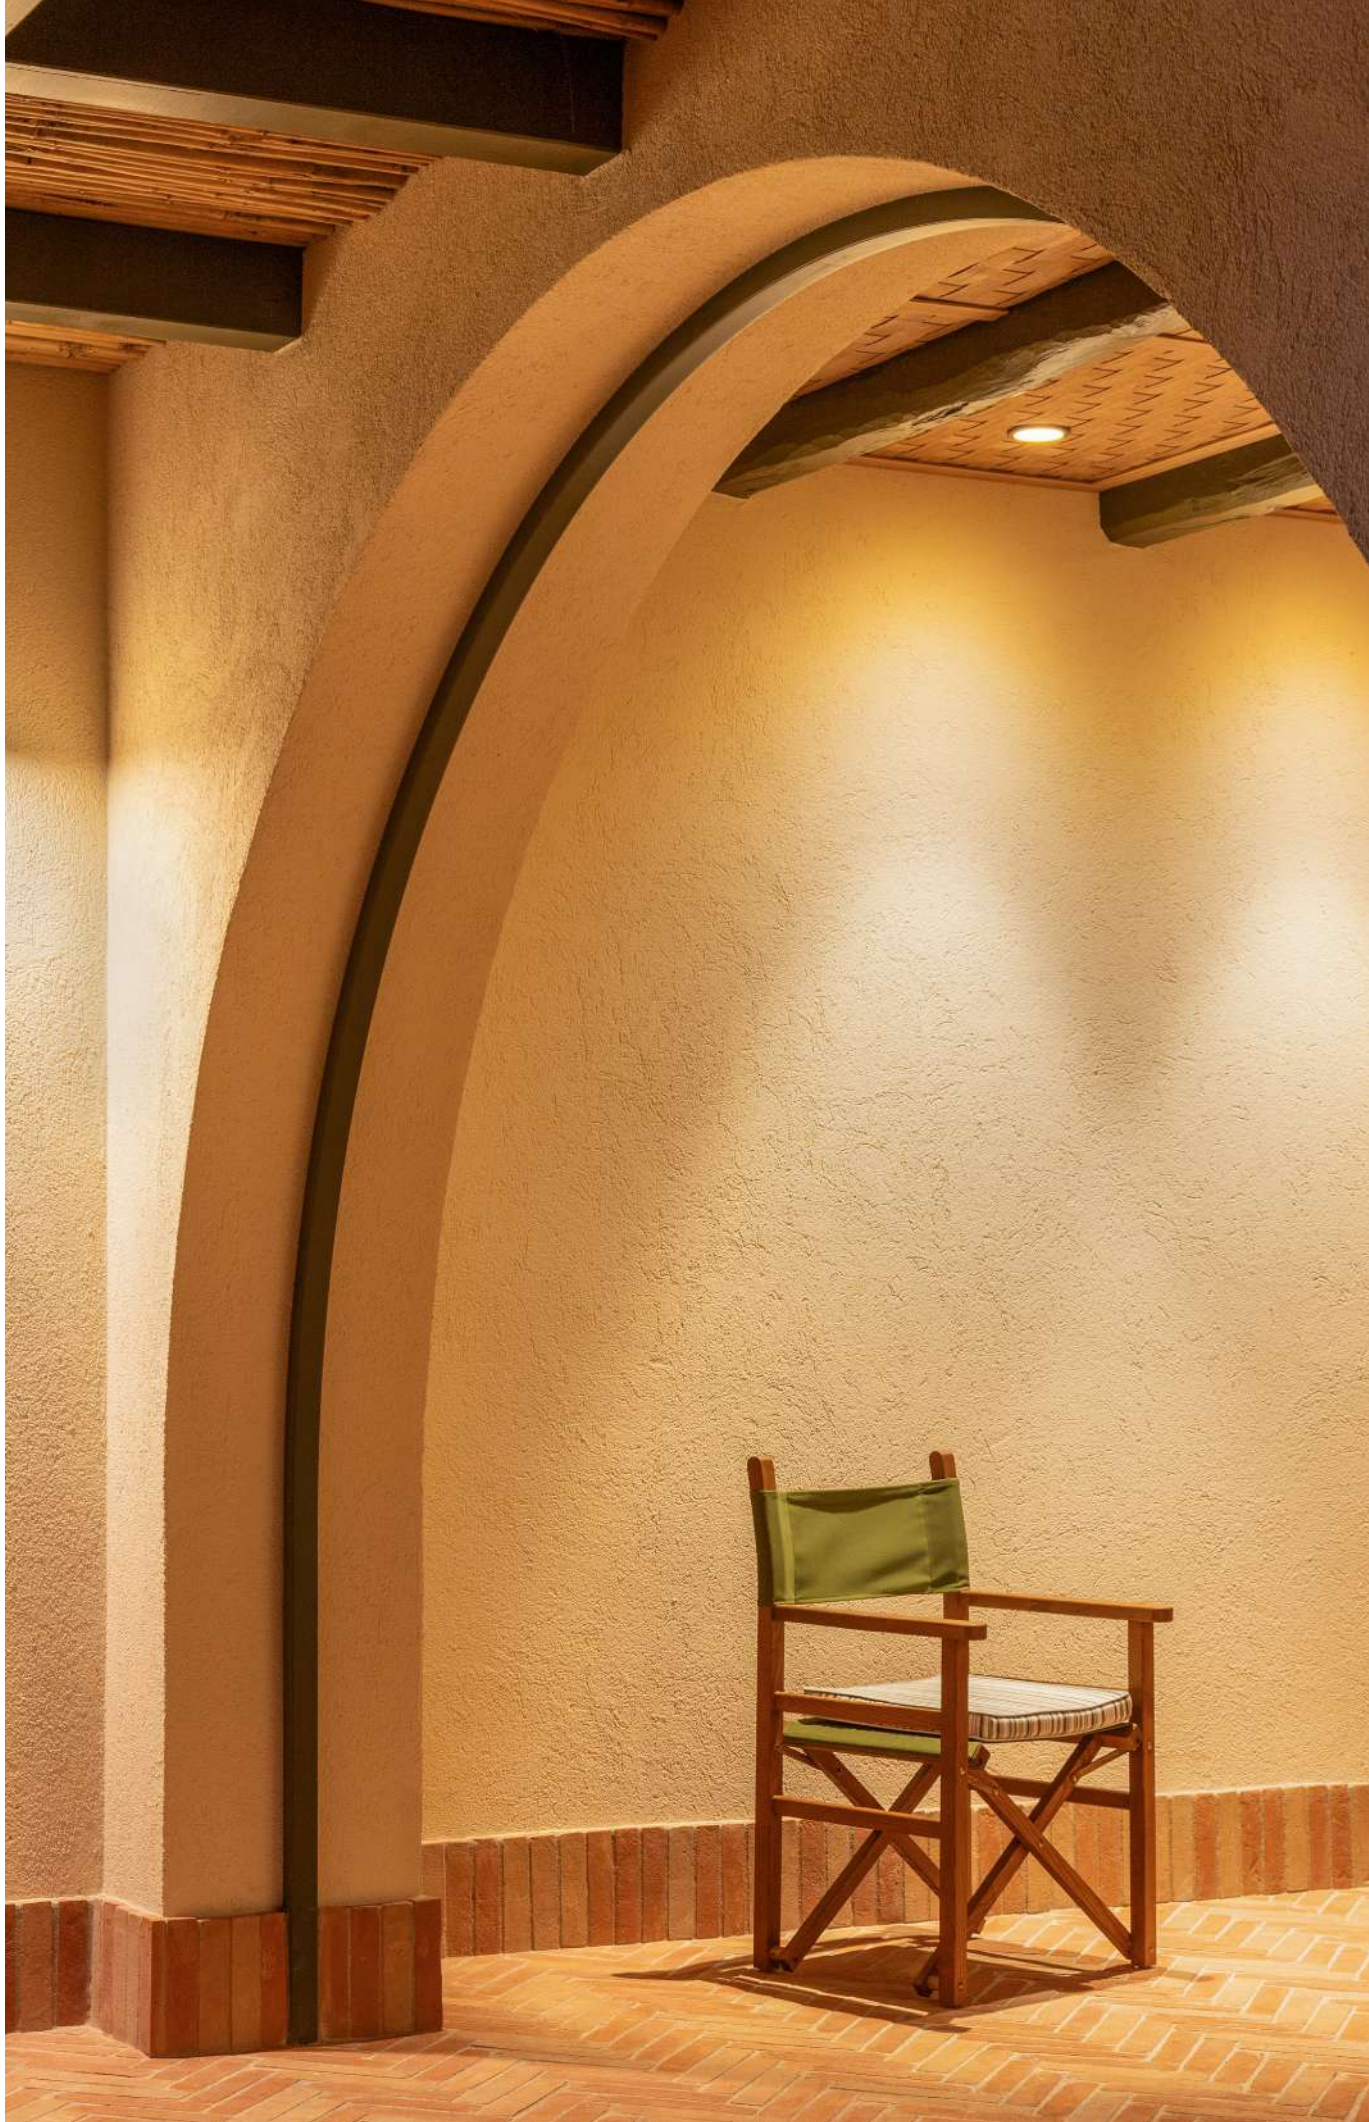



Dotlight

Ø50






Available finishes:





-  white
-  sand
-  graphite
-  aluminium
-  corten
-  bronze





Light Source power led
Supply 24V / 220-240V
Dimmer only 24V (PWM)
CRI ≥80
Electrical Class II, III
IP rating 66
Application downlight
Diffuser transparent / sandblated diffuser





Power 24V 2Wled - 3,5We
 220-240V 2Wled - 4We
Led Colour temp.: 2700K/3000k



				lm	white	sand	graphite	aluminium	corten	bronze
2700K 2Wled 3,5We	24V	III	 14°	903332002	903332003	903332004	903332005	903332008	903332009	
			 28°	903332012	903332013	903332014	903332015	903332018	903332019	
			 45°	903332022	903332023	903332024	903332025	903332028	903332029	
			 diffused	903332032	903332033	903332034	903332035	903332038	903332039	


3000K 2Wled 3,5We	24V	III	 14°	903312002	903312003	903312004	903312005	903312008	903312009
			 28°	903312012	903312013	903312014	903312015	903312018	903312019
			 45°	903312022	903312023	903312024	903312025	903312028	903312029
			 diffused	903312022	903312023	903312024	903312025	903312028	903312029

				lm	white	sand	graphite	aluminium	corten	bronze
2700K 2Wled 4We	220-240V	II	 14°	903331002	903331003	903331004	903331005	903331008	903331009	
			 28°	903331012	903331013	903331014	903331015	903331018	903331019	
			 45°	903331022	903331023	903331024	903331025	903331028	903331029	
			 diffused	903331032	903331033	903331034	903331035	903331038	903331039	

3000K 2Wled 4We	220-240V	II	 14°	903311002	903311003	903311004	903311005	903311008	903311009
			 28°	903311012	903311013	903311014	903311015	903311018	903311019
			 45°	903311022	903311023	903311024	903311025	903311028	903311029
			 diffused	903311032	903311033	903311034	903311035	903311038	903311039

Dotlight

Ø70



Available finishes:



Light Source power led
Supply 24V / 220-240V
Dimmer only 24V (PWM)
CRI ≥80
Electrical Class II, III
IP rating 66
Application downlight
Diffuser transparent / sandblated diffuser

Power 24V 5,8Wled - 6,3We
 220-240V 5,8Wled - 6,2We
Led Colour temp.: 2700K/3000k



				lm	white	sand	graphite	aluminium	corten	bronze
2700K 4,2Wled 5We	24V	III		10°	903332042	903332043	903332044	903332045	903332048	903332049
				26°	903332052	903332053	903332054	903332055	903332058	903332059
				52°	903332062	903332063	903332064	903332065	903332068	903332069
				diffused	903332072	903332073	903332074	903332075	903332078	903332079


3000K 4,2Wled 5We	24V	III		10°	903312042	903312043	903312044	903312045	903312048	903312049
				26°	903312052	903312053	903312054	903312055	903312058	903312059
				52°	903312062	903312063	903312064	903312065	903312068	903312069
				diffused	903312072	903312073	903312074	903312075	903312078	903312079

				lm	white	sand	graphite	aluminium	corten	bronze
2700K 4,2Wled 6,2We	220-240V	II		10°	903331042	903331043	903331044	903331045	903331048	903331049
				26°	903331052	903331053	903331054	903331055	903331058	903331059
				52°	903331062	903331063	903331064	903331065	903331068	903331069
				diffused	903331072	903331073	903331074	903331075	903331078	903331079

3000K 4,2Wled 6,2We	220-240V	II		10°	903311042	903311043	903311044	903311045	903311048	903311049
				26°	903311052	903311053	903311054	903311055	903311058	903311059
				52°	903311062	903311063	903311064	903311065	903311068	903311069
				diffused	903311072	903311073	903311074	903311075	903311078	903311079

Dotlight

Ø110







Available finishes:





-  white
-  sand
-  graphite
-  aluminium
-  corten
-  bronze





Light Source power led
Supply 24V / 220-240V
Dimmer only 24V (PWM)
CRI ≥80
Electrical Class II, III
IP rating 66
Application downlight
Diffuser transparent / sandblated diffuser





Power 24V 9Wled -10,5We
 220-240V 9Wled - 12We
Led Colour temp.: 2700K/3000k



				lm	white	sand	graphite	aluminium	corten	bronze
2700K 9Wled 10,5We	24V	III	 15°		903332082	903332083	903332084	903332085	903332088	903332089
			 36°		903332092	903332093	903332094	903332095	903332098	903332099
			 60°		903332102	903332103	903332104	903332105	903332108	903332109
			 diffused		903332112	903332113	903332114	903332115	903332118	903332119


3000K 9Wled 10,5We	24V	III	 15°		903312082	903312083	903312084	903312085	903312088	903312089
			 36°		903312092	903312093	903312094	903312095	903312098	903312099
			 60°		903312102	903312103	903312104	903312105	903312108	903312109
			 diffused		903312112	903312113	903312114	903312115	903312118	903312119

				lm	white	sand	graphite	aluminium	corten	bronze
2700K 9Wled 12We	220-240V	II	 15°		903331082	903331083	903331084	903331085	903331088	903331089
			 36°		903331092	903331093	903331094	903331095	903331098	903331099
			 60°		903331102	903331103	903331104	903331105	903331108	903331109
			 diffused		903331112	903331113	903331114	903331115	903331118	903331119

3000K 9Wled 12We	220-240V	II	 15°		903311082	903311083	903311084	903311085	903311088	903311089
			 36°		903311092	903311093	903311094	903311095	903311098	903311099
			 60°		903311102	903311103	903311104	903311105	903311108	903311109
			 diffused		903311112	903311113	903311114	903311115	903311118	903311119




ACCESSORIES




Power supply 8V 110-2240V IP54
44x46x26mm
(for recessed box 9018 and 9019)

code **9037**




Power supply 24V DC 70W IP67
267x79x52mm

code **9049**




Power supply 24V 16Watt IP20
118x52x26mm

code **9006**




Power supply 24V DC 150W IP67
267x79x52mm

code **9057**



Power supply 24V 20Watt IP20
103x67x21mm


code **9007**



Honeycomb Dotlight 50


code **9090**

23mm



Power supply 24V 50Watt IP20
190x60x36mm


code **9008**



Honeycomb Dotlight 70


code **9091**

37mm



Power supply 16W 110-240V IP65
125x61x31mm

code **9059**



Honeycomb Dotlight 110

code **9092**

54mm

ACCESSORIES:

code **9037 / 9006 / 9007 / 9008 / 9059 / 9049 / 9057**

code **honeycomb dotlight 9090 / 9091 / 9092**



Noctis

ELEGANT PUNCTUALITY

The purity of the lines that trace a simple geometry is the main characteristic of Noctis: a family of roof lighting fittings sophisticated in its linearity and lightness.

Available in three different dimensions (Ø40, Ø60, Ø80) all with integrated power supply or in 24V version.

Made of high-quality aluminium, turned, anodized and then painted in polyester powder.

Robotically fixed tempered glass with silicone glue.

Ceiling fixing is done using screws and stainless steel side set screws.

La purezza delle linee che tracciano una geometria semplice è la caratteristica di Noctis: famiglia di apparecchi da plafone sofisticata nella sua linearità e leggerezza.

Disponibile in tre formati differenti (Ø40, Ø60, Ø80) tutti con alimentazione integrata o in versione 24V.

Corpo in alluminio di lega primaria tornito, trattato con anodizzazione e successivamente verniciato in polvere di poliestere.


Vetro temprato fissato roboticamente con collante siliconico.

Il fissaggio a soffitto avviene tramite viti e grani laterali in acciaio inox.








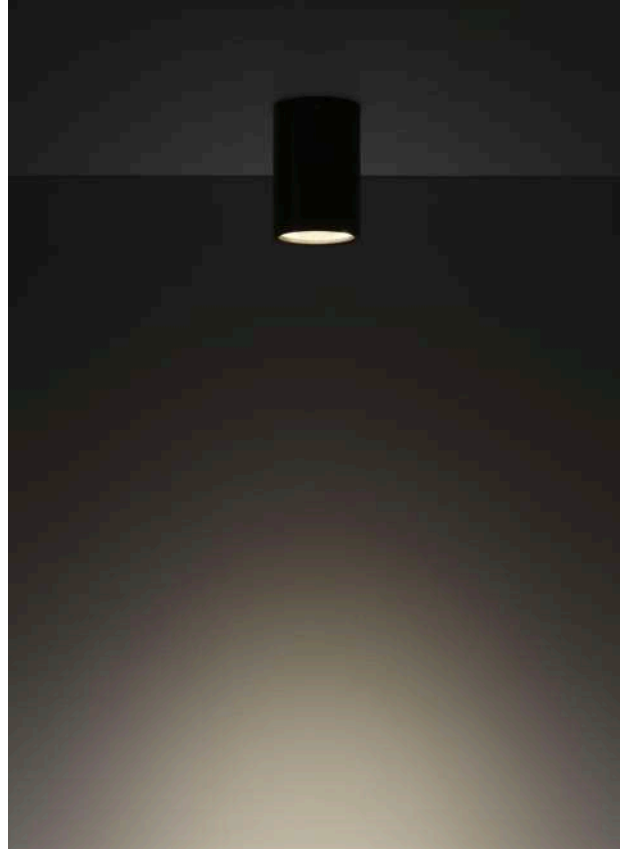

Noctis

Ø40

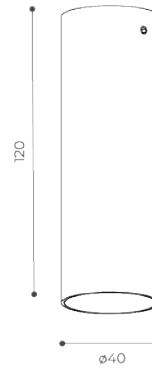

Available finishes:



Light Source
Supply
Dimmer
CRI
IP rating
Electrical Class
Application
Diffuser

power led
 24V / 220-240V
 only 24V (PWM)
 ≥80
 IP66
 II, III
 ceiling
 tempered transparente glass


Power 24V 2Wled - 3We
 220-240V 2Wled - 4We
Led Colour temp. 2700K / 3000K



				lm	white	sand	graphite	aluminium	corten	green
2700K 2Wled 3We	24V III	14° ▲	with honeycomb		903232002	903232003	903232004	903232005	903232008	903232016
		14° ▲	without honeycomb		903232012	903232013	903232014	903232015	903232018	903232016
		28° ▲	with honeycomb		903232022	903232023	903232024	903232025	903232028	903232026
		28° ▲	without honeycomb		903232032	903232033	903232034	903232035	903232038	903232036
		45° ▲	without honeycomb		903232042	903232043	903232044	903232045	903232048	903232046
3000K 2Wled 3We	24V III	14° ▲	with honeycomb		903212002	90321003	90321004	90321005	90321008	903210016
		14° ▲	without honeycomb		903212012	90321013	90321014	90321015	90321018	903210116
		28° ▲	with honeycomb		903212022	90321023	90321024	90321025	90321028	903210216
		28° ▲	without honeycomb		903212032	90321033	90321034	90321035	90321038	903210316
		45° ▲	without honeycomb		903212042	90321043	90321044	90321045	90321048	903210416
2700K 2Wled 4We	220-240V II	14° ▲	with honeycomb		903231002	903231003	903231004	903231005	903231008	9032310016
		14° ▲	without honeycomb		903231012	903231013	903231014	903231015	903231018	9032310116
		28° ▲	with honeycomb		903231022	903231023	903231024	903231025	903231028	9032310216
		28° ▲	without honeycomb		903231032	903231033	903231034	903231035	903231038	9032310316
		45° ▲	without honeycomb		903231042	903231043	903231044	903231045	903231048	9032310416
3000K 2Wled 4We	220-240V II	14° ▲	with honeycomb		903211002	903211003	903211004	903211005	903211008	9032110016
		14° ▲	without honeycomb		903211012	903211013	903211014	903211015	903211018	9032110116
		28° ▲	with honeycomb		903211022	903211023	903211024	903211025	903211028	9032110216
		28° ▲	without honeycomb		903211032	903211033	903211034	903211035	903211038	9032110316
		45° ▲	without honeycomb		903211042	903211043	903211044	903211045	903211048	9032110416

Noctis

Ø60

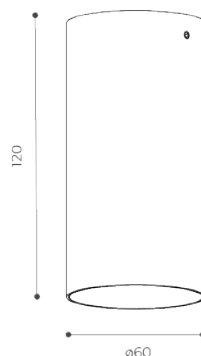

Available finishes:



Light Source
Supply
Dimmer
CRI
IP rating
Electrical Class
Application
Diffuser

power led
 24V / 220-240V
 only 24V (PWM)
 ≥80
 IP66
 II, III
 ceiling
 tempered transparente glass


Power 24V 2Wled - 3We
 220-240V 2Wled - 4We
Led Colour temp. 2700K / 3000K



				lm	white	sand	graphite	aluminium	corten	green
2700K 4,2Wled 5We	24V III	10° ▲	with honeycomb	903232052	903232053	903232054	903232055	903232058	9032320516	
		10° ▲	without honeycomb	903232062	903232063	903232064	903232065	903232068	9032320616	
		26° ▲	with honeycomb	903232072	903232073	903232074	903232075	903232078	9032320716	
		26° ▲	without honeycomb	903232082	903232083	903232084	903232085	903232088	9032320816	
		52° ▲	without honeycomb	903232092	903232093	903232094	903232095	903232098	9032320916	
3000K 4,2Wled 5We	24V III	10° ▲	with honeycomb	903212052	903212053	903212054	903212055	903212058	9032120516	
		10° ▲	without honeycomb	903212062	903212063	903212064	903212065	903212068	9032120616	
		26° ▲	with honeycomb	903212072	903212073	903212074	903212075	903212078	9032120716	
		26° ▲	without honeycomb	903212082	903212083	903212084	903212085	903212088	9032120816	
		52° ▲	without honeycomb	903212092	903212093	903212094	903212095	903212098	9032120916	
2700K 4,2Wled 6,2We	220-240V II	10° ▲	with honeycomb	903231052	903231053	903231054	903231055	903231058	9032310516	
		10° ▲	without honeycomb	903231062	903231063	903231064	903231065	903231068	9032310616	
		26° ▲	with honeycomb	903231072	903231073	903231074	903231075	903231078	9032310716	
		26° ▲	without honeycomb	903231082	903231083	903231084	903231085	903231088	9032310816	
		52° ▲	without honeycomb	903231092	903231093	903231094	903231095	903231098	9032310916	
3000K 4,2Wled 6,2We	220-240V II	10° ▲	with honeycomb	903211052	903211053	903211054	903211055	903211058	9032110516	
		10° ▲	without honeycomb	903211062	903211063	903211064	903211065	903211068	9032110616	
		26° ▲	with honeycomb	903211072	903211073	903211074	903211075	903211078	9032110716	
		26° ▲	without honeycomb	903211082	903211083	903211084	903211085	903211088	9032110816	
		52° ▲	without honeycomb	903211092	903211093	903211094	903211095	903211098	9032110916	

Noctis

Ø80

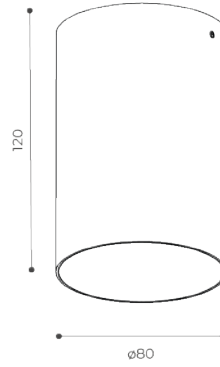

Available finishes:



Light Source
Supply
Dimmer
CRI
IP rating
Electrical Class
Application
Diffuser


cob led
24V / 220-240V
only 24V (PWM)
≥80
IP66
II, III
ceiling
tempered transparente glass

Power 24V 2Wled - 3We
220-240V 2Wled - 4We
Led Colour temp. 2700K / 3000K




				lm	white	sand	graphite	aluminium	corten	green
2700K 6,3Wled 7We	24V III	15° ▲	with honeycomb		903232102	903232103	903232104	903232105	903232108	903232106
		15° ▲	without honeycomb		903232112	903232113	903232114	903232115	903232118	903232116
		36° ▲	with honeycomb		903232122	903232123	903232124	903232125	903232128	903232126
		36° ▲	without honeycomb		903232132	903232133	903232134	903232135	903232138	903232136
		60° ▲	without honeycomb		903232142	903232143	903232144	903232145	903232148	903232146
3000K 6,3Wled 7We	24V III	15° ▲	with honeycomb		903212102	903212103	903212104	903212105	903212108	903212106
		15° ▲	without honeycomb		903212112	903212113	903212114	903212115	903212118	903212116
		36° ▲	with honeycomb		903212122	903212123	903212124	903212125	903212128	903212126
		36° ▲	without honeycomb		903212132	903212133	903212134	903212135	903212138	903212136
		60° ▲	without honeycomb		903212142	903212143	903212144	903212145	903212148	903212146
2700K 6,3Wled 8We	220-240V II	15° ▲	with honeycomb		903231102	903231103	903231104	903231105	903231108	903231106
		15° ▲	without honeycomb		903231112	903231113	903231114	903231115	903231118	903231116
		36° ▲	with honeycomb		903231122	903231123	903231124	903231125	903231128	903231126
		36° ▲	without honeycomb		903231132	903231133	903231134	903231135	903231138	903231136
		60° ▲	without honeycomb		903231142	903231143	903231144	903231145	903231148	903231146
3000K 6,3Wled 8We	220-240V II	15° ▲	with honeycomb		903211102	903211103	903211104	903211105	903211108	903211106
		15° ▲	without honeycomb		903211112	903211113	903211114	903211115	903211118	903211116
		36° ▲	with honeycomb		903211122	903211123	903211124	903211125	903211128	903211126
		36° ▲	without honeycomb		903211132	903211133	903211134	903211135	903211138	903211136
		60° ▲	without honeycomb		903211142	903211143	903211144	903211145	903211148	903211146

ACCESSORIES




Power supply 8V 110-2240V IP54
44x46x26mm
(for recessed box 9018 and 9019)

code **9037**




Power supply 24V DC 70W IP67
267x79x52mm

code **9049**




Power supply 24V 16Watt IP20
118x52x26mm

code **9006**




Power supply 24V DC 70W IP67
267x79x52mm

code **9057**




Power supply 24V 20Watt IP20
103x67x21mm

code **9007**



Power supply 24V 50Watt IP20
190x60x36mm

code **9008**



Power supply 16W 110-240V IP65
125x61x31mm

code **9059**

ACCESSORIES:

code **9037 / 9006 / 9007 / 9008 / 9059 / 9049 / 9057**



Itaca

CONTEMPORANEITY AND MINIMALISM

The purity of the lines that define a simple geometry makes ITACA a wall-mounted fixture sophisticated in its linearity and lightness.

Available in four different sizes (45, 90, 135, 180) with power ratings range from 1.9 W to 8.7 W in the largest version, all models feature an integrated power supply (on/off for the 45 model, phase-cut dimmable for the others) also available in 24V version.

The body is made of primary-alloy aluminium, treated with anodisation and coated with polyester powder.

The textured, sandblasted glass ensures optimal light uniformity and is robotically bonded using silicone adhesive.

IP66 protection is ensured by polyurethane resin that fully isolates all sensitive electronic components.

La purezza delle linee che tracciano una geometria semplice, queste caratteristiche rendono ITACA una lampada a parete sofisticata nella sua linearità e leggerezza.

Disponibile in 4 formati differenti (45, 90, 135, 180) e con potenze fra gli 1,9W e 8,7W nella versione più grande, tutti con alimentazione integrata (on /off per il modello 45, dimmerabile phase-cut per gli altri) o in versione 24V.

Corpo in alluminio di lega primaria, trattato con anodizzazione e verniciato in polvere di poliestere.

Vetro texturizzato e sabbiato per una migliore uniformità emissiva, fissato roboticamente con collante silicico.

La protezione IP66 è garantita dalla resina poliuretana che isola perfettamente tutte le parti elettroniche sensibili.










Itaca 45

wall

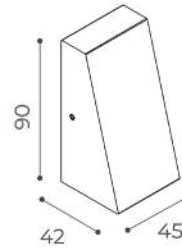

Available finishes:



Light Source
Supply
Dimmer
CRI
IP rating
Electrical Class
Application
Diffuser

mid power led
 24V / 220-240V
 only 24V (PWM)
 ≥80
 IP66
 II, III
 wall
 texturized sandblasted glass


Power 24V 1,5Wled-1,9We
 220-240V 1,5Wled - 3,3We
Led Colour temp. 2700K / 3000K



				white	sand	graphite	aluminium	corten	green
2700K 1,5Wled 1,9We	24V	III	lm	903032002	903032003	903032004	903032005	903032008	9030320016
3000K 1,5Wled 1,9We	24V	III	lm	903012002	903012003	903012004	903012005	903012008	9030120016
2700K 1,5Wled 3,3We	220-240V	II	lm	903031002	903031003	903031004	903031005	903031008	9030310016
3000K 1,5Wled 3,3We	220-240V	II	lm	903011002	903011003	903011004	903011005	903011008	9030110016

Itaca 90

wall

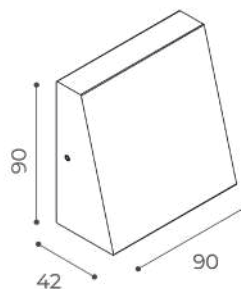

Available finishes:

- white
- sand
- graphite
- aluminium
- corten
- olive green

Light Source mid power led
Supply 24V / 220-240V
Dimmer only 24V (PWM)
CRI ≥80
IP rating IP66
Dimmer phase cut 220-240V
Electrical Class II, III
Application wall
Diffuser texturized sandblasted glass


Power 24V 3,4Wled-4,1We
 220-240V 3,4Wled - 4,8We
Led Colour temp. 2700K / 3000K



				white	sand	graphite	aluminium	corten	green
2700K 3,4Wled 4,1We	24V	III	lm	903032012	903032013	903032014	903032015	903032018	9030320116
3000K 3,4Wled 4,1We	24V	III	lm	903012012	903012013	903012014	903012015	903012018	9030120116
2700K 3,4Wled 4,8We	220-240V	II	lm	903031012	903031013	903031014	903031015	903031018	9030310116
3000K 3,4Wled 4,8We	220-240V	II	lm	903011012	903011013	903011014	903011015	903011018	9030110116

Itaca 135

wall

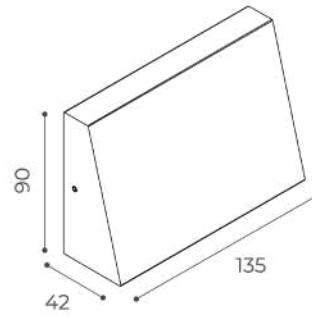

Available finishes:



Light Source mid power led
Supply 24V / 220-240V
Dimmer only 24V (PWM)
CRI ≥80
IP rating IP66
Dimmer phase cut 220-240V
Electrical Class II, III
Application wall
Diffuser texturized sandblasted glass


Power 24V 4,9Wled-6We
 220-240V 4,9Wled - 6,5We
Led Colour temp. 2700K / 3000K



				white	sand	graphite	aluminium	corten	green
2700K 4,9Wled 6We	24V	III	lm	903032022	903032023	903032024	903032025	903032028	9030320216
3000K 4,9Wled 6We	24V	III	lm	903012022	903012023	903012024	903012025	903012028	9030120216
2700K 4,9Wled 6,5We	220-240V	II	lm	903031022	903031023	903031024	903031025	903031028	9030310216
3000K 4,9Wled 6We	220-240V	II	lm	903011022	903011023	903011024	903011025	903011028	9030110216

Itaca 180

wall

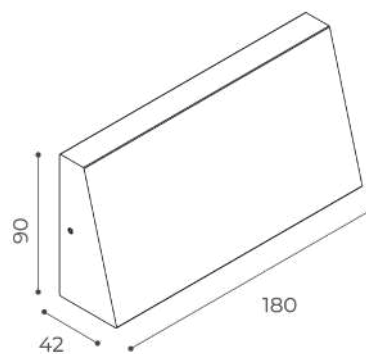

Available finishes:



Light Source mid power led
Supply 24V / 220-240V
Dimmer only 24V (PWM)
CRI ≥80
IP rating IP66
Dimmer phase cut 220-240V
Electrical Class II, III
Application wall
Diffuser texturized sandblasted glass


Power 24V 6,6Wled-8We
 220-240V 6,6Wled - 8,7We
Led Colour temp. 2700K / 3000K



				white	sand	graphite	aluminium	corten	green
2700K 6,6Wled 8We	24V	III	lm	903032032	903032033	903032034	903032035	903032038	9030320316
3000K 6,6Wled 8We	24V	III	lm	903012032	903012033	903012034	903012035	903012038	9030120316
2700K 6,6Wled 8,7We	220-240V	II	lm	903031032	903031033	903031034	903031035	903031038	9030310316
3000K 6,6Wled 8,7We	220-240V	II	lm	903011032	903011033	903011034	903011035	903011038	9030110316




ACCESSORIES




Power supply 16W 110-240V IP65
125x61x31mm

code **9059**




Recessed box
71x71x53,5mm
For Itaca 90 and 135

code **9018**




Power supply 24V DC 70W IP67
267x79x52mm

code **9049**




Recessed box
74x106x53,5mm
For Itaca 135 and 180

code **9019**



Power supply 24V DC 150W IP67
267x79x52mm

code **9057**



Recessed box
74X132X53,5mm
For Itaca 180

code **9089**

ACCESSORIES:

code **9059 / 9049 / 9057 / 9018 / 9019 / 9089**



Metoo

EMOTION IN LIGHT

Metoo Wall or ceiling fixture made of high-quality aluminum, treated with cataphoresis and coated with a layer of polyester powder resistant to outdoor environments.

Minimalistic and elegant, with compact dimensions to easily integrate into all architectural designs.



The LED module, available in 2700K and 3000K colour temperatures, is silicon-sealed inside a transparent capsule attached to the body.

The light is reflected and diffused, making it a functional and discreet fixture.

Apparecchio da parete o soffitto in alluminio di primaria qualità, con trattamento di cataforesi e rivestito da uno strato di polvere di poliestere resistente agli ambienti esterni.

Minimale ed elegante, dalle ridotte dimensioni per integrarsi facilmente in tutte le architetture.


Il modulo led, disponibile nelle colorazioni 2700K e 3000K, è siliconato all'interno di una capsula trasparente fissata al corpo, la luce è riflessa e diffusa, caratteristica che lo rende un apparecchio funzionale e discreto.

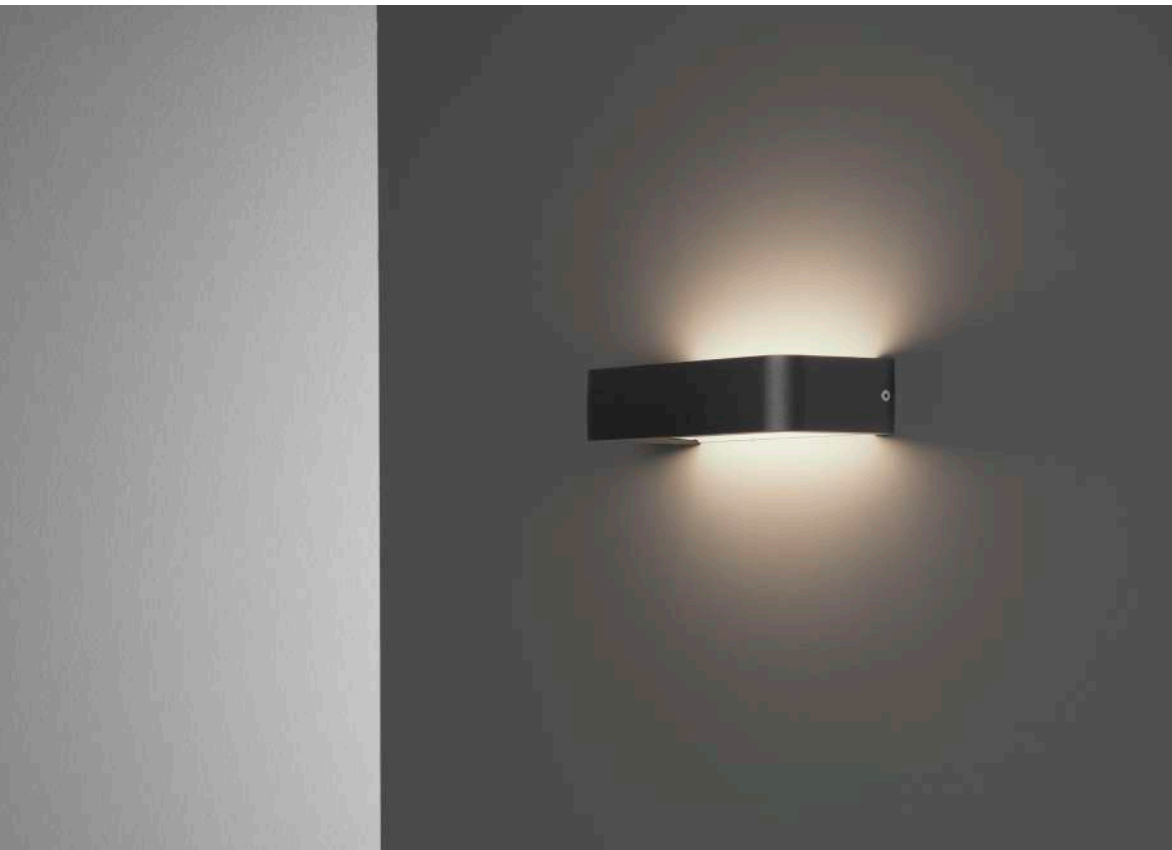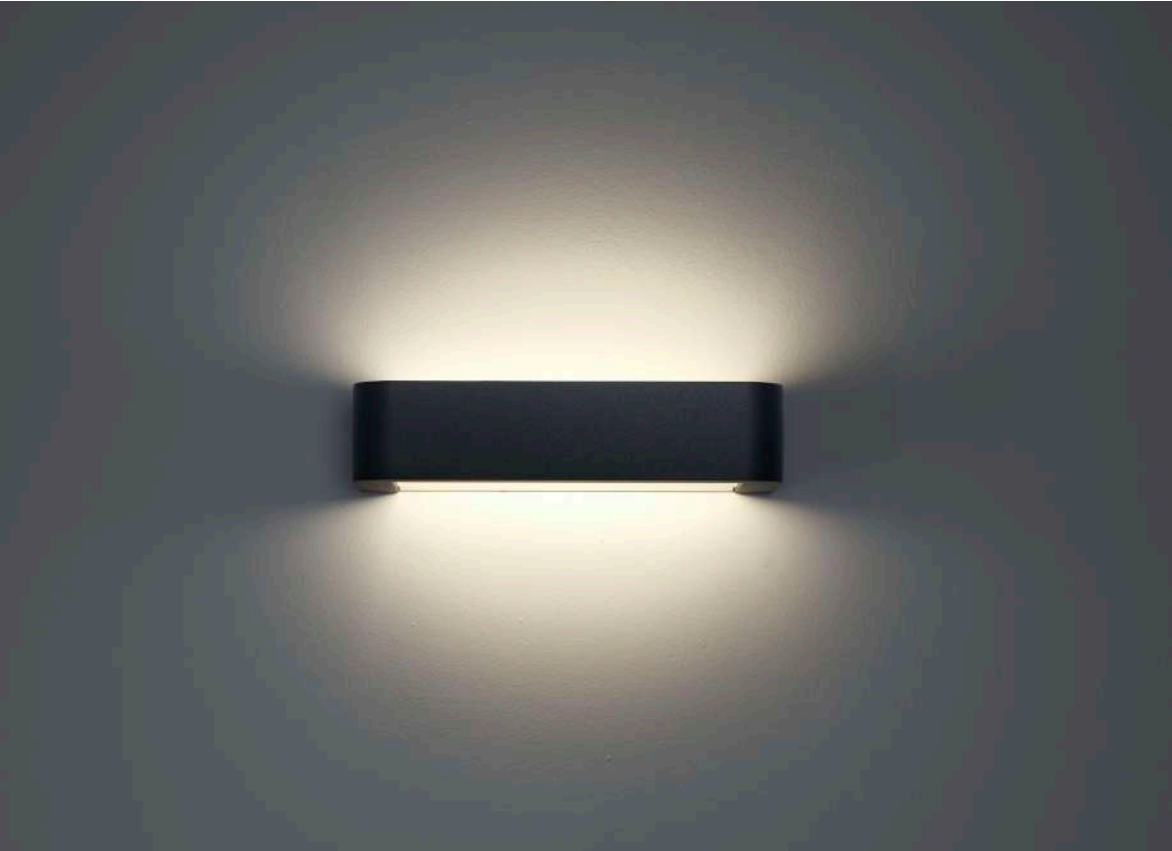



Metoo

wall

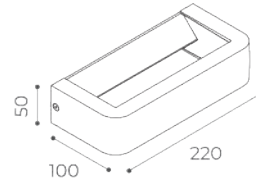

Available finishes:

- white
- sand
- graphite
- aluminium
- corten
- olive green

Light Source
Supply
CRI
IP rating
Electrical Class
Application
Diffuser

mid power led
 220-240V
 ≥80
 IP65
 |
 ceiling, wall
 tempered sandblasted glass


Power 220-240V 10W@230V
Led Colour temp. 2700K / 3000K



		lm	white	sand	graphite	aluminium	corten	green
2700K 10W@230V	220-240V	444	900231042	900231043	900231044	900231045	900231048	900231046
		lm	white	sand	graphite	aluminium	corten	green
3000K 10W@230V	220-240V	468	900211042	900211043	900211044	900211045	900211048	900211046

Metoo

bollard

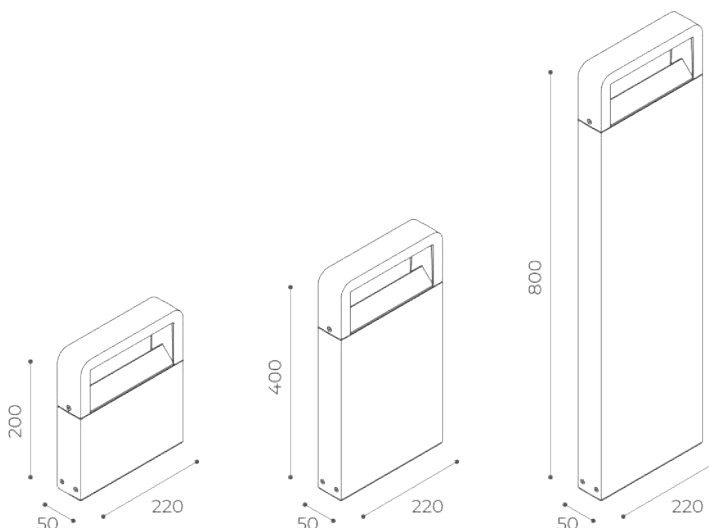


Available finishes:



Light Source mid power led
Supply 220-240V
CRI ≥80
IP rating IP65
Electrical Class I
Application floor /ground
Diffuser sandblasted glass

Power 220-240V 10Wled - 12,6We
Led Colour temp. 2700K / 3000K



H200		lm	white	sand	graphite	aluminium	corten	green
2700K 10Wled 12,6We	220-240V	444	900231012	900231013	900231014	900231015	900231018	900231016
3000K 10Wled 12,6We	220-240V	468	900211012	900211013	900211014	900211015	900211018	900211016
H400		lm	white	sand	graphite	aluminium	corten	green
2700K 10Wled 12,6We	220-240V	444	900231022	900231023	900231024	900231025	900231028	900231026
3000K 10Wled 12,6We	220-240V	468	900211022	900211023	900211024	900211025	900211028	900211026
H800		lm	white	sand	graphite	aluminium	corten	green
2700K 10Wled 12,6We	220-240V	444	900231032	900231033	900231034	900231035	900231038	900231036
3000K 10Wled 12,6We	220-240V	468	900211032	900211033	900211034	900211035	900211038	900211036




ACCESSORIES



Anchor bolts
219x49 (90max) x 175mm

code **9042**



3-4 way - 4 poles terminal block IP68
53x26x82mm

code **9005**

ACCESSORIES:

code **9042 / 9005**





Eloise

DESIGNED TO RAISE EMOTION

Eloise is a wall lighting fixture with 360° radial emission, featuring a clean and comfortable design.

Made of die-cast aluminum with a cathaphoresis treatment and a layer of polyester powder coating, it is resistant to outdoor environments.

Available with a white or black internal reflector, it is ideal for wall or ceiling installation, providing comfortable lighting with the option to choose a dark reflector.

The power supply is integrated, and the LED board is equipped with Mid-power LEDs in 2700K or 3000K.

Eloise è un apparecchio d'illuminazione da parete a emissione radiale 360° dal design pulito e confortevole, in alluminio pressofuso trattamento di cataforesi e strato di vernice di polvere di poliestere resistente agli ambienti esterni.

Disponibile con riflettore interno bianco o nero, è ideale per installazione a parete ma anche a soffitto offrendo un'illuminazione confortevole grazie alla possibilità di scegliere la parabola scura.

L'alimentatore è integrato e la scheda Led equipaggiata con Mid-power led 2700K o 3000K.










Eloise

white and black reflector



Available finishes:

- white
- sand
- graphite
- aluminium
- corten
- olive green **on request*

Light Source	mid power led	Power	220-240V- 10W/led 13We
Supply	220-240V / 24V	Led Colour temp.	2700K/3000K
Dimmer	only 24V (PWM)	Emission	360°
CRI	≥80		
IP rating	IP65		
Electrical Class	II, III		
Application	wall, ceiling		
Diffuser	polycarbonate UV resistant diffuser. White or black internal reflector		
Shape	round		



			lm	white	sand	graphite	aluminium	corten
2700K 10W/led 13We	220-240V	white reflector	856	901431002	901431003	901431004	901431005	901431008
		black reflector	413	901431012	901431013	901431014	901431015	901431018
			lm	white	sand	graphite	aluminium	corten
2700K 10W/led	24V III	white reflector	856	901432002	901432003	901432004	901432005	901432008
		black reflector	413	901432012	901432013	901432014	901432015	901432018
			lm	white	sand	graphite	aluminium	corten
3000K 10W/led 13We	220-240V	white reflector	900	901411002	901411003	901411004	901411005	901411008
		black reflector	437	901411012	901411013	901411014	901411015	901411018
			lm	white	sand	graphite	aluminium	corten
3000K 10W/led	24V III	white reflector	955	901412002	901412003	901412004	901412005	901412008
		black reflector	413	901412012	901412013	901412014	901412015	901412018





Lucignolo

ESSENTIAL LIGHT AND PURE LINES BLEND WITH TIMELESS ALLURE

Elegant fixture for installation on a solid wall or floor surface. With soft light emission, Lucignolo aspires to be not only a functional fixture but also a decorative element, thanks to the range of painted aluminium or steel covers with elegant PVD finishes.

This treatment offer customers the chance to experiment with particularly refined colours such as gold and bronze in glossy or matt finishes.

The structure is made of die-cast aluminium, treated with electrophoresis, and coated with polyester powder. Inox model is the only suitable for floor installation.

Equipped with mid power led in two colours 2700K and 3000K.

Elegante apparecchio per l'installazione su superficie solida a parete o pavimento.


Dall'emissione luminosa morbida, Lucignolo aspira ad essere oltre che un apparecchio di funzione anche un elemento decorativo, grazie alla gamma di cover in alluminio verniciate o in acciaio con eleganti finiture PVD, trattamento che offre la possibilità di osare con colori particolarmente ricercati come l'oro e il bronzo in finitura lucida o opaca.

La struttura è in alluminio pressofuso, trattato con bagno di cataforesi e verniciato con polvere poliestere. Il modello in INOX è l'unico della gamma installabile a pavimento.

Equipaggiato mid power led in due colorazioni 2700K e 3000K.






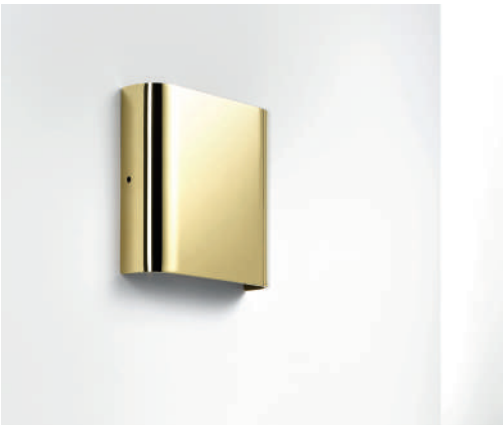



Lucignolo

mono emission



Available finishes:



Light Source mid power led
Supply 24V / 220-240V
Dimmer only 24V (PWM)
CRI ≥80
Electrical Class II, III
IP rating 65
Application wall
Diffuser polycarbonate diffuser

Power 24V 3Wled
 220-240V 3Wled - 4,7We
Led Colour temp. 2700K/3000K



2700K 24V III lm 294
 3Wled

white	sand	graphite	aluminium	corten	gold	gold matt	bronze	bronze matt
902232002	902232003	902232004	902232005	902232008	9022320012	9022320013	9022320014	9022320015

3000K 24V III lm 303
 3Wled

white	sand	graphite	aluminium	corten	gold	gold matt	bronze	bronze matt
902212002	902212003	902212004	902212005	902212008	9022120012	9022120013	9022120014	9022120015

2700K 220-240V II lm 294
 3Wled / 4,7 We


white	sand	graphite	aluminium	corten	gold	gold matt	bronze	bronze matt
902231002	902231003	902231004	902231005	902231008	9022310012	9022310013	9022310014	9022310015

3000K 220-240V II lm 303
 3Wled / 4,7 We

white	sand	graphite	aluminium	corten	gold	gold matt	bronze	bronze matt
902211002	902211003	902211004	902211005	902211008	9022110012	9022110013	9022110014	9022110015

Lucignolo

double emission

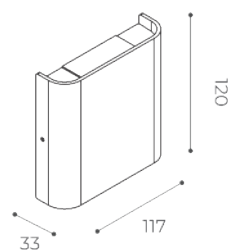

Available finishes:



Light Source mid power led
Supply 24V / 220-240V
Dimmer only 24V (PWM)
CRI ≥80
Electrical Class II, III
IP rating 65
Application wall
Diffuser polycarbonate diffuser

Power 24V 2x3Wled
 220-240V 2x3Wled - 8We
Led Colour temp. 2700K/3000K



2700K 24V III lm 588
 2x3Wled

white	sand	graphite	aluminium	corten	gold	gold matt	bronze	bronze matt
902232012	902232013	902232014	902232015	902232018	9022320112	9022320113	9022320114	9022320115

3000K 24V III lm 606
 2x3Wled

white	sand	graphite	aluminium	corten	gold	gold matt	bronze	bronze matt
902212012	902212013	902212014	902212015	902212018	9022120112	9022120113	9022120114	9022120115

2700K 220-240V II lm 588
 2x3Wled / 8 We


white	sand	graphite	aluminium	corten	gold	gold matt	bronze	bronze matt
902231012	902231013	902231014	902231015	902231018	9022310112	9022310113	9022310114	9022310115

3000K 220-240V II lm 606
 2x3Wled / 8 We

white	sand	graphite	aluminium	corten	gold	gold matt	bronze	bronze matt
902211012	902211013	902211014	902211015	902211018	9022110112	9022110113	9022110114	9022110115

Lucignolo Inox

mono emission



Available finishes:



inox

Light Source mid power led
Supply 24V / 220-240V
Dimmer only 24V (PWM)
CRI ≥80
Electrical Class II, III
IP rating 67
Application floor
Diffuser polycarbonate diffuser


Power 24V 3Wled
 220-240V 3Wled - 4,7We
Led Colour temp. 2700K/3000K




			lm		inox
2700K 3 Wled	24V	III	294	Mono emission	902232001
3000K 3 Wled	24V	III	303	Mono emission	902212001
2700K 4,7 We	220-240V	II	294	Mono emission	902231001
3000K 4,7 We	220-240V	II	303	Mono emission	902211001

Lucignolo Inox

double emission

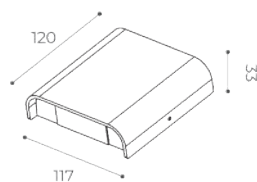

Available finishes:



inox

Light Source mid power led
Supply 24V / 220-240V
Dimmer only 24V (PWM)
CRI ≥80
Electrical Class II, III
IP rating 67
Application floor
Diffuser polycarbonate diffuser


Power 24V 2x3Wled
 220-240V 2x3Wled - 8We
Led Colour temp. 2700K/3000K



			lm		inox
2700K 2x3 Wled	24V	III	588	Double emission	902232011
			lm		inox
3000K 2x3 Wled	24V	III	656	Double emission	902212011
			lm		inox
2700K 8 We	220-240V	II	588	Double emission	902231011
			lm		inox
3000K 8 We	220-240V	II	656	Double emission	902211011




ACCESSORIES




Recessed box
83,5x108x73mm

code **9019**




Power supply 16W 110-240V IP65
125x61x31mm

code **9059**



Power supply 24V DC 70W IP67
267x79x52mm

code **9049**



Power supply 24V DC 150W IP67
267x79x52mm

code **9057**

ACCESSORIES:

code **9019 / 9059 / 9049 / 9057**



Talon

LIGHT THE BOND BETWEEN SPACE AND INDIVIDUAL

Talon is a compact wall-mounted lighting fixture, available in single or dual emission and in two different sizes.

Made of die-cast and extruded aluminum with cataphoresis treatment and a layer of polyester powder coating, it is resistant to outdoor environments.

The tempered and silk-screened glass diffusers are bonded using a robotic system to ensure IP protection.

It features recessed optics and is equipped with a low-luminance screen to minimize glare.

The Power LED model comes with a transparent, silk-screened tempered glass diffuser, while the Mid-power LED model is provided with sandblasted glass to ensure uniform light emission.

In the 'recessed' version, the front frame is made of white-painted stainless steel, and installation is carried out using stainless steel springs for false ceilings, or alternatively with a casing for solid walls.

Talon è un apparecchio per installazione a parete compatto, disponibile con mono o bi-emissione in due diverse misure.



In alluminio pressofuso ed estruso trattamento di cataforesi e strato di vernice di polvere di poliestere resistente agli ambienti esterni, i diffusori in vetro temprato e serigrafato sono incollati tramite sistema robotico a garanzia della tenuta IP.

Caratterizzato da ottica arretrata e dotato di schermo a bassa luminanza per ridurre al massimo l'abbagliamento.

Per il modello con Power Led il diffusore è in vetro serigrafato trasparente temprato, mentre il modello Mid-power Led viene fornito con vetri sabbiati per garantire un'emissione luminosa omogenea.


Nella versione "recessed" la ghiera frontale è realizzata in acciaio INOX verniciato bianco, l'installazione avviene mediante delle molle in acciaio inox per i controsoffitti o in alternativa con casafirma per il muro pieno.



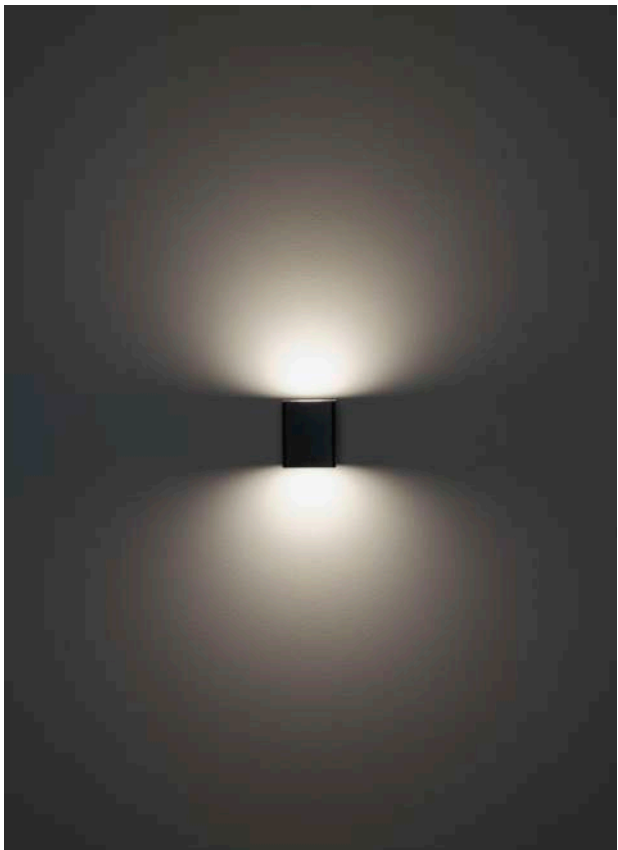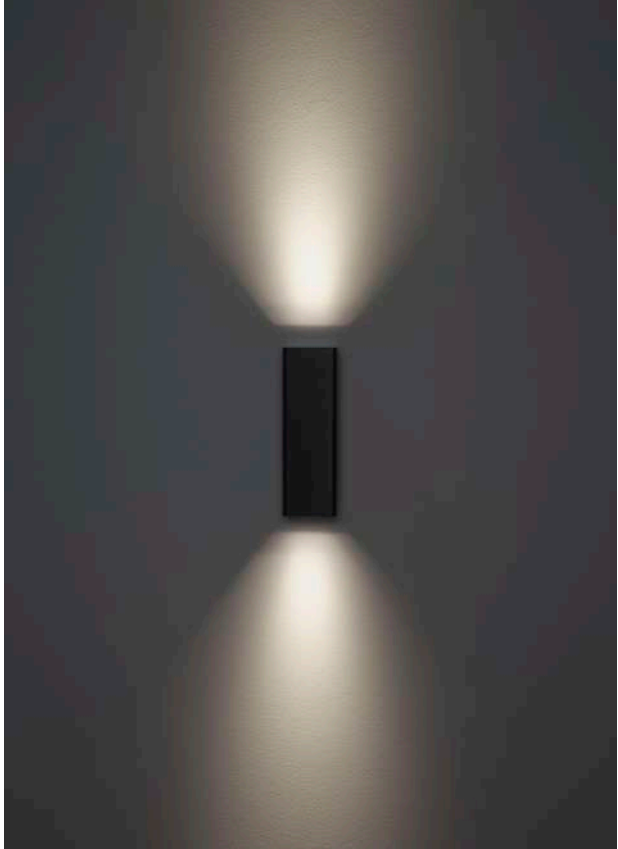

Talon Wall

monoemission




Available finishes:



Light Source power led / mid power led
Supply 220-240V
Dimmer upon request
CRI ≥80
IP rating IP65
Electrical Class I
Application wall
Diffuser transparent glass / sandblasted

Power 220-240V 8,2Wled 10,7We
 4,8Wled 5,8We
Led Colour temp. 2700K / 3000K



			lm	white	sand	graphite	aluminium	corten	green
2700K 8,2Wled 10,7 We	220-240V	19°	756	901131032	901131033	901131034	901131035	901131038	9011310316
		32°	760	901131042	901131043	901131044	901131045	901131048	9011310416
		65°	722	901131052	901131053	901131054	901131055	901131058	9011310516


2700K 4,8 Wled 5,8 We	220-240V	diffused	481	901131102	901131103	901131104	901131105	901131108	9011311016
-----------------------------	----------	----------	-----	-----------	-----------	-----------	-----------	-----------	------------

			lm	white	sand	graphite	aluminium	corten	green
3000K 8,2Wled 10,7 We	220-240V	19°	796	901111032	901111033	901111034	901111035	901111038	9011110316
		32°	800	901111042	901111043	901111044	901111045	901111048	9011110416
		65°	760	901111052	901111053	901111054	901111055	901111058	9011110516

3000K 4,8 Wled 5,8 We	220-240V	diffused	506	901111102	901111103	901111104	901111105	901111108	9011111016
-----------------------------	----------	----------	-----	-----------	-----------	-----------	-----------	-----------	------------

Talon Wall

biemission

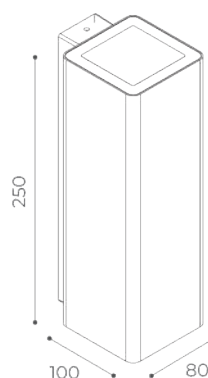







Available finishes:

-  white
-  sand
-  graphite
-  aluminium
-  corten
-  olive green

Light Source power led
Supply 220-240 V
Dimmer upon request
CRI ≥80
IP rating IP65
Electrical Class I
Application wall
Diffuser transparent glass


Power 220-240V 2x8,2Wled 21,4We
Led Colour temp. 2700K / 3000K



			lm	white	sand	graphite	aluminium	corten	green
2700K 2x8,2Wled 2x10,7 We	220-240V	19° 	2x756	901131002	901131003	901131004	901131005	901131008	9011310016
		32° 	2x760	901131012	901131013	901131014	901131015	901131018	9011310116
		65° 	2x722	901131022	901131023	901131024	901131025	901131028	9011310216
			lm	white	sand	graphite	aluminium	corten	green
3000K 2x8,2Wled 2x10,7 We	220-240V	19° 	2x796	901111002	901111003	901111004	901111005	901111008	9011110016
		32° 	2x800	901111012	901111013	901111014	901111015	901111018	9011110116
		65° 	2x760	901111022	901111023	901111024	901111025	901111028	9011110216

Talon Wall

biemission h100





Available finishes:




Light Source mid power led
Supply 220-240V
Dimmer upon request
CRI ≥80
IP rating IP65
Electrical Class I
Application wall
Diffuser transparent glass
Shape rectangular

Power 220-240V 2x4,8Wled 11,6We
Led Colour temp. 2700K / 3000K



			lm	white	sand	graphite	aluminium	corten	green
2700K	220-240V	diffused 	2x481	901131112	901131113	901131114	901131115	901131118	901131116
2x4,8 Wled 2x5,8 We									
			lm	white	sand	graphite	aluminium	corten	green
3000K	220-240V	diffused 	2x506	901111112	901111113	901111114	901111115	901111118	901111116
2x4,8 Wled 2x5,8 We									

Talon Roof



Available finishes:



Light Source power led / mid power led
Supply 220-240V
Dimmer upon request
CRI ≥80
IP rating IP65
Electrical Class I
Application roof
Diffuser transparent glass / sandblasted

Power 220-240V 8,2Wled 10,7
 4,8Wled 5,8We
Led Colour temp. 2700K / 3000K




				lm	white	sand	graphite	aluminium	corten	green
2700K 8,2Wled 10,7 We	220-240V	19°	▲	756	901131122	901131123	901131124	901131125	901131128	9011311216
		32°	▲	760	901131132	901131133	901131134	901131135	901131138	9011311316
		65°	▲	722	901131142	901131143	901131144	901131145	901131148	9011311416

2700K 4,8 Wled 5,8 We	220-240V	diffused	☺	481	901131152	901131153	901131154	901131155	901131158	9011311516
-----------------------------	----------	----------	---	-----	-----------	-----------	-----------	-----------	-----------	------------

				lm	white	sand	graphite	aluminium	corten	green
3000K 8,2Wled 10,7 We	220-240V	19°	▲	796	901111122	901111123	901111124	901111125	901111128	9011111216
		32°	▲	800	901111132	901111133	901111134	901111135	901111138	9011111316
		65°	▲	760	901111142	901111143	901111144	901111145	901111148	9011111416

3000K 4,8 Wled 5,8 We	220-240V	diffused	☺	506	901111152	901111153	901111154	901111155	901111158	9011111516
-----------------------------	----------	----------	---	-----	-----------	-----------	-----------	-----------	-----------	------------

Talon Recessed



Available finishes:



Light Source power led / mid power led
Supply 220-240V
Dimmer upon request
CRI ≥80
IP rating IP65
Electrical Class II
Application ceiling
Diffuser transparent glass / sandblasted

Power 220-240V 8,2Wled 10,7
 4,8Wled 5,8We
Led Colour temp. 2700K / 3000K




				lm	white
2700K	220- 240V	19°	▲	756	901131162
8,2 Wled		32°	▲	760	901131172
10,7 We		65°	▲	722	901131182

2700K	220- 240V	diffused	☺	481	901131192
4,8 Wled					
5,8 We					

				lm	white
3000K	220- 240V	19°	▲	796	901111162
8,2 Wled		32°	▲	800	901111172
10,7 We		65°	▲	760	901111182

3000K	220- 240V	diffused	☺	506	901111192
4,8 Wled					
5,8 We					

ACCESSORIES



Metal box for concrete installation
262x265x125mm

code **9078**



ACCESSORIES:

code **9078**



Divar

ILLUMIANTING MEANS GIVING PLACE

Divar is a compact wall-mounted lighting fixture, available in single or dual emission and in two different sizes.

Made of die-cast and extruded aluminum with cathodolysis treatment and a layer of polyester powder coating, it is resistant to outdoor environments.

The tempered and silk-screened glass diffusers are bonded using a robotic system to ensure IP protection.

It features recessed optics and is equipped with a low-luminance screen to minimize glare.

The Power LED model comes with a transparent, silk-screened tempered glass diffuser, while the Mid-power LED model is provided with sandblasted glass to ensure uniform light emission.

In the 'recessed' version, the front frame is made of white-painted stainless steel, and installation is carried out using stainless steel springs for false ceilings, or alternatively with a casing for solid walls.

Divar è un apparecchio per installazione a parete compatto, disponibile in mono o bi-emissione in due diverse misure.

In alluminio pressofuso ed estruso trattamento di cataforesi e strato di vernice di polvere di poliestere resistente agli ambienti esterni, i diffusori in vetro temprato e serigrafato sono incollati tramite sistema robotico a garanzia della tenuta IP.

Caratterizzato da ottica arretrata e dotato di schermo a bassa luminanza per ridurre al massimo l'abbagliamento.



Per il modello con Power Led il diffusore è in vetro serigrafato trasparente temprato, mentre il modello con Mid-power Led viene fornito con vetri sabbiati per garantire un'emissione luminosa omogenea.

Nella versione "recessed" la ghiera frontale è realizzata in acciaio INOX verniciato bianco, l'installazione avviene mediante delle molle in acciaio inox per i controsoffitti o in alternativa con casafirma per il muro pieno








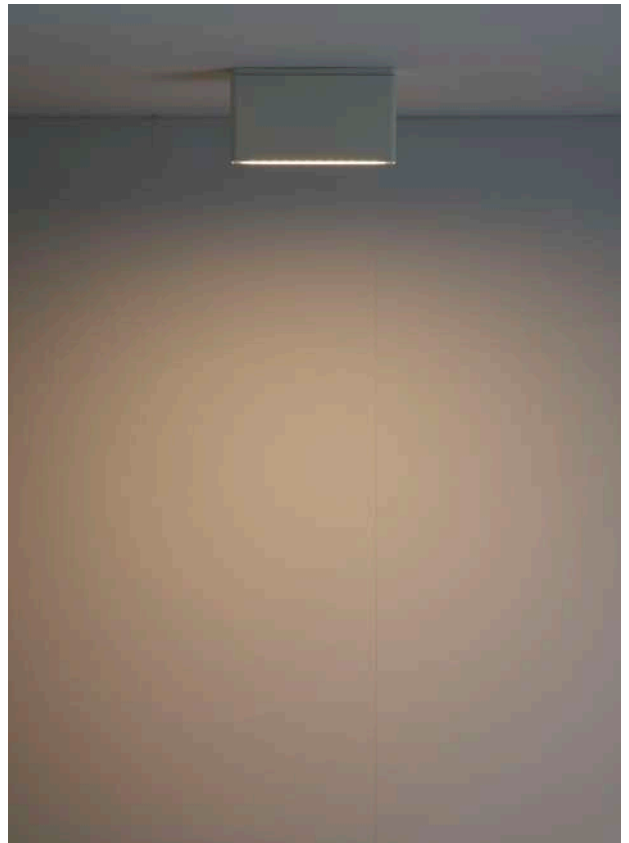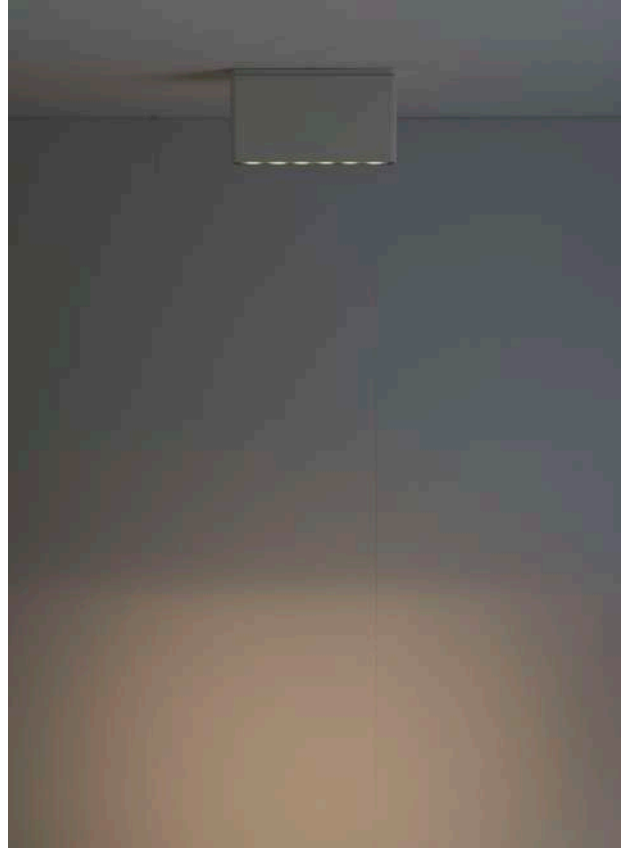

Divar

wall monoemission




Available finishes:



Light Source power led / mid power led
Supply 220-240V
Dimmer upon request
CRI ≥80
IP rating IP65
Electrical Class I
Application wall
Diffuser transparent glass
 sanblasted glass

Power 220-240V 12,1Wled 15,4We
 5,7Wled, 7,2 We
Led Colour temp. 2700K / 3000K



			lm	white	sand	graphite	aluminium	corten	green
2700K 12,1Wled 15,4 We	220-240V	19°	1095	901032012	901032013	901032014	901032015	901032018	901032016
		32°	1118	901031122	901031123	901031124	901031125	901031128	901031126
		65°	1080	901031132	901031133	901031134	901031135	901031138	901031136


2700K 5,7 Wled 7,2 We	220-240V	diffused	501	901031022	901031023	901031024	901031025	901031028	901031026
-----------------------------	----------	----------	-----	-----------	-----------	-----------	-----------	-----------	-----------

			lm	white	sand	graphite	aluminium	corten	green
3000K 12,1Wled 15,4 We	220-240V	19°	1153	901011012	901011013	901011014	901011015	901011018	901011016
		32°	1177	901011122	901011123	901011124	901011125	901011128	901011126
		65°	1137	901011132	901011133	901011134	901011135	901011138	901011136

3000K 5,7 Wled 7,2 We	220-240V	diffused	527	901011022	901011023	901011024	901011025	901011028	901011026
-----------------------------	----------	----------	-----	-----------	-----------	-----------	-----------	-----------	-----------

Divar

wall double emission



Available finishes:



Light Source power led
Supply 220-240V
Dimmer upon request
CRI ≥80
IP rating IP65
Electrical Class I
Application wall
Diffuser transparent glass


Power 220-240V 2x12,1Wled 29,7We
Led Colour temp. 2700K / 3000K



				lm	white	sand	graphite	aluminium	corten	green
2700K 2x12,1Wled 2x15,4 We	220-240V	19°	▲	2x1095	901031002	901031003	901031004	901031005	901031008	9010310016
		32°	▲	2x1118	901031102	901031103	901031104	901031105	901031108	9010311016
		65°	▲	2x1080	901031112	901031113	901031114	901031115	901031118	9010311116
3000K 2x12,1Wled 2x15,4 We	220-240V	19°	▲	2x1153	901011002	901011003	901011004	901011005	901011008	9010110016
		32°	▲	2x1177	901011102	901011103	901011104	901011105	901011108	9010111016
		65°	▲	2x1137	901011112	901011113	901011114	901011115	901011118	9010111116

Divar

wall double emission h100





Available finishes:

-  white
-  sand
-  graphite
-  aluminium
-  corten
-  olive green


Light Source mid power led
Supply 220-240V
Dimmer upon request
CRI ≥80
IP rating IP65
Electrical Class I
Application wall
Diffuser sandblasted

Power 220-240V 2x5,7W led 14,4We
Led Colour temp. 2700K / 3000K



			lm	white	sand	graphite	aluminium	corten	green
2700K	220-240V	diffused	 2x501	901031032	901031033	901031034	901031035	901031038	9010310316
2x5,7 W led 2x7,2 We									
3000K	220-240V	diffused	 2x527	901011032	901011033	901011034	901011035	901011038	9010110316
2x5,7 W led 2x7,2 We									

Divar Roof






Available finishes:

-  white
-  sand
-  graphite
-  aluminium
-  corten
-  olive green




Light Source power led / mid power led
Supply 220-240V
Dimmer upon request
CRI ≥80
IP rating IP65
Electrical Class I
Application roof
Diffuser transparent glass / sandblasted


Power 220-240V 12,1Wled 15,4We
 5,7Wled 7,2 We
Led Colour temp. 2700K / 3000K




				lm	white	sand	graphite	aluminium	corten	green
2700K 12,1Wled 15,4 We	220-240V	19°		1095	901031042	901031043	901031044	901031045	901031048	901031046
		32°		1118	901031062	901031063	901031064	901031065	901031068	901031066
		65°		1080	901031072	901031073	901031074	901031075	901031078	901031076

2700K 5,7 Wled 7,2 We	220-240V	diffused		501	901031052	901031053	901031054	901031055	901031058	901031056
-----------------------------	----------	----------	---	-----	-----------	-----------	-----------	-----------	-----------	-----------

				lm	white	sand	graphite	aluminium	corten
3000K 12,1Wled 15,4 We	220-240V	19°		1153	901011042	901011043	901011044	901011045	901011048
		32°		1177	901011062	901011063	901011064	901011065	901011068
		65°		1137	901011072	901011073	901011074	901011075	901011078

3000K 5,7 Wled 7,2 We	220-240V	diffused		527	901011052	901011053	901011054	901011055	901011058	901011056
-----------------------------	----------	----------	---	-----	-----------	-----------	-----------	-----------	-----------	-----------

Divar Recessed



Available finishes:



white

Light Source
Supply
Dimmer
CRI
IP rating
Electrical Class
Application
Diffuser

power led / mid power led
 220-240V
 upon request
 ≥80
 IP65
 II
 ceiling
 transparent glass / sandblasted

Power

220-240V 12,1Wled 15,4We
 5,7Wled 7,2 We
 2700K / 3000K

Led Colour temp.




		lm		white
2700K 12,1Wled 15,4 We	220-240V	19° ▲	1095	901031142
		32° ▲	1118	901031152
		65° ▲	1080	901031162

2700K 5,7 Wled 7,2 We	220-240V	diffused ◐	501	901031172
-----------------------------	----------	------------	-----	-----------

		lm		white
3000K 12,1Wled 15,4 We	220-240V	19° ▲	1153	901011142
		32° ▲	1177	901011152
		65° ▲	1137	901011162

3000K 5,7 Wled 7,2 We	220-240V	diffused ◐	527	901011172
-----------------------------	----------	------------	-----	-----------

ACCESSORIES



Metal box for concrete installation
385x162x125mm

code **9079**



ACCESSORIES:

code **9079**



7

Root

LIGHT REVEALS NATURE AS A WONDERFUL ARCHITECTURE

It is a linear fixture for wall installation, featuring an unusual and minimal design. Made of extruded aluminium with cathodolysis treatment and a layer of polyester powder paint resistant to outdoor environments.

It is characterized by being directional, thanks to a joint placed on a pivot between the body and the base, allowing for rotation.

Equipped with mid-power LED in 2800/3150K colour temperature, attached to the body with two-component resin to ensure its IP protection.

Available for installation on both sides (right and left), in low voltage, and in the IP20 version with an integrated power supply.


Root è un apparecchio lineare per installazione a parete, dal design insolito e minimale. Realizzato in estruso di alluminio e trattamento di catodolisi e strato di vernice di polvere di poliestere resistente agli ambienti esterni.

Ha la caratteristica di essere direzionale grazie allo snodo posto su di un perno fra corpo e base che ne consente la rotazione.

Equipaggiato mid-power led colorazione 2800/3150K, fissata al corpo con resina bicomponente a garantirne la tenuta IP.

Disponibile per installazione su entrambi i lati (Dx e Sx) in bassa tensione e nella versione IP20 con alimentatore a bordo.


Design by Rocco ESTE

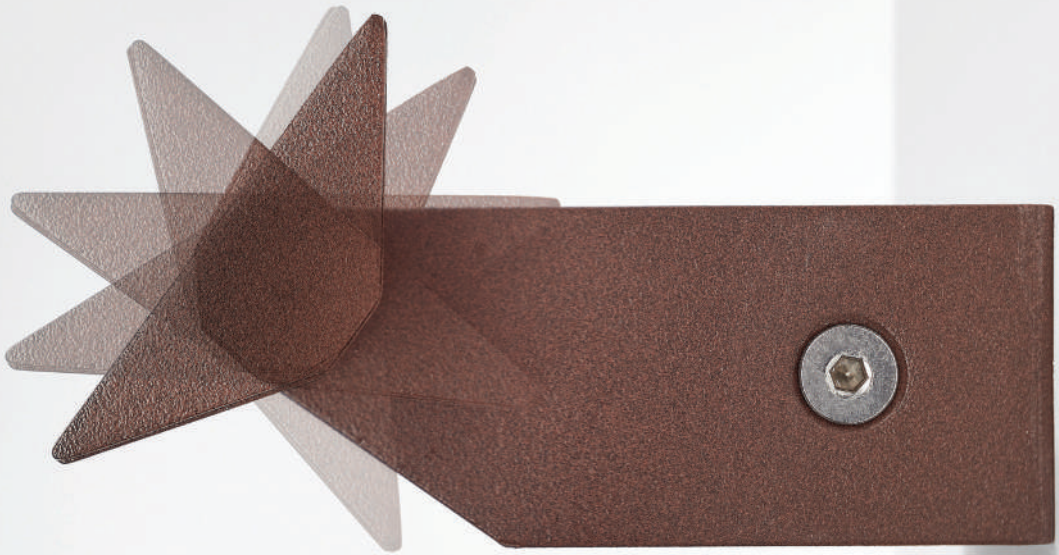



Root Outdoor

dx

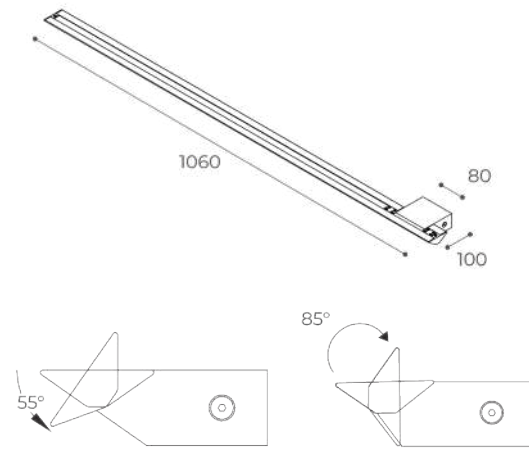

Available finishes:



Light Source
Supply
Dimmer
CRI
IP rating
Electrical Class
Application
Diffuser
Shape

mid power led
 24V
 PWM
 ≥80
 IP65
 III
 wall, roof
 opal resin
 rectangular

Power 24V - 12W
Led Colour temp. 2800K / 3150K



indirect lighting only


		lm	white	sand	graphite	aluminium	corten	green
2800K 12W	24V	783	901631002	901631003	901631004	901631005	901631008	9016310016
3150K 12W	24V	824	901611002	901611003	901611004	901611005	901611008	9016110016

The light colour of this fixture may shift by approximately ±150K due to the protective resin covering the leds.

La tonalità di colore è soggetta ad una variazione di ±150K dovuta all'applicazione di resina protettiva sui led.

Root Outdoor

SX

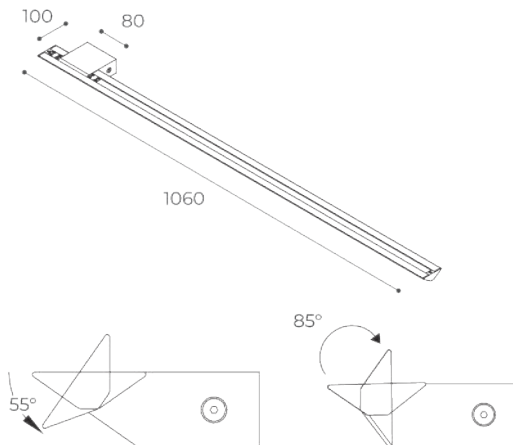

Available finishes:



Light Source
Supply
Dimmer
CRI
IP rating
Electrical Class
Application
Diffuser
Shape

mid power led
 24V
 PWM
 ≥80
 IP65
 III
 wall, roof
 opal resin
 rectangular

Power 24V - 12W
Led Colour temp. 2800K / 3150K



indirect lighting only


		lm	white	sand	graphite	aluminium	corten	green
2800K	24V	783	901631012	901631013	901631014	901631015	901631018	901631016
12W								
		lm	white	sand	graphite	aluminium	corten	green
3150K	24V	824	901611012	901611013	901611014	901611015	901611018	901611016
12W								

The light colour of this fixture may shift by approximately ±150K due to the protective resin covering the leds.

La tonalità di colore è soggetta ad una variazione di ±150K dovuta all'applicazione di resina protettiva sui led.

Root Indoor

dx

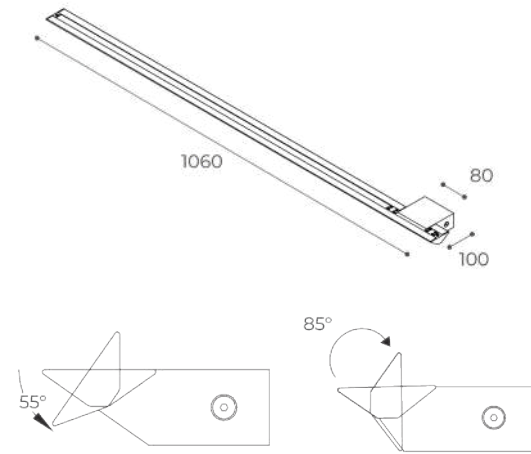

Available finishes:



Light Source
Supply
CRI
IP rating
Electrical Class
Application
Diffuser
Shape

mid power led
 220-240V
 ≥80
 IP20
 II
 wall, roof
 opal resin
 rectangular

Power 220-240V - 8,1Wled - 10,2We
Led Colour temp. 2800K / 3150K



indirect lighting only


		lm	white	sand	graphite	aluminium	corten	green
2800K 8,1Wled 10,2We	220-240V	548	901631022	901631023	901631024	901631025	901631028	9016310216
		lm	white	sand	graphite	aluminium	corten	green
3150K 8,1Wled 10,2We	220-240V	577	901611022	901611023	901611024	901611025	901611028	9016110216

The light colour of this fixture may shift by approximately ±150K due to the protective resin covering the leds.

La tonalità di colore è soggetta ad una variazione di ±150K dovuta all'applicazione di resina protettiva sui led.

Root Indoor

SX

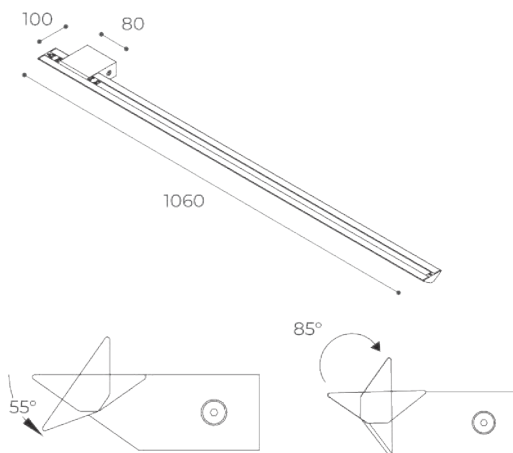

Available finishes:



Light Source
Supply
CRI
IP rating
Electrical Class
Application
Diffuser
Shape

mid power led
 220-240V
 ≥80
 IP20
 II
 wall, roof
 opal resin
 rectangular

Power 220-240V - 8,1Wled - 10,2We
Led Colour temp. 2800K / 3150K



indirect lighting only


		lm	white	sand	graphite	aluminium	corten	green
2800K 8,1Wled 10,2We	220-240V	548	901631032	901631033	901631034	901631035	901631038	9016310316
		lm	white	sand	graphite	aluminium	corten	green
3150K 8,1Wled 10,2We	220-240V	577	901611032	901611033	901611034	901611035	901611038	9016110316

The light colour of this fixture may shift by approximately ±150K due to the protective resin covering the leds.

La tonalità di colore è soggetta ad una variazione di ±150K dovuta all'applicazione di resina protettiva sui led.




ACCESSORIES




Power supply 24V 16Watt IP20
118x52x26mm

code **9006**




Power supply 24V DC 70W IP67
267x79x52mm

code **9049**




Power supply 24V 20Watt IP20
103x67x21mm

code **9007**




Power supply 24V DC 150W IP67
267x79x52mm

code **9057**




Power supply 24V 50Watt IP20
190x60x36mm

code **9008**



SPD CL.1 12KV 320V UC max
40x57x20mm

code **9058**



Power supply 16W 110-240V IP65
125x61x31mm

code **9059**

ACCESSORIES:

code **9006 / 9007 / 9008 / 9059 / 9049 / 9057 / 9058**



Aria

THE SIMPLICITY OF TRADITION

Aria is a surface mounted made of die-cast aluminum with cathaphoresis treatment and a layer of polyester powder coating, resistant to outdoor environments, suitable for wall or ceiling installation.

It features an ultra-diffusing screen that, combined with the Edge-LED arrangement of the Mid-power LEDs, ensures high luminous efficiency.


Its minimal lines and extremely compact dimensions make it a highly adaptable product, also thanks to its elegant appearance

Aria è una plafoniera realizzata in alluminio pressofuso e trattamento di cataforesi con strato di vernice di polvere di poliestere resistente agli ambienti esterni, adatta all'installazione a parete o soffitto.

È dotata di uno schermo ultra diffondente che unito alla disposizione Edge-led dei Mid-power Led garantisce grande efficienza luminosa.

Le linee minimali e le dimensioni assolutamente compatte la rendono un prodotto certamente di facilissima adattabilità, grazie anche ad un aspetto elegante.

Aria

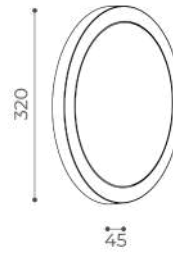

Available finishes:

-  white
-  sand
-  graphite
-  aluminium
-  corten
-  olive green

Light Source mid power led
Supply 220-240V
Dimmer phase cut
CRI ≥80
IP rating 65
Electrical Class II
Application wall/ceiling
Diffuser polycarbonate

Power 220-240V 12Wled - 16We
Led Colour temp. 2700K/3000K



		lm	white	sand	graphite	aluminium	corten	green
2700K 12Wled 16We	220-240V	1461	900737002	900737003	900737004	900737005	900737008	9007370016
		lm	white	sand	graphite	aluminium	corten	green
3000K 12Wled 16We	220-240V	1538	900717002	900717003	900717004	900717005	900717008	9007170016





Zero

LOOKING FOR A LIGHT THAT GUIDES US

Family of recessed ground lights, made of turned and anodized aluminum in a natural finish, available in four sizes: Ø45mm, Ø65mm, Ø85mm, and Ø110mm.

All models come with a transparent tempered and silk-screened glass, fixed with silicone robotic system and are available with or without a honeycomb grid.

The Ø45mm and Ø65mm versions are equipped with Power-LED boards (2700K and 3000K), while the Ø85mm model is equipped with a Mid-power LED board (3000K).

The Zero Dome model features a body made of stainless steel (AISI 316L) and a frosted polycarbonate diffuser, offering either 360° or 180° radial light emission, fully resin-coated internally to ensure its IP protection.

The Zero Ø110mm model is equipped with a COB LED with a lens, mounted on a rotating mechanical system for adjusting the light beam.

This system is directly accessible to the installer, allowing the beam to be directed during installation.


Famiglia di incassi a pavimento, in alluminio tornito ed anodizzato in finitura naturale e quattro misure disponibili Ø45mm, Ø65mm, Ø85mm; Ø110mm.

Tutti i modelli sono completi di vetro trasparente temprato e serigrafato, fissato con colla siliconica, disponibile nelle versioni con honeycomb o senza.

Le due versioni Ø45mm, Ø65mm sono equipaggiate da schede Power-led (2700K e 3000K), mentre il modello Ø85mm da scheda Mid-power Led (3000K).

Il modello Zero Dome è caratterizzato da corpo in acciaio Inox (AISI 316L) e un diffusore in polycarbonato satinato, emissione radiale a 360° o 180°, totalmente resinato internamente per garantirne la tenuta

Il modello Zero Ø110mm è equipaggiato da un COB led con lente e fissato su sistema meccanico girevole per l'orientamento del fascio luminoso; il sistema è direttamente accessibile dall'installatore che potrà settare il prodotto direttamente in fase di installazione indirizzando il fascio.

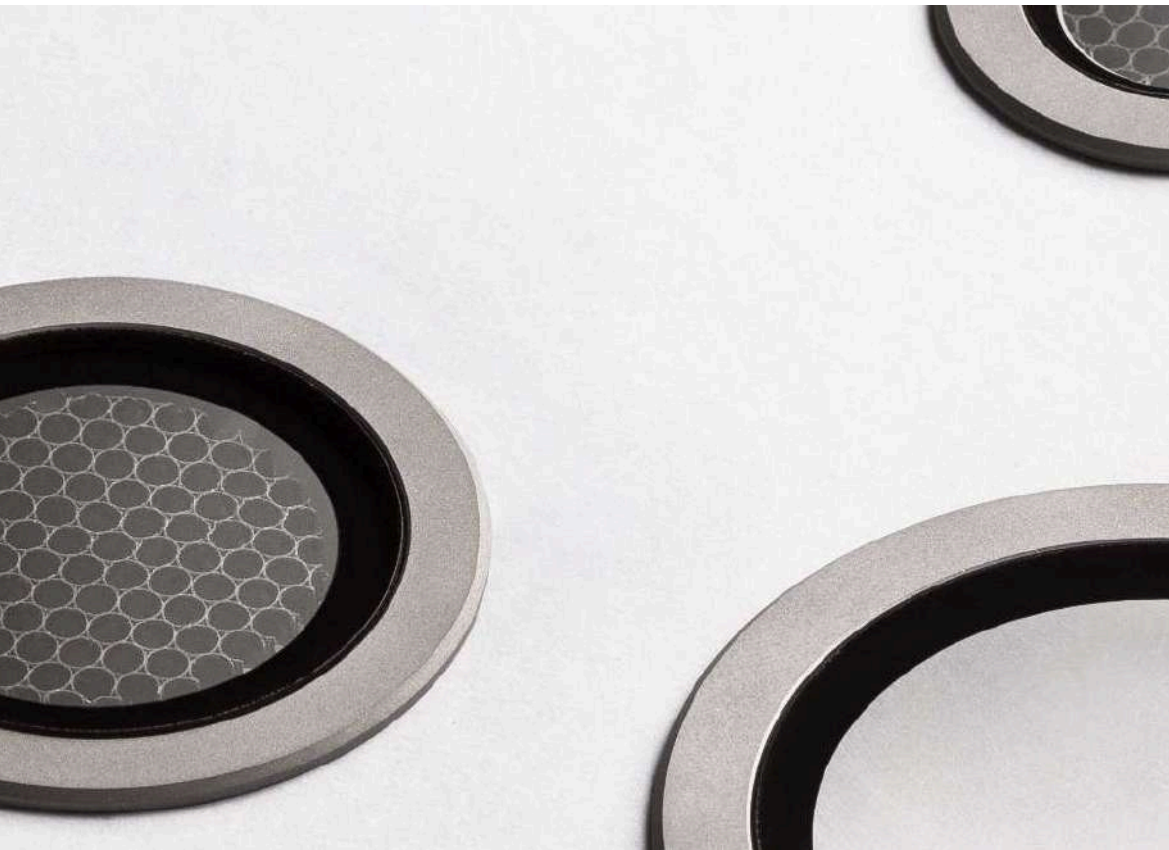

ZERO 110



position 0




position 8°



position 15°



Zero 45




Available finishes:

 aluminium


Light Source power led
Supply 24V
Dimmer PWM
CRI ≥80
IP rating IP67
Electrical Class III
Application ground recessed
Diffuser tempered glass transparent

Power 24V 2Wled - 3We
Led Colour temp. 2700K / 3000K



				lm	aluminium	
2700K 2Wled 3 We	24V	18°	▲	with honeycomb	98	900132136
		18°	▲	without honeycomb	169	900132146
		36°	▲	with honeycomb	75	900132026
		36°	▲	without honeycomb	224	900132036
3000K 2Wled 3 We	24V	18°	▲	with honeycomb	103	900112136
		18°	▲	without honeycomb	175	900112146
		36°	▲	with honeycomb	79	900112026
		36°	▲	without honeycomb	236	900112036

Zero 65



Available finishes:



Light Source power led
Supply 24V
Dimmer PWM
CRI ≥80
IP rating IP67
Electrical Class III
Application ground recessed
Diffuser tempered glass transparent


Power 24V 5,8Wled - 6,3We
Led Colour temp. 2700K / 3000K



				lm	aluminium
2700K 24V 5,8Wled 6,3We	10° ▲	with honeycomb	243	900132196	
	10° ▲	without honeycomb	405	900132206	
	26° ▲	with honeycomb	251	900132156	
	26° ▲	without honeycomb	432	900132126	
	52° ▲	with honeycomb	135	900132066	
	52° ▲	without honeycomb	409	900132076	

				lm	aluminium
3000K 24V 5,8Wled 6,3We	10° ▲	with honeycomb	253	900112196	
	10° ▲	without honeycomb	422	900112206	
	26° ▲	with honeycomb	264	900112156	
	26° ▲	without honeycomb	455	900112126	
	52° ▲	with honeycomb	142	900112066	
	52° ▲	without honeycomb	431	900112076	

Zero 85





Available finishes:

 aluminium


Light Source power led
Supply 24V
Dimmer PWM
CRI ≥80
IP rating IP67
Electrical Class III
Application ground recessed
Diffuser tempered sandblasted glass

Power 24V 5,5Wled
Led Colour temp. 3000K



					lm	aluminium
3000K	24V	diffused		with honeycomb	131	900112086
5,5Wled		diffused		without honeycomb	451	900112166

Zero 110



Available finishes:




Light Source cob led
Supply 24V
Dimmer PWM
CRI ≥80
IP rating IP67
Electrical Class III
Application ground recessed
Diffuser tempered sandblasted glass

Power 24V 12Wled
Led Colour temp. 2700K / 3000K



				lm	aluminium
2700K 12Wled	24V	15°	▲	1088	900132016
		36°	▲	1081	900132106
		60°	▲	1019	900132116
3000K 12Wled	24V	15°	▲	1146	900112016
		36°	▲	1143	900112106
		60°	▲	1073	900112116

Zero Dome

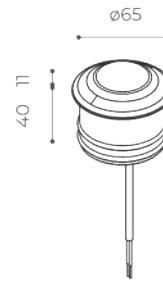

Available finishes:



inox

Light Source mid power led
Supply 24V
Dimmer PWM
CRI ≥80
IP rating IP67
Electrical Class III
Application ground / wall recessed
Diffuser printed polycarbonate diffuser

Power 24V 1Wled / 2Wled
Led Colour temp. 2700K / 3000K



			lm	inox
2700K	24V	180°	21	900132171
1 We				

			lm	inox
3000K	24V	180°	22	900112171
1 We				


			lm	inox
2700K	24V	360°	50	900132181
2 We				

			lm	inox
3000K	24V	360°	52	900112181
2 We				






ACCESSORIES




Recessed box Zero 45
Ø40x113mm

code **9001**




Power supply 24V 16Watt IP20
118x52x26mm

code **9006**




Recessed box Zero 65
Ø63x113mm

code **9002**




Power supply 24V 20Watt IP20
103x67x21mm

code **9007**




Recessed box Zero 85
Ø80x162mm

code **9003**




Power supply 24V 50Watt IP20
190x60x36mm

code **9008**




Recessed box Zero 110
Ø100x206mm

code **9000**




Power supply 24V DC 70W IP67
267x79x52mm

code **9049**



3-4 way - 4 poles terminal block IP68
53x26x82mm
(only for Zero 85 and Zero 110)

code **9005**



Power supply 16W 110-240V IP65
125x61x31mm

code **9059**

ACCESSORIES:

code **9001 / 9002 / 9003 / 9000 / 9005 / 9006 / 9007 / 9008 / 9049 / 9059**



Tasca

ILLUMINATING MEANS CALLING SOMETHING BY NAME

Tasca is a lighting element designed for recessed wall applications a timeless fixture in its function, ideal as a step marker in walkways and outdoor spaces where efficient yet discreet lighting is needed.

Its compact dimensions and absence of visible screws make it a renewed and contemporary product.

The structure is die-cast aluminium, treated with electrophoresis and coated with polyester powder, the carter is painted in white colour, or alternatively anodized natural or gold.

The LED board is sealed on the heat sink with opal resin, ensuring protection from moisture as well as extremely simple installation; installation boc mandatory.

Tasca è un elemento luminoso per applicazione a parete intramontabile nella sua funzione, ideale come segna passo nei camminamenti e negli spazi esterni nei quali si necessita di un'illuminazione efficiente ma discreta.

Le sue dimensioni compatte e l'assenza di viti a vista lo rendono un prodotto rinnovato e attuale.


La struttura è in alluminio pressofuso, trattato con bagno di cataforesi e verniciato con polvere di poliestere e carter in alluminio verniciato bianco o, opzionale, alluminio anodizzato naturale o oro lucido.

Il vano led è sigillato sul dissipatore con resina opale che ne garantisce la protezione dall'umidità nonché l'estrema semplicità di installazione, da fare obbligatoriamente con cassaforma.





Tasca



Available finishes:



Light Source mid power led
Supply 24V/220-240V
Dimmer upon request
CRI ≥80
IP rating IP65
Electrical Class II, III
Application wall
Diffuser opal resin / white reflector

Power 24V 3,6We
 220-240V 3,6Wled 5We
Led Colour temp. 2700K / 3000K




		lm	white	sand	graphite	aluminium	corten
2700K 3,6 We	24V	306	902432002	902432003	902432004	902432005	902432008
3000K 3,6 We	24V	315	902412002	902412003	902412004	902412005	902412008
		lm	white	sand	graphite	aluminium	corten
2700K 5 We	220-240V II	306	902431002	902431003	902431004	902431005	902431008
3000K 5 We	220-240V II	315	902411002	902411003	902411004	902411005	902411008

The light colour of this fixture may shift by approximately ±150K due to the protective resin covering the leds.


La tonalità di colore è soggetta ad una variazione di ±150K dovuta all'applicazione di resina protettiva sui led.

ACCESSORIES




Recessed box Tasca
85x50x190mm

code **9073**




Power supply 16W 110-240V IP65
125x61x31mm

code **9059**




Gold shield for Tasca
colour **Gold**

code **9074**




Power supply 24V DC 70W IP67
267x79x52mm

code **9049**



Aluminium shield for Tasca
colour **Aluminium**

code **9075**



SPD CL.1 12KV 320V UC max
40x57x20mm

code **9058**

ACCESSORIES:

code **9073 / 9074 / 9075 / 9059 / 9049 / 9058**



Modulo A

DISCOVER NEW PLACES, REDISCOVER WHICH ONES WE ALREADY KNOW

Wall-mounted lamp, made of die-cast aluminium with cathodolysis treatment and a layer of polyester powder paint resistant to outdoor environments.

Available in two shapes: square or rectangular, it can be installed directly on the wall or with a housing box to accommodate the power supply, if needed.


Equipped with Mid-power LED in 2700K and 3000K versions, the diffusing screen, available in aluminium or gold, is discreet and elegant, serving both a functional and aesthetic purpose.

Lampada per installazione a parete, in alluminio pressofuso trattamento di cataforesi e strato di vernice di polvere di poliestere resistente agli ambienti esterni.

Proposta in due forme: quadrata o rettangolare può essere installata direttamente a parete o con la cassaforma dove alloggiare l'eventuale alimentatore, a bordo Mid-power led in versione 2700K e 3000K, discreto ed elegante lo schermo diffondente in alluminio o oro oltre che funzionale diventa anche elemento estetico.



Modulo A/SQ



Available finishes:

- white
- sand
- graphite
- aluminium
- corten
- olive green

Light Source mid power led
Supply 24V
Dimmer PWM
CRI ≥80
IP rating IP65
Electrical Class III
Application wall


Power 24V 2,4Wled
Led Colour temp. 2700K / 3000K



		lm	white	sand	graphite	aluminium	corten	green
2700K	24V 2,4Wled	97	900631002	900631003	900631004	900631005	900631008	9006310016
		lm	white	sand	graphite	aluminium	corten	green
3000K	24V 2,4Wled	102	900611002	900611003	900611004	900611005	900611008	9006110016



Modulo A/RC



Available finishes:

- white
- sand
- graphite
- aluminium
- corten
- olive green

Light Source mid power led
Supply 24V
Dimmer PWM
CRI ≥80
IP rating IP65
Electrical Class III
Application wall


Power 24V 4,6Wled
Led Colour temp. 2700K / 3000K



		lm	white	sand	graphite	aluminium	corten	green
2700K	24V 4,6Wled	185	900631012	900631013	900631014	900631015	900631018	900631016
3000K	24V 4,6Wled	195	900611012	900611013	900611014	900611015	900611018	900611016




ACCESSORIES




Recessed box Modulo A SQ
71x71x53,5mm

code **9018**




Power supply 8V 110-2240V IP54
44x46x26mm
(for recessed box 9018 and 9019)

code **9037**




Recessed box Modulo A RC
74x106x53,5mm

code **9019**




Power supply 24V 16Watt IP20
118x52x26mm

code **9006**




Aluminium shield
for Modulo A/SQ
colour **Gold**

code **9038**




Power supply 24V 50Watt IP20
190x60x36mm

code **9008**



Gold shield
for Modulo A/RC
colour **Gold**

code **9039**



Power supply 16W 110-240V IP65
125x61x31mm

code **9059**

ACCESSORIES:

code **9018 / 9019 / 9038 / 9039 / 9037 / 9006 / 9008 / 9059**



DX

HIGHLIGHTING AND ILLUMINATING SPACES

The Dx projector family stands out for its extraordinary versatility, thanks to a range of accessories that make it ideal for various applications. Dx projectors are suitable for installations on solid surfaces, such as floors, ceilings, and walls, as well as for ground installations using stakes.

Made from high-quality aluminum, turned, anodized, and painted with a diffusing glass fixed with silicone adhesive to ensure IP protection, they are equipped with power LEDs.

Their adjustability, combined with low-luminance lighting and refined finishes, guarantees excellent aesthetic and functional performance in any setting.

Both the 38 mm and 54 mm models can be used as projectors, by directly attaching the bracket or available in the versions with a stem.

The DX 38 is the smallest spot projector, powered by 24V low voltage, and is available in 3 different heights (60 mm, 160 mm, 500 mm) for installation on solid surfaces with a base, or in the ground with the spike version. It is also offered with an integrated power supply in the specific version with a base (92x59 mm).

The DX54 is available in the 24V version or with an integrated 220-240V power supply and in 3 heights (70 mm, 170 mm, 510 mm); for installation on solid surfaces with the version with a base or on the ground with the spike version.

La famiglia di proiettori Dx si distingue per la sua straordinaria versatilità, grazie a una gamma di accessori che la rende ideale per diverse applicazioni.

I proiettori Dx sono adatti per installazioni su superfici solide, come pavimenti, soffitti e pareti, oltre che per installazioni a terra grazie all'uso del picchetto.

Realizzato in alluminio di primaria qualità, tornito, anodizzato e verniciato con vetro diffusore fissato con collante silconico a garantirne la tenuta IP, equipaggiato da power led.


La loro orientabilità, combinata con un'illuminazione a bassa luminanza e le raffinate finiture, garantisce un'eccellente resa estetica e funzionale in qualsiasi contesto. Sia il modello 38mm che il 54mm sono utilizzabili come proiettore, fissando direttamente la staffa oppure disponibili nelle versioni su stelo.

DX 38 è lo spot più piccolo, alimentato 24V bassa tensione è disponibile in 3 altezze differenti (h.60mm, h.160mm, h.500mm) per installazione su superfici solide nella versione con basetta o nel terreno per la versione con picchetto.

Proposto anche con alimentatore integrato nella versione specifica con base (92x59mm).

DX54 disponibile in versione 24V o con alimentatore integrato nel corpo 220-240V e in 3 altezze (h.70mm, h.170mm, h.510mm); per installazione su superfici solide nella versione con basetta o nel terreno la versione con picchetto.



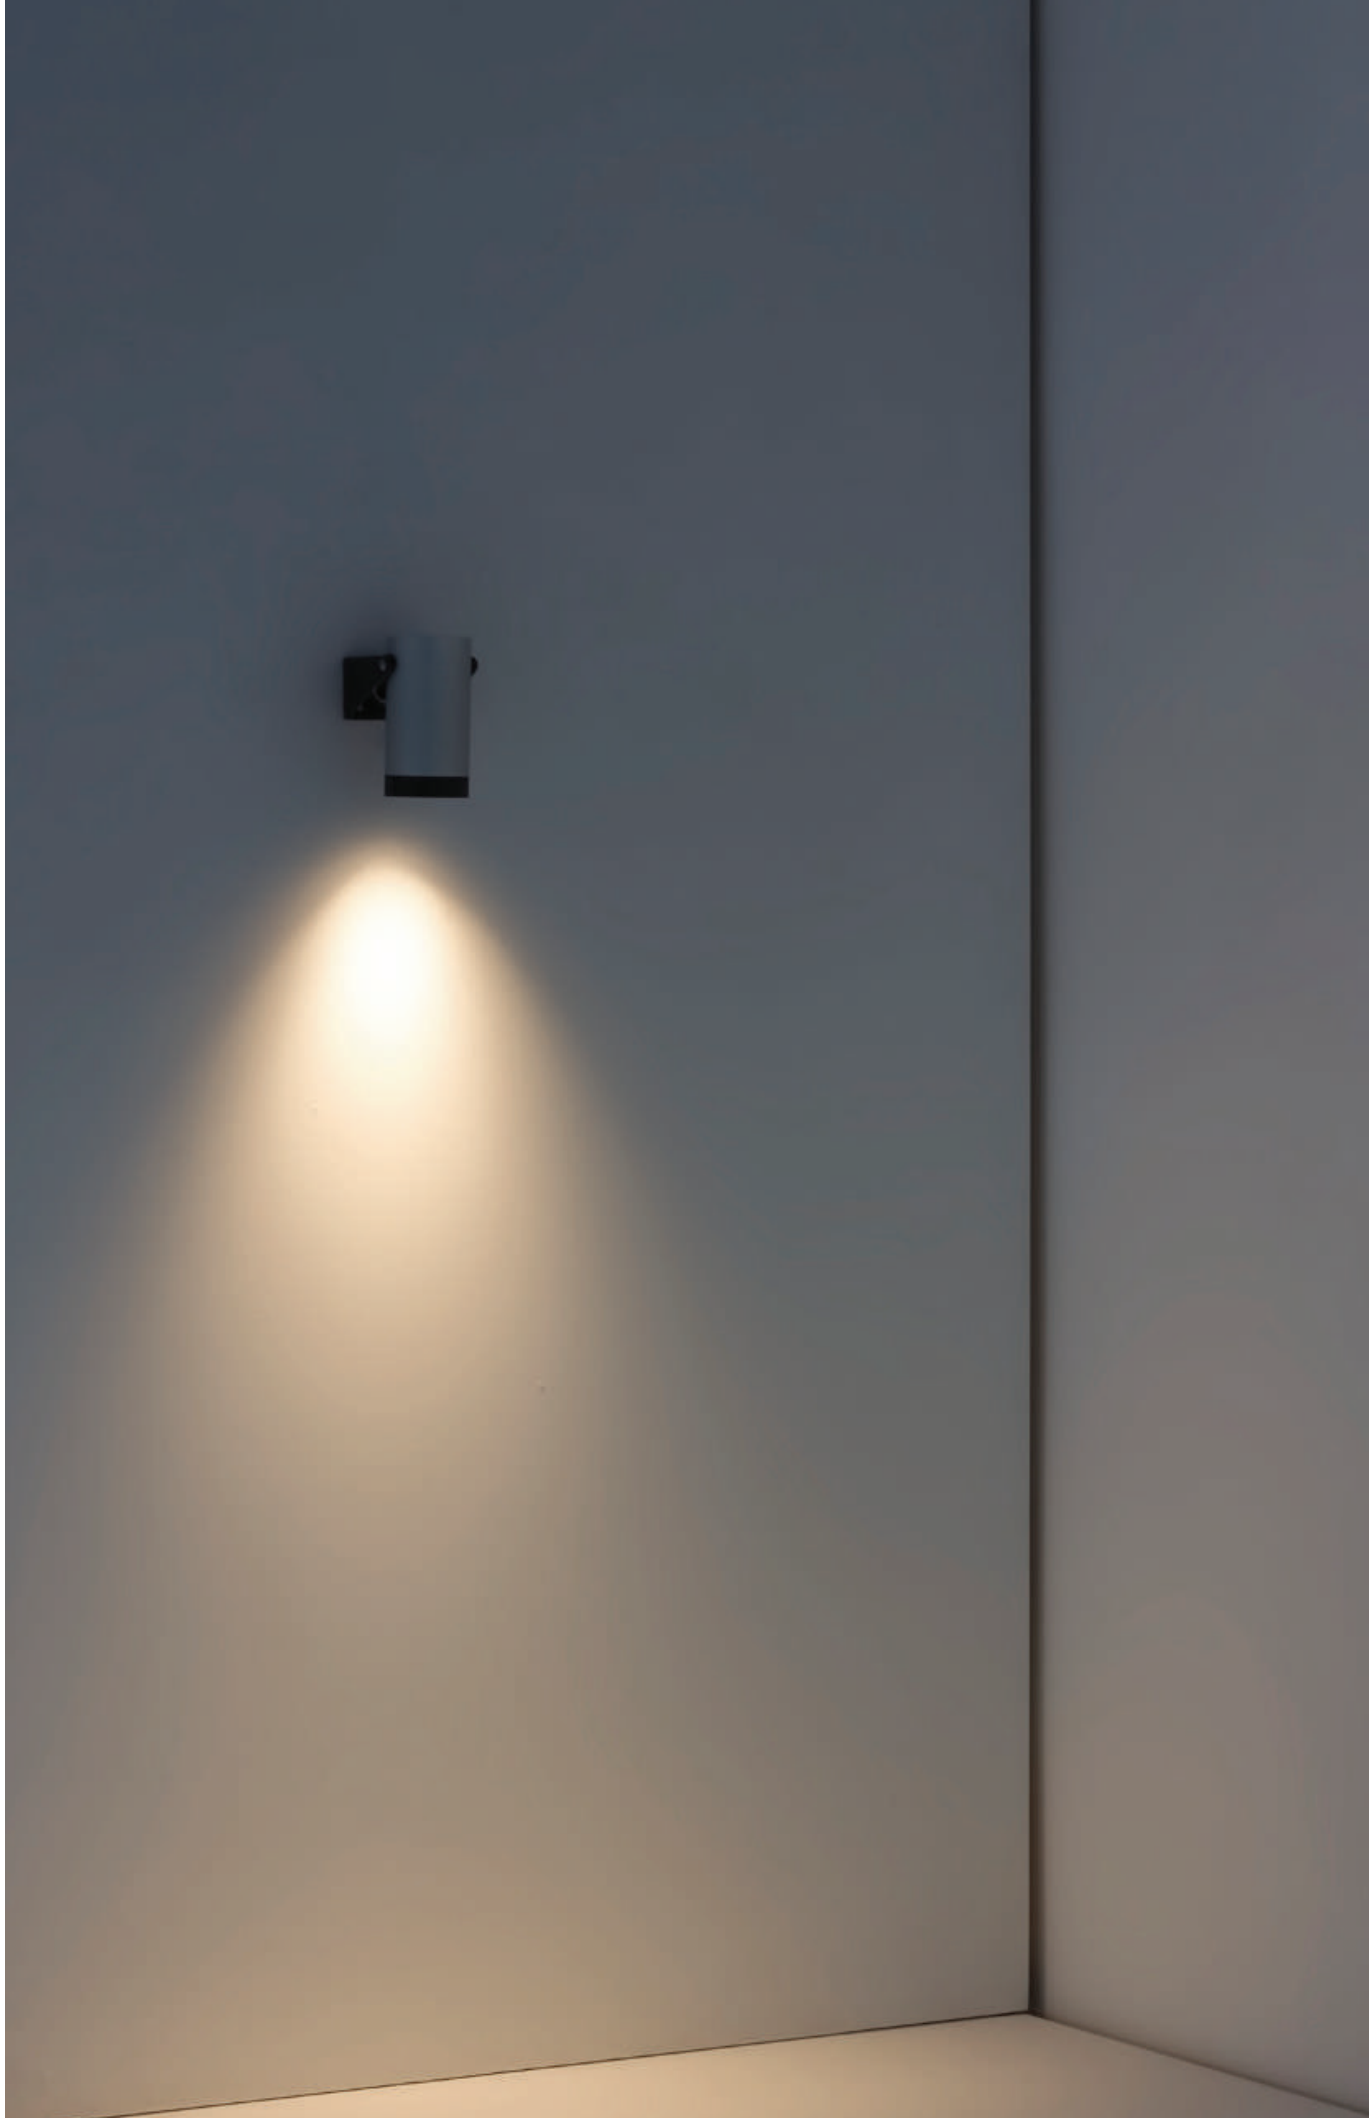










Dx Ø38

18° | 36°

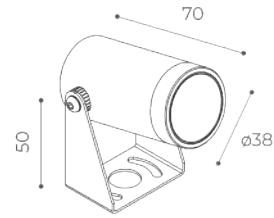

Available finishes:



Light Source power led
Supply 24V
Dimmer PWM
CRI ≥80
IP rating IP65
Electrical Class III
Application wall, ground, roof
Diffuser transparent glass

Power 24V 2Wled - 3We
Led Colour temp. 2700K / 3000K




		fascio	lm	aluminium	bronze	black	green
2700K 2Wled 3We	24V	▲ 18°with honeycomb	98	900432006	900432009	900432007	9004320016
		▲ 36°with honeycomb	74	900432016	900432019	900432017	9004320116
		▲ 18°without honeycomb	103	900432186	900432189	900432187	9004321816
		▲ 36°without honeycomb	222	900432196	900432199	900432197	9004321916

		fascio	lm	aluminium	bronze	black	green
3000K 2Wled 3We	24V	▲ 18°with honeycomb	103	900412006	900412009	900412007	9004120016
		▲ 36°with honeycomb	78	900412016	900412019	900412017	9004120116
		▲ 18°without honeycomb	178	900412186	900412189	900412187	9004121816
		▲ 36°without honeycomb	234	900412196	900412199	900412197	9004121916

Dx Ø38 Stem Spike h.60

18° | 36°



Available finishes:



Light Source power led
Supply 24V
Dimmer PWM
CRI ≥80
IP rating IP65
Electrical Class III
Application ground
Diffuser transparent glass

Power 24V 2Wled - 3We
Led Colour temp. 2700K / 3000K




		fascio	lm	aluminium	bronze	black	green
2700K 2Wled 3We	24V	▲ 18°with honeycomb	98	900432056	900432059	900432057	9004320516
		▲ 36°with honeycomb	74	900432086	900432089	900432087	9004320816
		▲ 18°without honeycomb	103	900432246	900432249	900432247	9004322416
		▲ 36°without honeycomb	222	900432276	900432279	900432277	9004322716

		fascio	lm	aluminium	bronze	black	green
3000K 2Wled 3We	24V	▲ 18°with honeycomb	103	900412056	900412059	900412057	9004120516
		▲ 36°with honeycomb	78	900412086	900412089	900412087	9004120816
		▲ 18°without honeycomb	178	900412246	900412249	900412247	9004122416
		▲ 36°without honeycomb	234	900412276	900412279	900412277	9004122716

Dx Ø38 Stem Spike h.160

18° | 36°



Available finishes:



Light Source power led
Supply 24V
Dimmer PWM
CRI ≥80
IP rating IP65
Electrical Class III
Application ground
Diffuser transparent glass

Power 24V 2Wled - 3We
Led Colour temp. 2700K / 3000K




		fascio	lm	aluminium	bronze	black	green
2700K 2Wled 3We	24V	▲ 18°with honeycomb	98	900432066	900432069	900432067	9004320616
		▲ 36°with honeycomb	74	900432096	900432099	900432097	9004320916
		▲ 18°without honeycomb	103	900432256	900432259	900432257	9004322516
		▲ 36°without honeycomb	222	900432286	900432289	900432287	9004322816

		fascio	lm	aluminium	bronze	black	green
3000K 2Wled 3We	24V	▲ 18°with honeycomb	103	900412066	900412069	900412067	9004120616
		▲ 36°with honeycomb	78	900412096	900412099	900412097	9004120916
		▲ 18°without honeycomb	178	900412256	900412259	900412257	9004122516
		▲ 36°without honeycomb	234	900412286	900412289	900412287	9004122816

Dx Ø38 Stem Spike h.500

18° | 36°

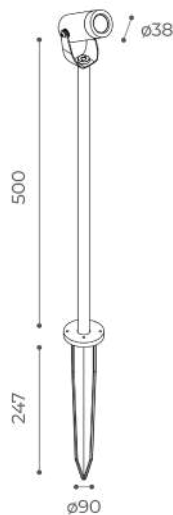

Available finishes:



Light Source power led
Supply 24V
Dimmer PWM
CRI ≥80
IP rating IP65
Electrical Class III
Application ground
Diffuser transparent glass

Power 24V 2Wled - 3We
Led Colour temp. 2700K / 3000K




		fascio	lm	aluminium	bronze	black	green
2700K 2Wled 3We	24V	▲ 18°with honeycomb	98	900432076	900432079	900432077	9004320716
		▲ 36°with honeycomb	74	900432106	900432109	900432107	9004321016
		▲ 18°without honeycomb	103	900432266	900432269	900432267	9004322616
		▲ 36°	222	900432296	900432299	900432297	9004322916

		fascio	lm	aluminium	bronze	black	green
3000K 2Wled 3We	24V	▲ 18°with honeycomb	103	900412076	900412079	900412077	9004120716
		▲ 36°with honeycomb	78	900412106	900412109	900412107	9004121016
		▲ 18°without honeycomb	178	900412266	900412269	900412267	9004122616
		▲ 36°without honeycomb	234	900412296	900412299	900412297	9004122916

Dx Ø38 Stem Base h.60

18° | 36°



Available finishes:



Light Source power led
Supply 220-240V
Dimmer not
CRI ≥80
IP rating IP65
Electrical Class II
Application ground
Diffuser transparent glass

Power 220-240V 2Wled - 3,5We
Led Colour temp. 2700K / 3000K




		fascio	lm	aluminium	bronze	black	green
2700K	220-240V	▲ 18°with honeycomb	98	900431436	900431439	900431437	9004314316
2Wled		▲ 36°with honeycomb	74	900431496	900431499	900431497	9004314916
3,5We		▲ 18°without honeycomb	103	900431466	900431469	900431467	9004314616
		▲ 36°without honeycomb	222	900431526	900431529	900431527	9004315216

		fascio	lm	aluminium	bronze	black	green
3000K	220-240V	▲ 18°with honeycomb	103	900411436	900411439	900411437	9004114316
2Wled		▲ 36°with honeycomb	78	900411496	900411499	900411497	9004114916
3,5We		▲ 18°without honeycomb	178	900411466	900411469	900411467	9004114616
		▲ 36°without honeycomb	234	900411526	900411529	900411527	9004115216

Dx Ø38 Stem Base h.160

18° | 36°



Available finishes:



Light Source power led
Supply 220-240V
Dimmer not
CRI ≥80
IP rating IP65
Electrical Class II
Application ground
Diffuser transparent glass

Power 220-240V 2Wled - 3,5We
Led Colour temp. 2700K / 3000K




		fascio	lm	aluminium	bronze	black	green
2700K 2Wled 3,5We	220-240V	▲ 18°with honeycomb	98	900431446	900431449	900431447	900431446
		▲ 36°with honeycomb	74	900431506	900431509	900431507	900431506
		▲ 18°without honeycomb	103	900431476	900431479	900431477	900431476
		▲ 36°without honeycomb	222	900431536	900431539	900431537	900431536

		fascio	lm	aluminium	bronze	black	green
3000K 2Wled 3,5We	220-240V	▲ 18°with honeycomb	103	900411446	900411449	900411447	900411446
		▲ 36°with honeycomb	78	900411506	900411509	900411507	900411506
		▲ 18°without honeycomb	178	900411476	900411479	900411477	900411476
		▲ 36°without honeycomb	234	900411536	900411539	900411537	900411536

Dx Ø38 Stem Base h.500

18° | 36°

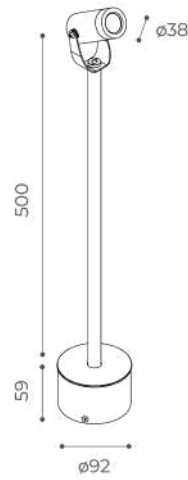

Available finishes:



Light Source power led
Supply 220-240V
Dimmer not
CRI ≥80
IP rating IP65
Electrical Class II
Application ground
Diffuser transparent glass


Power 220-240V 2Wled - 3,5We
Led Colour temp. 2700K / 3000K



		fascio	lm	aluminium	bronze	black	green
2700K 2Wled 3,5We	220-240V	▲ 18°with honeycomb	98	900431456	900431459	900431457	9004314516
		▲ 36°with honeycomb	74	900431516	900431519	900431517	9004315116
		▲ 18°without honeycomb	103	900431486	900431489	900431487	9004314816
		▲ 36°without honeycomb	222	900431546	900431549	900431547	9004315416


		fascio	lm	aluminium	bronze	black	green
3000K 2Wled 3,5We	220-240V	▲ 18°with honeycomb	103	900411456	900411459	900411457	9004114516
		▲ 36°with honeycomb	78	900411516	900411519	900411517	9004115116
		▲ 18°without honeycomb	178	900411486	900411489	900411487	9004114816
		▲ 36°without honeycomb	234	900411546	900411549	900411547	9004115416

ACCESSORIES




Power supply 8V 110-2240V IP54
44x46x26mm

code **9037**




Power supply 24V DC 70W IP67
267x79x52mm

code **9049**




Power supply 24V 16Watt IP20
118x52x26mm

code **9006**




Power supply 24V DC 150W IP67
267x79x52mm

code **9057**




Power supply 24V 20Watt IP20
103x67x21mm

code **9007**




SPD CL.1 12KV 320V UC max
40x57x20mm

code **9058**




Power supply 24V 50Watt IP20
190x60x36mm

code **9008**




Tube Frame
Ø38x25mm
colour **Black**

code **90117**



Power supply 16W 110-240V IP65
125x61x31mm

code **9059**



Eyelid Frame
Ø38x39mm
colour **Black**


code **90127**

ACCESSORIES:

code **9037 / 9006 / 9007 / 9008 / 9059 / 9049 / 9057 / 9058 / 90117 / 90127**

Dx Ø54

10° | 26° | 52°

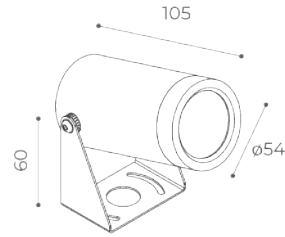

Available finishes:



Light Source
Supply
Dimmer
CRI
IP rating
Electrical Class
Application
Diffuser

power led
24V / 220-240V
only 24V (PWM)
≥80
IP65
II, III
wall, ground, roof
transparent glass


Power 24V 5,8Wled -6,3We
220-240V 5,8Wled - 6,9We
Led Colour temp. 2700K / 3000K



		fascio	lm	aluminium	bronze	black	green
2700K 5,8Wled 6,3We	24V III	▲ 10°with honeycomb	243	900432436	900432439	900432437	9004324316
		▲ 26°with honeycomb	251	900432036	900432039	900432037	9004320316
		▲ 52°with honeycomb	135	900432046	900432049	900432047	9004320416
		▲ 10°without honeycomb	405	900432446	900432449	900432447	9004324416
		▲ 26°without honeycomb	432	900432206	900432209	900432207	9004322016
		▲ 52°without honeycomb	409	900432216	900432219	900432217	9004322116
<hr/>							
		fascio	lm	aluminium	bronze	black	green
3000K 5,8Wled 6,3We	24V III	▲ 10°with honeycomb	253	900412436	900412439	900412437	9004124316
		▲ 26°with honeycomb	264	900412036	900412039	900412037	9004120316
		▲ 52°with honeycomb	142	900412046	900412049	900412047	9004120416
		▲ 10°without honeycomb	422	900412446	900412449	900412447	9004124416
		▲ 26°without honeycomb	455	900412206	900412209	900412207	9004122016
		▲ 52°without honeycomb	431	900412216	900412219	900412217	9004122116
<hr/>							
		fascio	lm	aluminium	bronze	black	green
2700K 5,8Wled 6,9We	220-240V	▲ 10°with honeycomb	243	900431556	900431559	900431557	9004315516
		▲ 26°with honeycomb	251	900431006	900431009	900431007	9004310016
		▲ 52°with honeycomb	135	900431016	900431019	900431017	9004310116
		▲ 10°without honeycomb	405	900431566	900431569	900431567	9004315616
		▲ 26°without honeycomb	432	900431226	900431229	900431227	9004312216
		▲ 52°without honeycomb	409	900431236	900431239	900431237	9004312316
<hr/>							
		fascio	lm	aluminium	bronze	black	green
3000K 5,8Wled 6,9We	220-240V	▲ 10°with honeycomb	253	900411556	900411559	900411557	9004115516
		▲ 26°with honeycomb	264	900411006	900411009	900411007	9004110016
		▲ 52°with honeycomb	142	900411016	900411019	900411017	9004110116
		▲ 10°without honeycomb	422	900411566	900411569	900411567	9004115616
		▲ 26°without honeycomb	455	900411226	900411229	900411227	9004112216
		▲ 52°without honeycomb	431	900411236	900411239	900411237	9004112316

Dx Ø54 Stem Spike h.70

10° | 26° | 52°

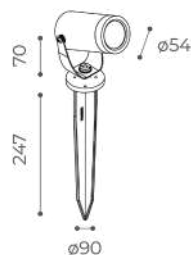

Available finishes:



Light Source
Supply
Dimmer
CRI
IP rating
Electrical Class
Application
Diffuser

power led
24V / 220-240V
only 24V (PWM)
≥80
IP65
II, III
ground
transparent glass

Power 24V 5,8Wled -6,3We
220-240V 5,8Wled - 6,9We
Led Colour temp. 2700K / 3000K



		fascio	lm	aluminium	bronze	black	green
2700K 5,8Wled 6,3We	24V III	▲ 10°with honeycomb	243	900432576	900432579	900432577	9004325716
		▲ 26°with honeycomb	251	900432116	900432119	900432117	9004321116
		▲ 52°with honeycomb	135	900432146	900432149	900432147	9004321416
		▲ 10°without honeycomb	405	900432586	900432589	900432587	9004325816
		▲ 26°without honeycomb	432	900432306	900432309	900432307	9004323016
		▲ 52°without honeycomb	409	900432336	900432339	900432337	9004323316


		fascio	lm	aluminium	bronze	black	green
3000K 5,8Wled 6,3We	24V III	▲ 10°with honeycomb	253	900412576	900412579	900412577	9004125716
		▲ 26°with honeycomb	264	900412116	900412119	900412117	9004121116
		▲ 52°with honeycomb	142	900412146	900412149	900412147	9004121416
		▲ 10°without honeycomb	422	900412586	900412589	900412587	9004125816
		▲ 26°without honeycomb	455	900412306	900412309	900412307	9004123016
		▲ 52°without honeycomb	431	900412336	900412339	900412337	9004123316

		fascio	lm	aluminium	bronze	black	green
2700K 5,8Wled 6,9We	220-240V	▲ 10°with honeycomb	243	900431576	900431579	900431577	9004315716
		▲ 26°with honeycomb	251	900431026	900431029	900431027	9004310216
		▲ 52°with honeycomb	135	900431056	900431059	900431057	9004310516
		▲ 10°without honeycomb	405	900431586	900431589	900431587	9004315816
		▲ 26°without honeycomb	432	900431366	900431369	900431367	9004313616
		▲ 52°without honeycomb	409	900431396	900431399	900431397	9004313916

		fascio	lm	aluminium	bronze	black	green
3000K 5,8Wled 6,9We	220-240V	▲ 10°with honeycomb	253	900411576	900411579	900411577	9004115716
		▲ 26°with honeycomb	264	900411026	900411029	900411027	9004110216
		▲ 52°with honeycomb	142	900411056	900411059	900411057	9004110516
		▲ 10°without honeycomb	422	900411586	900411589	900411587	9004115816
		▲ 26°without honeycomb	455	900411366	900411369	900411367	9004113616
		▲ 52°without honeycomb	431	900411396	900411399	900411397	9004113916

Dx Ø54 Stem Spike h.170

10° | 26° | 52°

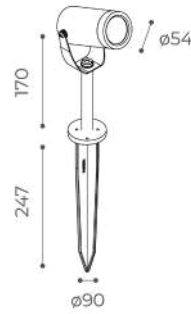

Available finishes:



Light Source power led
Supply 24V / 220-240V
Dimmer only 24V (PWM)
CRI ≥80
IP rating IP65
Electrical Class II, III
Application ground
Diffuser transparent glass


Power 24V 5,8Wled -6,3We
 220-240V 5,8Wled - 6,9We
Led Colour temp. 2700K / 3000K



		fascio	lm	aluminium	bronze	black	green
2700K 5,8Wled 6,3We	24V III	▲ 10°with honeycomb	243	900432596	900432599	900432597	9004325916
		▲ 26°with honeycomb	251	900432126	900432129	900432127	9004321216
		▲ 52°with honeycomb	135	900432156	900432159	900432157	9004321516
		▲ 10°without honeycomb	405	900432606	900432609	900432607	9004326016
		▲ 26°without honeycomb	432	900432316	900432319	900432317	9004323116
		▲ 52°without honeycomb	409	900432346	900432349	900432347	9004323416
3000K 5,8Wled 6,3We	24V III	▲ 10°with honeycomb	253	900412596	900412599	900412597	9004125916
		▲ 26°with honeycomb	264	900412126	900412129	900412127	9004121216
		▲ 52°with honeycomb	142	900412156	900412159	900412157	9004121516
		▲ 10°without honeycomb	422	900412606	900412609	900412607	9004126016
		▲ 26°without honeycomb	455	900412316	900412319	900412317	9004123116
		▲ 52°without honeycomb	431	900412346	900412349	900412347	9004123416
2700K 5,8Wled 6,9We	220-240V	▲ 10°with honeycomb	243	900431596	900431599	900431597	9004315916
		▲ 26°with honeycomb	251	900431036	900431039	900431037	9004310316
		▲ 52°with honeycomb	135	900431066	900431069	900431067	9004310616
		▲ 10°without honeycomb	405	900431606	900431609	900431607	9004316016
		▲ 26°without honeycomb	432	900431376	900431379	900431377	9004313716
		▲ 52°without honeycomb	409	900431406	900431409	900431407	9004314016
3000K 5,8Wled 6,9We	220-240V	▲ 10°with honeycomb	253	900411596	900411599	900411597	9004115916
		▲ 26°with honeycomb	264	900411036	900411039	900411037	9004110316
		▲ 52°with honeycomb	142	900411066	900411069	900411067	9004110616
		▲ 10°without honeycomb	422	900411606	900411609	900411607	9004116016
		▲ 26°without honeycomb	455	900411376	900411379	900411377	9004113716
		▲ 52°without honeycomb	431	900411406	900411409	900411407	9004114016

Dx Ø54 Stem Spike h.510

10° | 26° | 52°

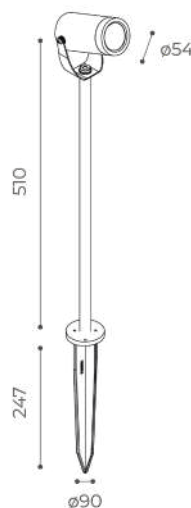

Available finishes:



Light Source power led
Supply 24V / 220-240V
Dimmer only 24V (PWM)
CRI ≥80
IP rating IP65
Electrical Class II, III
Application ground
Diffuser transparent glass


Power 24V 5,8Wled -6,3We
 220-240V 5,8Wled - 6,9We
Led Colour temp. 2700K / 3000K



		fascio	lm	aluminium	bronze	black	green
2700K 5,8Wled 6,3We	24V III	▲ 10°with honeycomb	243	900432616	900432619	900432617	9004326116
		▲ 26°with honeycomb	251	900432136	900432139	900432137	9004321316
		▲ 52°with honeycomb	135	900432166	900432169	900432167	9004321616
		▲ 10°without honeycomb	405	900432626	900432629	900432627	9004326216
		▲ 26°without honeycomb	432	900432326	900432329	900432327	9004323216
		▲ 52°without honeycomb	409	900432356	900432359	900432357	9004323516
3000K 5,8Wled 6,3We	24V III	▲ 10°with honeycomb	253	900412616	900412619	900412617	9004126116
		▲ 26°with honeycomb	264	900412136	900412139	900412137	9004121316
		▲ 52°with honeycomb	142	900412166	900412169	900412167	9004121616
		▲ 10°without honeycomb	422	900412626	900412629	900412627	9004126216
		▲ 26°without honeycomb	455	900412326	900412329	900412327	9004123216
		▲ 52°without honeycomb	431	900412356	900412359	900412357	9004123516
2700K 5,8Wled 6,9We	220-240V	▲ 10°with honeycomb	243	900431616	900431619	900431617	9004316116
		▲ 26°with honeycomb	251	900431046	900431049	900431047	9004310416
		▲ 52°with honeycomb	135	900431076	900431079	900431077	9004310716
		▲ 10°without honeycomb	405	900431626	900431629	900431627	9004316216
		▲ 26°without honeycomb	432	900431386	900431389	900431387	9004313816
		▲ 52°without honeycomb	409	900431426	900431429	900431427	9004314216
3000K 5,8Wled 6,9We	220-240V	▲ 10°with honeycomb	253	900411616	900411619	900411617	9004116116
		▲ 26°with honeycomb	264	900411046	900411049	900411047	9004110416
		▲ 52°with honeycomb	142	900411076	900411079	900411077	9004110716
		▲ 10°without honeycomb	422	900411626	900411629	900411627	9004116216
		▲ 26°without honeycomb	455	900411386	900411389	900411387	9004113816
		▲ 52°without honeycomb	431	900411426	900411429	900411427	9004114216




ACCESSORIES




Power supply 8V 110-2240V IP54
44x46x26mm

code **9037**




Power supply 24V DC 70W IP67
267x79x52mm

code **9049**




Power supply 24V 16Watt IP20
118x52x26mm

code **9006**




Power supply 24V DC 150W IP67
267x79x52mm

code **9057**




Power supply 24V 20Watt IP20
103x67x21mm

code **9007**




Tube Frame
Ø54x35mm
colour **Black**

code **90157**




Power supply 24V 50Watt IP20
190x60x36mm

code **9008**




Eyelid Frame
Ø54x50mm
colour **Black**

code **90167**




Power supply 16W 110-240V IP65
125x61x31mm

code **9059**




2 way - 3 poles terminal block IP68
Ø23x66mm

code **9004**



SPD CL.1 12KV 320V UC max
40x57x20mm

code **9058**



3-4 way - 4 poles terminal block IP68
53x26x82mm

code **9005**

ACCESSORIES:

code **9037 / 9006 / 9007 / 9008 / 9059 / 9049 / 9057 / 9058 / 90157 / 90167 / 9004 / 9005**



Muse

A NEW RHYTHM OVER ALL THINGS, SETTING THE WORLD TO SPIN IN A GRACEFUL DANCE

A new concept of outdoor lamp, a modular system that offers the possibility of modeling and changing even over time, based on the needs of the user.

Composed of 3 main emission sources: CAPSULE, in anodized aluminum, is proposed as an elegant light source with a modern design which evolves into STILLA, more decorative and easy, and finally SPOT, a projector for more technical installations.

The combination of these three light sources with the various installation accessories offers multiple lighting solutions.


Una nuova concezione di lampada per esterni, un sistema modulare che offre la possibilità di modellarsi e cambiare anche nel tempo sulla base delle esigenze del fruitore.

Composta da 3 fonti emissive principali: CAPSULE, in alluminio anodizzato si propone come una fonte luminosa elegante e dal design moderno per poi evolversi in STILLA, più decorativa e d'atmosfera e per finire SPOT, un proiettore per installazioni più tecniche.

La combinazione di queste tre fonti luminose con i vari accessori per l'installazione offre molteplici soluzioni illuminotecniche.



Muse Stilla Wall



Available finishes:

- black
- olive green **on request*

Light Source mid power led
Supply 24V
Dimmer PWM
CRI ≥90
Electrical Class III
IP rating 65
Application wall
Diffuser sandblasted glass


Power 24V 1,5Wled
Led Colour temp. 2700/3000K




		lm	black
2700K 1,5Wled	24V	245	902032637
3000K 1,5Wled	24V	255	902012637



Muse Stilla Decò Copper

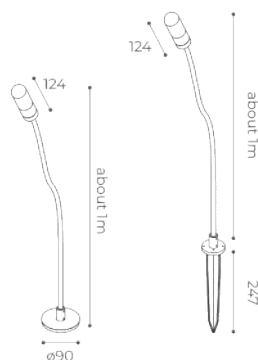

Available finishes:



Light Source mid power led
Supply 24V
Dimmer PWM
CRI ≥90
Electrical Class III
IP rating 65
Application floor, ground
Diffuser sandblasted glass

Power 24V 1,5Wled
Led Colour temp. 2700/3000K




			lm	black	bronze
2700K 1,5Wled	24V	with base	245	902032657	902032659
		with spike	245	902031657	902031659
			lm	black	bronze
3000K 1,5Wled	24V	with base	255	902012657	902012659
		with spike	255	902011657	902011659



Muse Stilla Decò Bend-Shape

h500 / h800

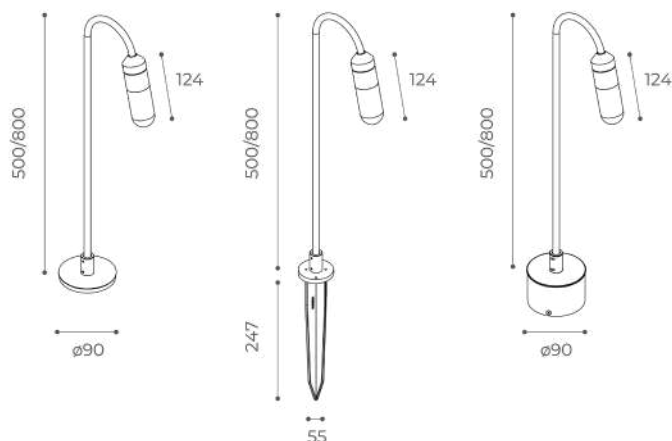

Available finishes:



Light Source mid power led
Supply 24V / 220-240V
Dimmer only 24V (PWM)
CRI ≥90
Electrical Class II, III
IP rating 65
Application floor, ground
Diffuser sandblasted glass

Power 24V 1,5Wled
 220-240V 1,5Wled 1,4We
Led Colour temp. 2700/3000K



h500

				lm	black	green
2700K 1,5Wled 1,5We	24V	III	with base	245	902032667	9020326616
			with spike	245	902032677	9020326716
1,5Wled 2,4We	220-240V	II	with base	245	902031667	9020316616

				lm	black	green
3000K 1,5Wled 1,5We	24V	III	with base	255	902012667	9020126616
			with spike	255	902012677	9020126716
1,5Wled 2,4We	220-240V	II	with base	255	902011667	9020116616

h800


				lm	black	green
2700K 1,5Wled 1,5We	24V	III	with base	245	902032687	9020326816
			with spike	245	902032697	9020326916
1,5Wled 2,4We	220-240V	II	with base	245	902031687	9020316816

				lm	black	green
3000K 1,5Wled 1,5We	24V	III	with base	255	902012687	9020126816
			with spike	255	902012697	9020126916
1,5Wled 2,4We	220-240V	II	with base	255	902011687	9020116816




Muse Stilla Decò Stem

h500 / h800

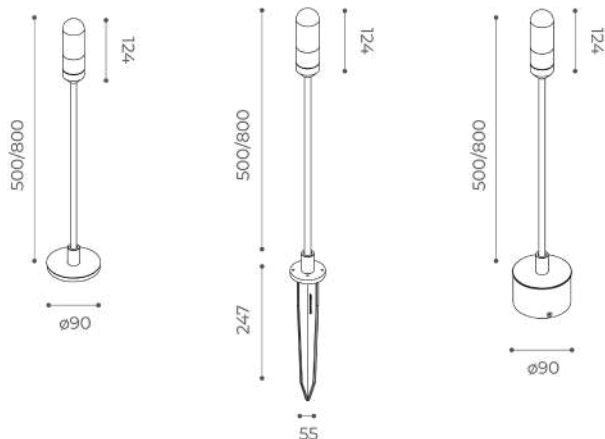

Available finishes:



Light Source mid power led
Supply 24V / 220-240V
Dimmer only 24V (PWM)
CRI ≥90
Electrical Class II, III
IP rating 65
Application floor, ground, roof
Diffuser sandblasted glass

Power 24V 1,5Wled
 220-240V 1,5Wled 1,4We
Led Colour temp. 2700/3000K



h500

				lm	black	green
2700K 1,5Wled 1,5We 1,5Wled 2,4We	24V	III	with base	245	902032707	9020327016
			with spike	245	902032717	9020327116
	220-240V	II	with base	245	902031707	9020317016


3000K 1,5Wled 1,5We 1,5Wled 2,4We	24V	III	with base	255	902012707	9020127016
			with spike	255	902012717	9020127116
	220-240V	II	with base	255	902011707	9020117016

h800

2700K 1,5Wled 1,5We 1,5Wled 2,4We	24V	III	with base	245	902032727	9020327216
			with spike	245	902032737	9020327316
	220-240V	II	with base	245	902031727	9020317216

3000K 1,5Wled 1,5We 1,5Wled 2,4We	24V	III	with base	255	902012727	9020127216
			with spike	255	902012737	9020127316
	220-240V	II	with base	255	902011727	9020117216




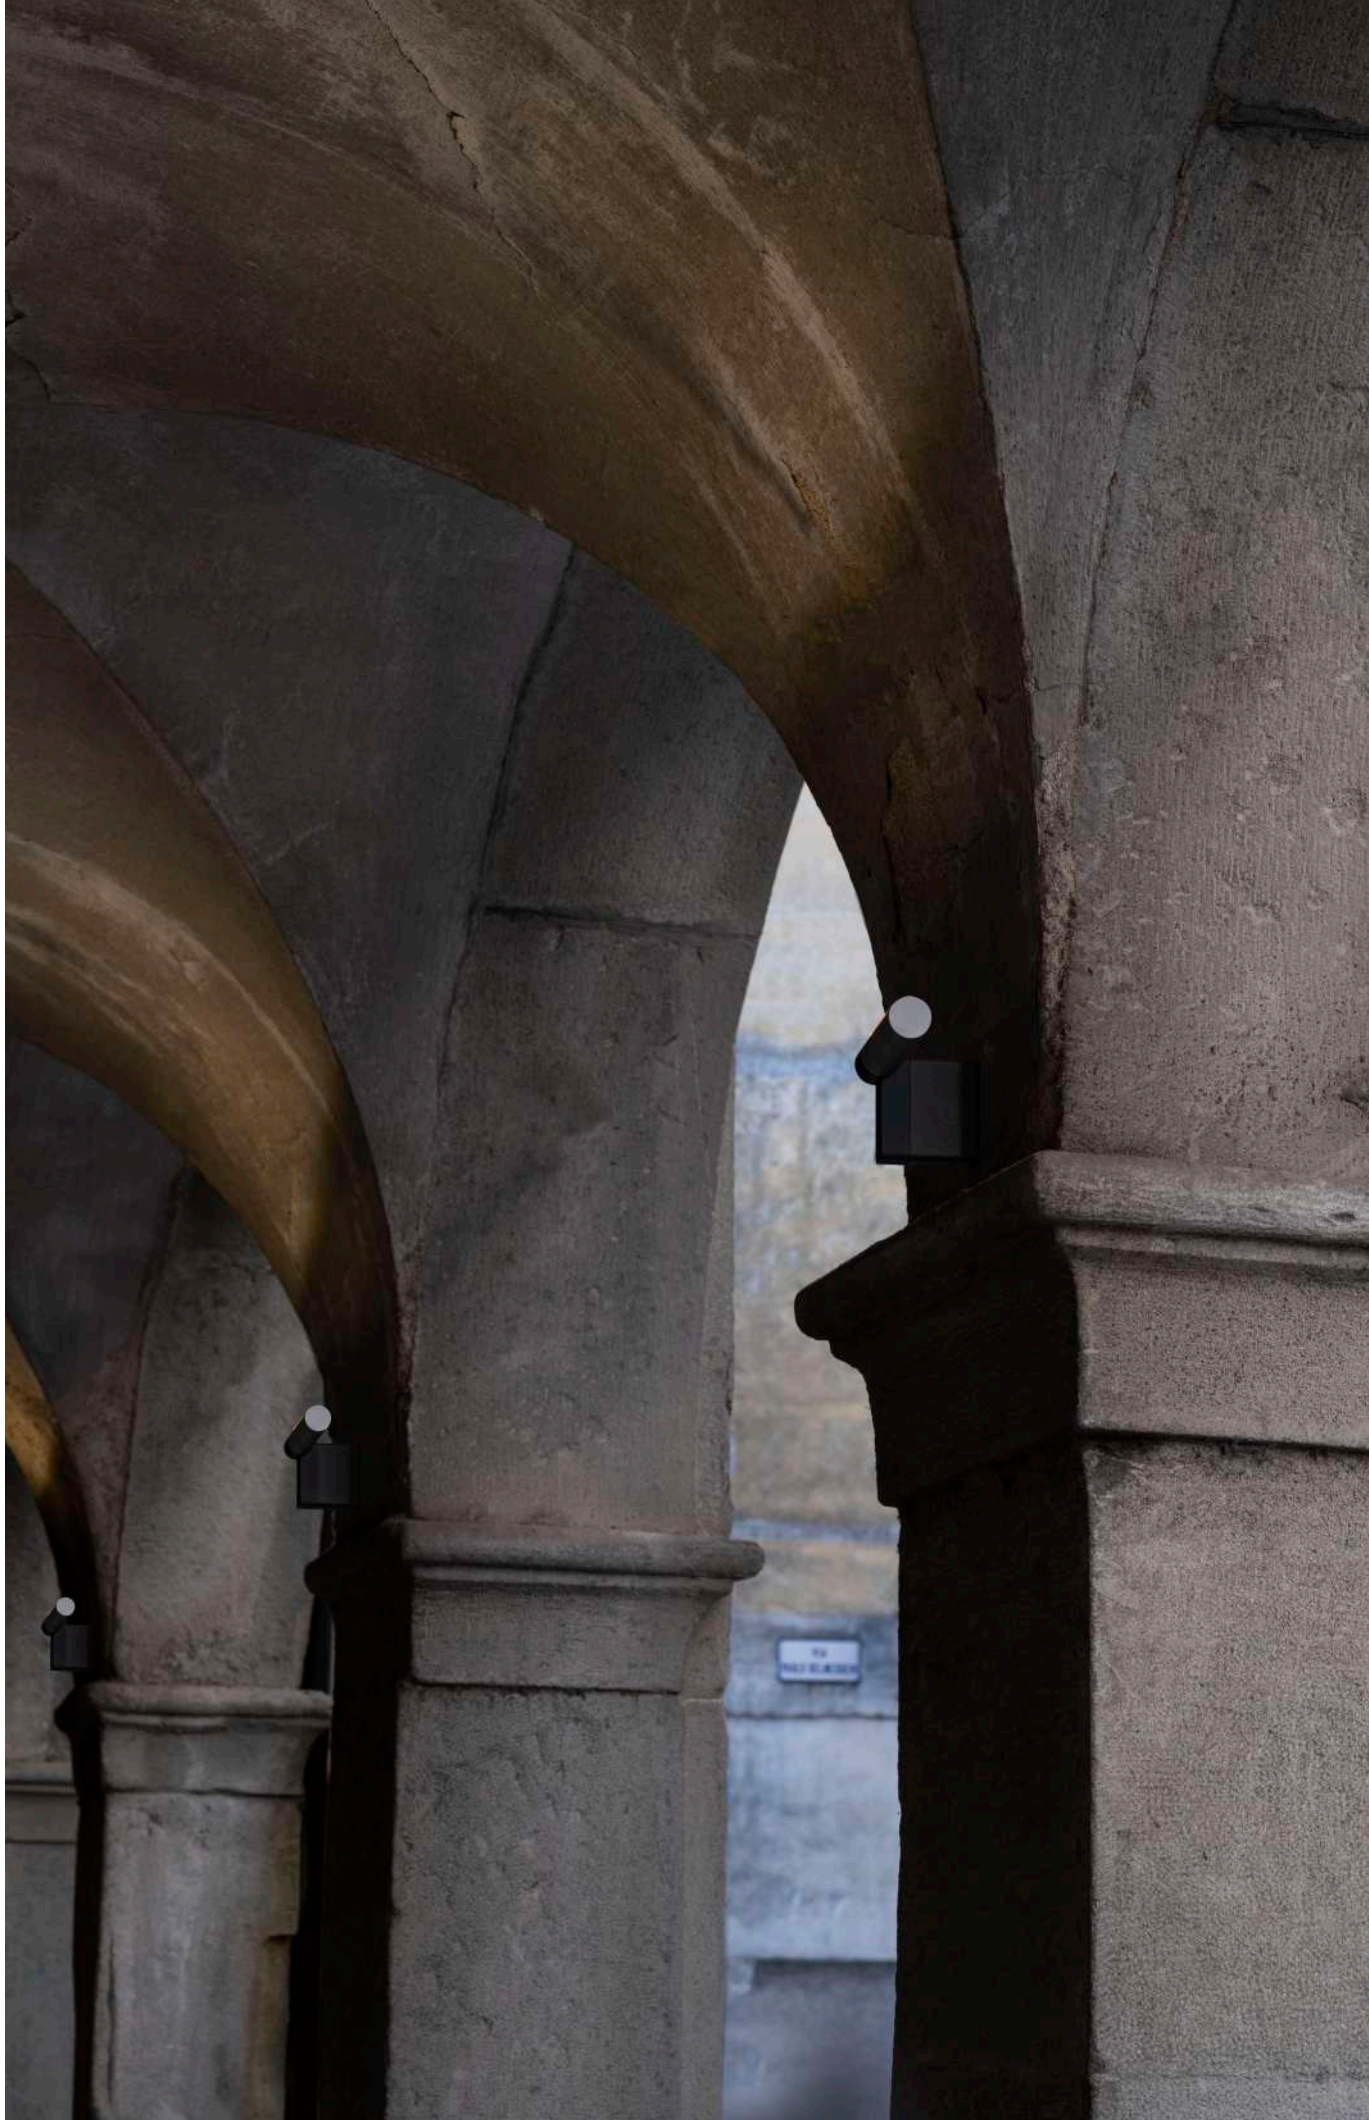





Muse Capsule Wall

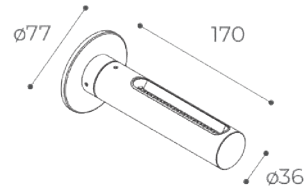

mono/double emission

Available finishes:

- black
- aluminium
- bronze
- olive green **on request*

SUPPORT ONLY:

- black

Light Source mid power led
Supply 24V
Dimmer PWM
CRI ≥80
Electrical Class III
IP rating 65
Application wall
Diffuser polyurethane opal resin

Power 24V 4Wled / 2x4Wled
Led Colour temp. 2700/2800K - 3000/3100K



			lm	black	aluminium	bronze
2700/2800K	24V					
4Wled-4We		mono emission	570	902032747	902032746	902032749
2x4Wled-2x4We		double emission	2x570	902032757	902032756	902032759


			lm	black	aluminium	bronze
3000/3100K	24V					
4Wled-4We		mono emission	600	902012747	902012746	902012749
2x4Wled-2x4We		double emission	2x600	902012757	902012756	902012759

The light colour of this fixture may shift by approximately ±150K due to the protective resin covering the leds.

La tonalità di colore è soggetta ad una variazione di ±150K dovuta all'applicazione di resina protettiva sui led.

Muse Capsule Bollard

h300 / h500 / h800

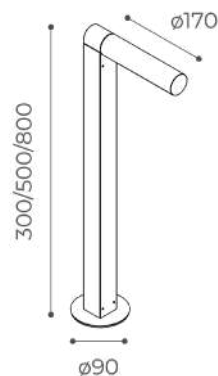

Available finishes:

- black
- aluminium
- bronze
- olive green **on request*

SUPPORT ONLY:

- black

Light Source mid power led
Supply 24V / 220-240V
Dimmer PWM
CRI ≥80
Electrical Class II, III
IP rating 65
Application ground
Diffuser polyurethane opal resin

Power 24V 4Wled
 220-240 4Wled 5We
Led Colour temp. 2700/2800K - 3000/3100K



h300

				lm	black	aluminium	bronze
2700/2800K							
4Wled-4We	24V	III	570	902032767	902032766	902032769	
4Wled 5,2We	220-240V	II	570	902031767	902031766	902031769	

				lm	black	aluminium	bronze
3000/3100K							
4Wled-4We	24V	III	600	902012767	902012766	902012769	
4Wled 5,2We	220-240V	II	600	902011767	902011766	902011769	

h500

				lm	black	aluminium	bronze
2700/2800K							
4Wled-4We	24V	III	570	902032777	902032776	902032779	
4Wled 5,2We	220-240V	II	570	902031777	902031776	902031779	

				lm	black	aluminium	bronze
3000/3100K							
4Wled-4We	24V	III	600	902012777	902012776	902012779	
4Wled 5,2We	220-240V	II	600	902011777	902011776	902011779	

h800


				lm	black	aluminium	bronze
2700/2800K							
4Wled-4We	24V	III	570	902032787	902032786	902032789	
4Wled 5,2We	220-240V	II	570	902031787	902031786	902031789	

				lm	black	aluminium	bronze
3000/3100K							
4Wled-4We	24V	III	600	902012787	902012786	902012789	
4Wled 5,2We	220-240V	II	600	902011787	902011786	902011789	



Muse Spot 01

small box

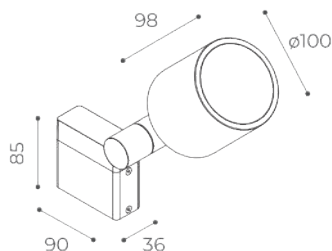

Available finishes:

- white
- sand
- aluminium
- black
- olive green **on request*

Light Source cob led
Supply 220-240V
CRI ≥80
Electrical Class II
IP rating 65
Application wall, ground, roof
Diffuser transparent tempered glass

Power 12Wled/15We
Led Colour temp. 2700/3000K




		lm		white	sand	aluminium	black	
2700K 12Wled 15We	220-240V	▲ 15°		with honeycomb	902031792	902031793	902031795	9020317911
		▲ 15°	1237	without honeycomb	902031802	902031803	902031805	9020318011
		▲ 26°		with honeycomb	902031812	902031813	902031815	9020318111
		▲ 26°	1182	without honeycomb	902031822	902031823	902031825	9020318211
		▲ 36°		with honeycomb	902031832	902031833	902031835	9020318311
		▲ 36°	1182	without honeycomb	902031842	902031843	902031845	9020318411
		▲ 60°	1098	without honeycomb	902031852	902031853	902031855	9020318511

		lm		white	sand	aluminium	black	
3000K 12Wled 15We	220-240V	▲ 15°		with honeycomb	902011792	902011793	902011795	9020137911
		▲ 15°	1288	without honeycomb	902011802	902011803	902011805	9020118011
		▲ 26°		with honeycomb	902011812	902011813	902011815	9020118111
		▲ 26°	1230	without honeycomb	902011822	902011823	902011825	9020118211
		▲ 36°		with honeycomb	902011832	902011833	902011835	9020118311
		▲ 36°	1230	without honeycomb	902011842	902011843	902011845	9020118411
		▲ 60°	1144	without honeycomb	902011852	902011853	902011855	9020118511



Muse Spot 01

big box

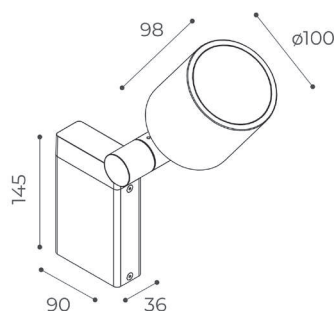

Available finishes:

- white
- sand
- aluminium
- black
- olive green **on request*

Light Source cob led
Supply 220-240V
Dimmer yes
CRI ≥80
Electrical Class II
IP rating 65
Application wall, ground, roof
Diffuser transparent tempered glass

Power 12Wled/15We
Led Colour temp. 2700/3000K




		lm		white	sand	aluminium	black
2700K 12Wled 15We Dali	220-240V	▲ 15°	with honeycomb	902036792	902036793	902036795	9020367911
			without honeycomb	902036802	902036803	902036805	9020368011
		▲ 26°	with honeycomb	902036812	902036813	902036815	9020368111
			without honeycomb	902036822	902036823	902036825	902036811
		▲ 36°	with honeycomb	902036832	902036833	902036835	9020368311
			without honeycomb	902036842	902036843	902036845	9020368411
▲ 60°	without honeycomb	902036852	902036853	902036855	9020368511		

		lm		white	sand	aluminium	black
3000K 12Wled 15We Dali	220-240V	▲ 15°	with honeycomb	902016792	902016793	902016795	9020167911
			without honeycomb	902016802	902016803	902016805	9020168011
		▲ 26°	with honeycomb	902016812	902016813	902016815	9020168111
			without honeycomb	902016822	902016823	902016825	902016811
		▲ 36°	with honeycomb	902016832	902016833	902016835	9020168311
			without honeycomb	902016842	902016843	902016845	9020168411
▲ 60°	without honeycomb	902016852	902016853	902016855	9020168511		



Muse Spot 01 Bollard

h300

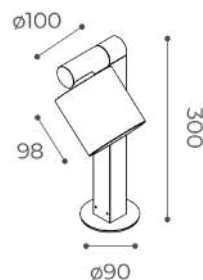

Available finishes:


- white
- sand
- aluminium
- black
- olive green **on request*

SUPPORT ONLY:

- black

Light Source cob led
Supply 220-240V
CRI ≥80
Electrical Class II
IP rating 65
Application ground
Diffuser transparent tempered glass

Power 12Wled/15We
Led Colour temp. 2700/3000K




		lm		white	sand	aluminium	black	
2700K 12Wled 15We	220-240V	▲ 15°		with honeycomb	902031862	902031863	902031865	9020318611
		▲ 15°	1237	without honeycomb	902031872	902031873	902031875	9020318711
		▲ 26°		with honeycomb	902031882	902031883	902031885	9020318811
		▲ 26°	1182	without honeycomb	902031892	902031893	902031895	9020318911
		▲ 36°		with honeycomb	902031902	902031903	902031905	9020319011
		▲ 36°	1182	without honeycomb	902031912	902031913	902031915	9020319111
		▲ 60°	1098	without honeycomb	902031922	902031923	902031925	9020319211

		lm		white	sand	aluminium	black	
3000K 12Wled 15We	220-240V	▲ 15°		with honeycomb	902011862	902011863	902011865	9020118611
		▲ 15°	1288	without honeycomb	902011872	902011873	902011875	9020118711
		▲ 26°		with honeycomb	902011882	902011883	902011885	9020118811
		▲ 26°	1230	without honeycomb	902011892	902011893	902011895	9020118911
		▲ 36°		with honeycomb	902011902	902011903	902011905	9020119011
		▲ 36°	1230	without honeycomb	902011912	902011913	902011915	9020119111
		▲ 60°	1144	without honeycomb	902011922	902011923	902011925	9020119211

Muse Spot 01 Bollard

h500

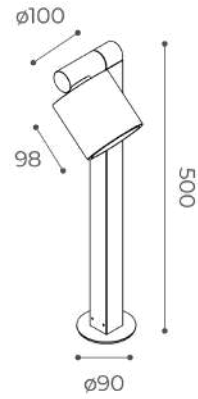

Available finishes:


- white
- sand
- aluminium
- black
- olive green **on request*

SUPPORT ONLY:

- black

Light Source cob led
Supply 220-240V
CRI ≥80
Electrical Class II
IP rating 65
Application ground
Diffuser transparent tempered glass

Power 12Wled/15We
Led Colour temp. 2700/3000K




		lm			white	sand	aluminium	black
2700K 12Wled 15We	220-240V	▲ 15°		with honeycomb	902031932	902031933	902031935	9020319311
		▲ 15°	1237	without honeycomb	902031942	902031943	902031945	9020319411
		▲ 26°		with honeycomb	902031952	902031953	902031955	9020319511
		▲ 26°	1182	without honeycomb	902031962	902031963	902031965	9020319611
		▲ 36°		with honeycomb	902031972	902031973	902031975	9020319711
		▲ 36°	1182	without honeycomb	902031982	902031983	902031985	9020319811
		▲ 60°	1098	without honeycomb	902031992	902031993	902031995	9020319911

		lm			white	sand	aluminium	black
3000K 12Wled 15We	220-240V	▲ 15°		with honeycomb	902011932	902011933	902011935	9020119311
		▲ 15°	1288	without honeycomb	902011942	902011943	902011945	9020119411
		▲ 26°		with honeycomb	902011952	902011953	902011955	9020119511
		▲ 26°	1230	without honeycomb	902011962	902011963	902011965	9020119611
		▲ 36°		with honeycomb	902011972	902011973	902011975	9020119711
		▲ 36°	1230	without honeycomb	902011982	902011983	902011985	9020119811
		▲ 60°	1144	without honeycomb	902011992	902011993	902011995	9020119911

Muse Spot 01 Bollard

h800

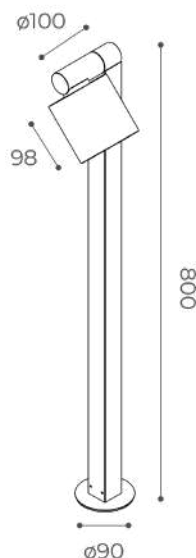

Available finishes:


- white
- sand
- aluminium
- black
- olive green **on request*

SUPPORT ONLY:

- black


Light Source cob led
Supply 220-240V
CRI ≥80
Electrical Class II
IP rating 65
Application ground
Diffuser transparent tempered glass

Power 12Wled/15We
Led Colour temp. 2700/3000K



		lm			white	sand	aluminium	black
2700K 12Wled 15We	220-240V	▲ 15°		with honeycomb	9020311002	9020311003	9020311005	90203110011
		▲ 15°	1237	without honeycomb	9020311012	9020311013	9020311015	90203110111
		▲ 26°		with honeycomb	9020311022	9020311023	9020311025	90203110211
		▲ 26°	1182	without honeycomb	9020311032	9020311033	9020311035	90203110311
		▲ 36°		with honeycomb	9020311042	9020311043	9020311045	90203110411
		▲ 36°	1182	without honeycomb	9020311052	9020311053	9020311055	90203110511
		▲ 60°	1098	without honeycomb	9020311062	9020311063	9020311065	90203110611

		lm			white	sand	aluminium	black
3000K 12Wled 15We	220-240V	▲ 15°		with honeycomb	9020111002	9020111003	9020111005	90201110011
		▲ 15°	1288	without honeycomb	9020111012	9020111013	9020111015	90201110111
		▲ 26°		with honeycomb	9020111022	9020111023	9020111025	90201110211
		▲ 26°	1230	without honeycomb	9020111032	9020111033	9020111035	90201110311
		▲ 36°		with honeycomb	9020111042	9020111043	9020111045	90201110411
		▲ 36°	1230	without honeycomb	9020111052	9020111053	9020111055	90201110511
		▲ 60°	1144	without honeycomb	9020111062	9020111063	9020111065	90201110611

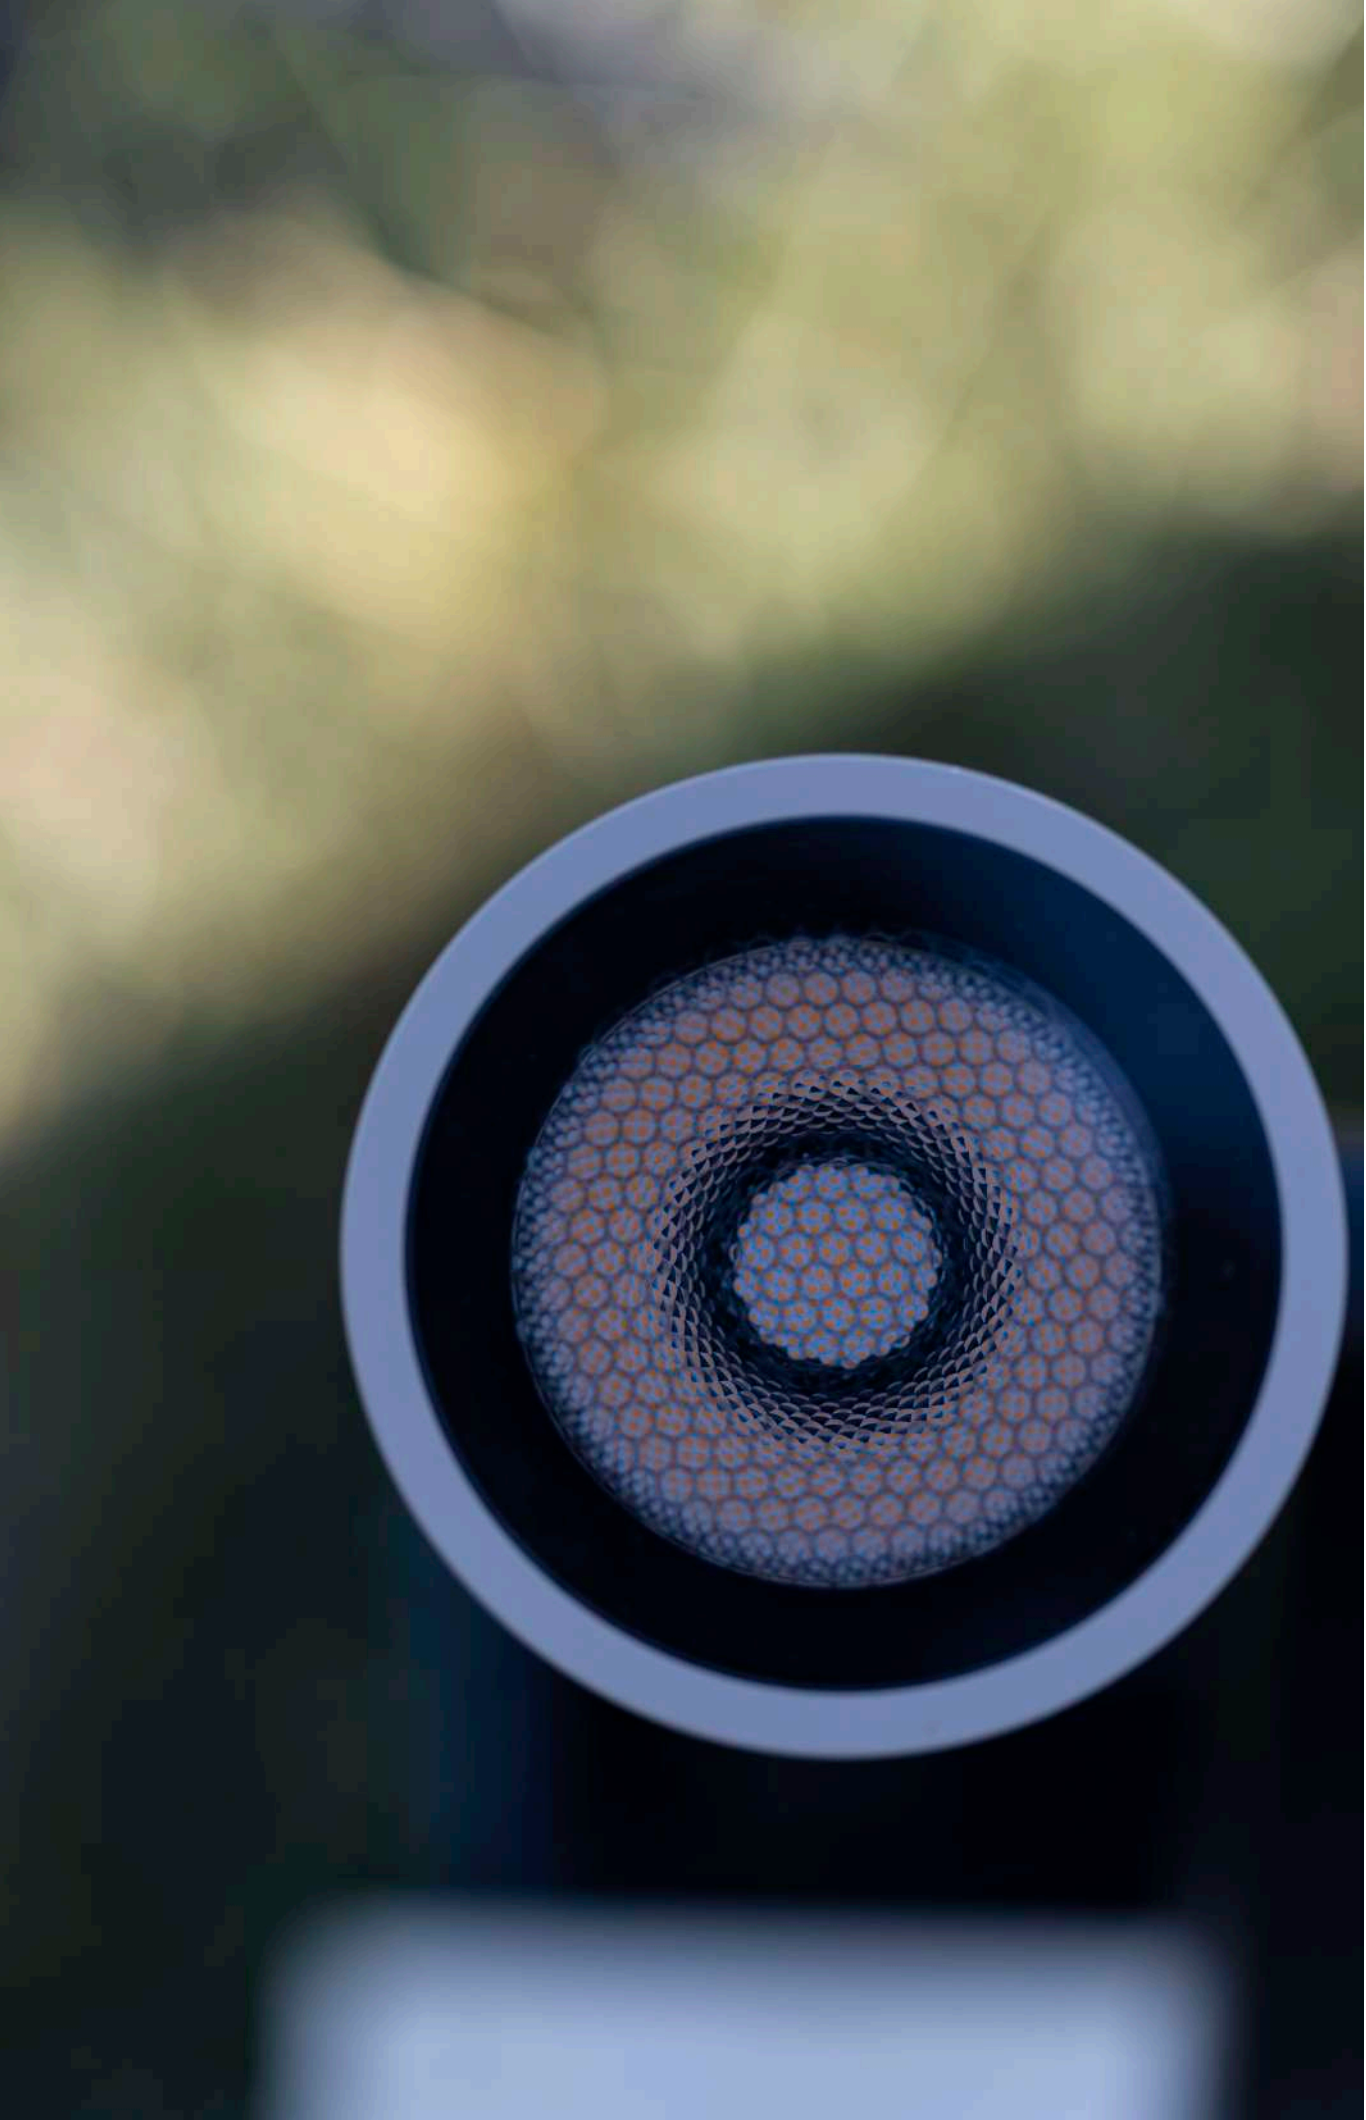






Muse Turn Box

Spot 02

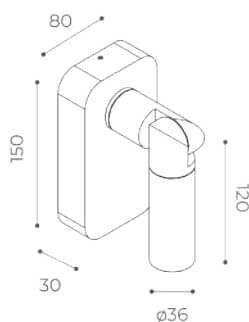

Available finishes:



Light Source power led
Supply 220-240V
CRI ≥80
Electrical Class II
IP rating 65
Application wall, ground, roof
Diffuser transparent tempered glass

Power 220-240V 2Wled - 2,8We
Led Colour temp. 2700/3000K




				lm	black	
2700K 2Wled 2,8We	220-240V	▲ 18°	98	with honeycomb	9020311111	
		▲ 18°	103	without honeycomb	9020311211	
		▲ 36°	74	with honeycomb	9020311311	
		▲ 36°	222	without honeycomb	9020311411	
				lm	black	
3000K 2Wled 2,8We	220-240V	▲ 18°	103	with honeycomb	9020111111	
		▲ 18°	178	without honeycomb	9020111211	
		▲ 36°	78	with honeycomb	9020111311	
		▲ 36°	234	without honeycomb	9020111411	



Muse Turn Box

Spot 03

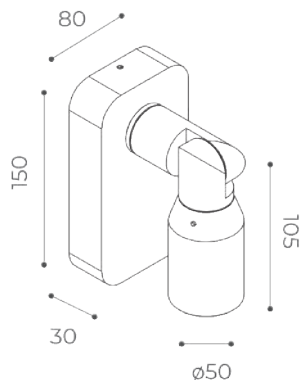


Available finishes:

- black
- olive green **on request*

Light Source power led
Supply 220-240V
CRI ≥80
Electrical Class II
IP rating 65
Application wall, ground, roof
Diffuser transparent tempered glass


Power 220-240V 5,8Wled - 8,6We
Led Colour temp. 2700/3000K



				lm	black
2700K 5,8Wled 8,6We	220-240V	10° ▲	with honeycomb	243	90203110711
		10° ▲	without honeycomb	405	90203110811
		26° ▲	with honeycomb	251	9020311511
		26° ▲	without honeycomb	432	9020311611
		52° ▲	with honeycomb	135	9020311711
		52° ▲	without honeycomb	409	9020311811

				lm	black
3000K 5,8Wled 8,6We	220-240V	10° ▲	with honeycomb	253	90201110711
		10° ▲	without honeycomb	422	90201110811
		26° ▲	with honeycomb	264	9020111511
		26° ▲	without honeycomb	455	9020111611
		52° ▲	with honeycomb	142	9020111711
		52° ▲	without honeycomb	431	9020111811




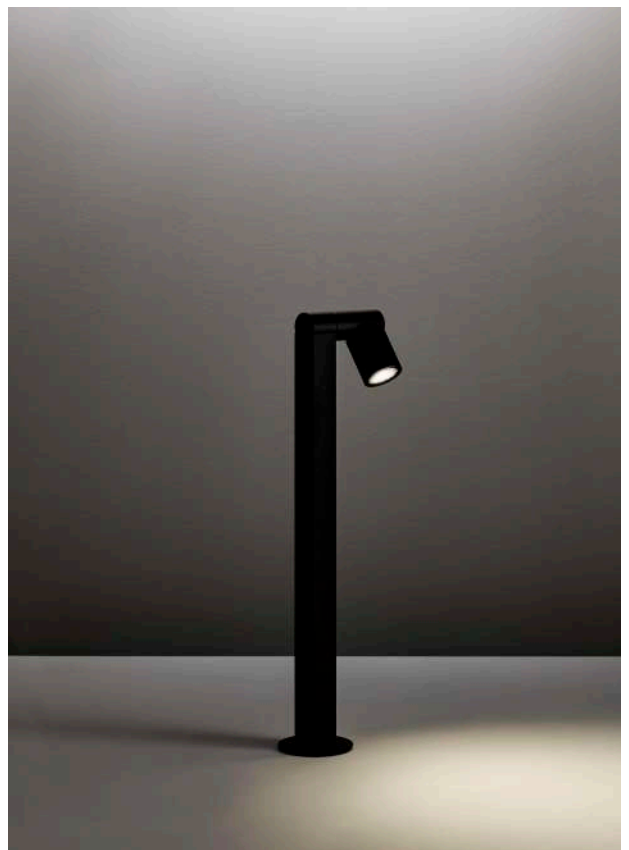



Muse Spot 04

bollard h300

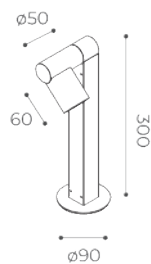

Available finishes:

- black
- olive green **on request*

Light Source power led
Supply 24V / 220-240V
Dimmer only 24V (PWM)
CRI ≥80
Electrical Class II, III
IP rating 65
Application ground
Diffuser transparent tempered glass


Power 24V 5,8Wled - 6,3We
 220-240V 5,8Wled - 8,6We
Led Colour temp. 2700/3000K



				lm		black	
2700K 5,8Wled 8,6We	220-240V	II	▲ 10°	243	with honeycomb	90203110911	
			▲ 10°	405	without honeycomb	90203111011	
			▲ 26°	251	with honeycomb	9020311911	
			▲ 26°	432	without honeycomb	9020312011	
			▲ 52°	135	with honeycomb	9020312111	
			▲ 52°	409	without honeycomb	9020312211	
				lm		black	
2700K 5,8Wled 6,3We	24V	III	▲ 10°	243	with honeycomb	90203210911	
			▲ 10°	405	without honeycomb	90203211011	
			▲ 26°	251	with honeycomb	9020321911	
			▲ 26°	432	without honeycomb	9020322011	
			▲ 52°	135	with honeycomb	9020322111	
			▲ 52°	409	without honeycomb	9020322211	
				lm		black	
3000K 5,8Wled 8,6We	220-240V	II	▲ 10°	253	with honeycomb	90201110911	
			▲ 10°	422	without honeycomb	90201111011	
			▲ 26°	264	with honeycomb	9020111911	
			▲ 26°	455	without honeycomb	9020112011	
			▲ 52°	142	with honeycomb	9020112111	
			▲ 52°	431	without honeycomb	9020112211	
				lm		black	
3000K 5,8Wled 6,3We	24V	III	▲ 10°	253	with honeycomb	90201210911	
			▲ 10°	422	without honeycomb	90201211011	
			▲ 26°	264	with honeycomb	9020121911	
			▲ 26°	455	without honeycomb	9020122011	
			▲ 52°	142	with honeycomb	9020122111	
			▲ 52°	431	without honeycomb	9020122211	

Muse Spot 04

bollard h500

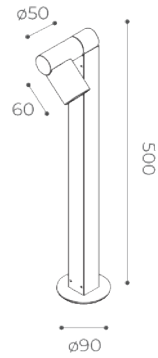

Available finishes:

- black
- olive green **on request*

Light Source power led
Supply 24V / 220-240V
Dimmer only 24V (PWM)
CRI ≥80
Electrical Class II, III
IP rating 65
Application ground
Diffuser transparent tempered glass


Power 24V 5,8Wled - 6,3We
 220-240V 5,8Wled - 8,6We
Led Colour temp. 2700/3000K



				lm		black	
2700K 5,8Wled 8,6We	220-240V	II	▲ 10°	243	with honeycomb	9020311111	
			▲ 10°	405	without honeycomb	9020311121	
			▲ 26°	251	with honeycomb	9020312311	
			▲ 26°	432	without honeycomb	9020312411	
			▲ 52°	135	with honeycomb	9020312511	
			▲ 52°	409	without honeycomb	9020312611	
				lm		black	
2700K 5,8Wled 6,3We	24V	III	▲ 10°	243	with honeycomb	9020321111	
			▲ 10°	405	without honeycomb	9020321121	
			▲ 26°	251	with honeycomb	9020322311	
			▲ 26°	432	without honeycomb	9020322411	
			▲ 52°	135	with honeycomb	9020322511	
			▲ 52°	409	without honeycomb	9020322611	
				lm		black	
3000K 5,8Wled 8,6We	220-240V	II	▲ 10°	253	with honeycomb	9020111111	
			▲ 10°	422	without honeycomb	9020111121	
			▲ 26°	264	with honeycomb	9020112311	
			▲ 26°	455	without honeycomb	9020112411	
			▲ 52°	142	with honeycomb	9020112511	
			▲ 52°	431	without honeycomb	9020112611	
				lm		black	
3000K 5,8Wled 6,3We	24V	III	▲ 10°	253	with honeycomb	9020121111	
			▲ 10°	422	without honeycomb	9020121121	
			▲ 26°	264	with honeycomb	9020122311	
			▲ 26°	455	without honeycomb	9020122411	
			▲ 52°	142	with honeycomb	9020122511	
			▲ 52°	431	without honeycomb	9020122611	

Muse Spot 04

bollard h800

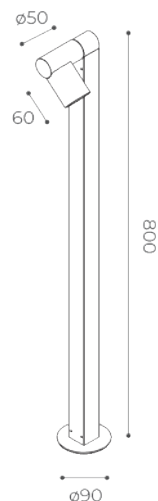

Available finishes:

- black
- olive green **on request*


Light Source power led
Supply 24V / 220-240V
Dimmer only 24V (PWM)
CRI ≥80
Electrical Class II, III
IP rating 65
Application ground
Diffuser transparent tempered glass

Power 24V 5,8Wled- 6,3We
 220-240V 5,8Wled - 8,6We
Led Colour temp. 2700/3000K




				lm		black	
2700K 5,8Wled 8,6We	220-240V	II	▲ 10°	243	with honeycomb	90203111311	
			▲ 10°	405	without honeycomb	90203111411	
			▲ 26°	251	with honeycomb	9020312711	
			▲ 26°	432	without honeycomb	9020312811	
			▲ 52°	135	with honeycomb	9020312911	
			▲ 52°	409	without honeycomb	9020313011	
				lm		black	
2700K 5,8Wled 6,3We	24V	III	▲ 10°	243	with honeycomb	90203211311	
			▲ 10°	405	without honeycomb	90203211411	
			▲ 26°	251	with honeycomb	9020322711	
			▲ 26°	432	without honeycomb	9020322811	
			▲ 52°	135	with honeycomb	9020322911	
			▲ 52°	409	without honeycomb	9020323011	
				lm		black	
3000K 5,8Wled 8,6We	220-240V	II	▲ 10°	253	with honeycomb	90201111311	
			▲ 10°	422	without honeycomb	90201111411	
			▲ 26°	264	with honeycomb	9020112711	
			▲ 26°	455	without honeycomb	9020112811	
			▲ 52°	142	with honeycomb	9020112911	
			▲ 52°	431	without honeycomb	9020113011	
				lm		black	
3000K 5,8Wled 6,3We	24V	III	▲ 10°	253	with honeycomb	90201211311	
			▲ 10°	422	without honeycomb	90201211411	
			▲ 26°	264	with honeycomb	9020122711	
			▲ 26°	455	without honeycomb	9020122811	
			▲ 52°	142	with honeycomb	9020122911	
			▲ 52°	431	without honeycomb	9020123011	



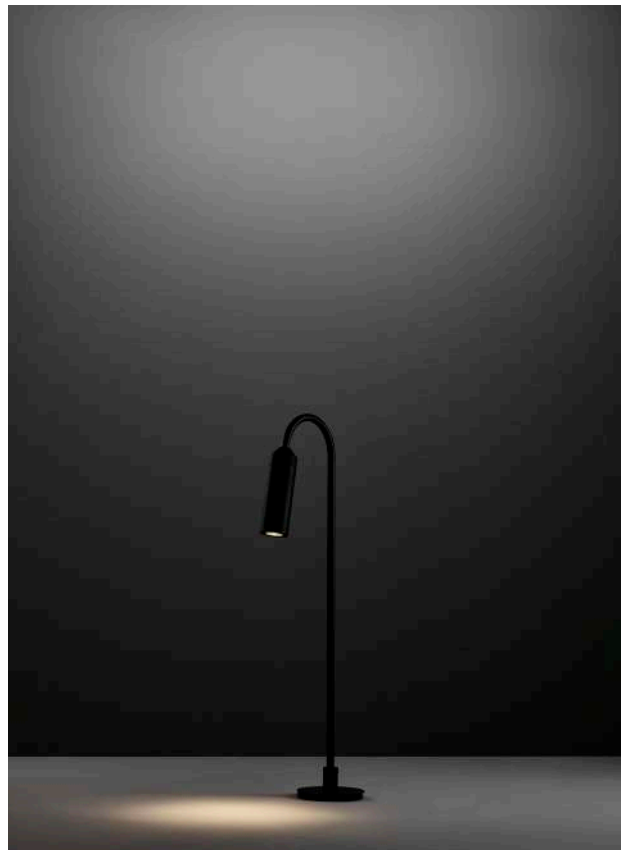


Muse Spot 02 Bend-Shape Stem

h500

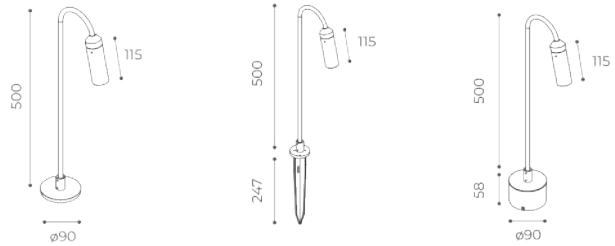

Available finishes:



Light Source power led
Supply 24V / 220-240V
Dimmer only 24V (PWM)
CRI ≥80
Electrical Class II, III
IP rating 65
Application ground
Diffuser transparent tempered glass

Power 24V 2Wled- 3We
 220-240V 2Wled - 2,8We
Led Colour temp. 2700/3000K



WITH BASE

				lm		black		green	
2700K 2Wled 3We	24V	III	▲	18°	98	with honeycomb	9020323111	9020323116	
				18°	169	without honeycomb	9020323211	9020323216	
				36°	75	with honeycomb	9020323511	9020323516	
				36°	224	without honeycomb	9020323611	9020323616	

				lm		black		green	
2700K 2Wled 2,8We	220-240V	II	▲	18°	98	with honeycomb	9020313111	9020313116	
				18°	169	without honeycomb	9020313211	9020313216	
				36°	75	with honeycomb	9020313511	9020313516	
				36°	224	without honeycomb	9020313611	9020313616	

				lm		black		green	
3000K 2Wled 3We	24V	III	▲	18°	103	with honeycomb	9020123111	9020123116	
				18°	178	without honeycomb	9020123211	9020123216	
				36°	79	with honeycomb	9020123511	9020123516	
				36°	236	without honeycomb	9020123611	9020123616	

				lm		black		green	
3000K 2Wled 2,8We	220-240V	II	▲	18°	103	with honeycomb	9020113111	9020113116	
				18°	178	without honeycomb	9020113211	9020113216	
				36°	79	with honeycomb	9020113511	9020113516	
				36°	236	without honeycomb	9020113611	9020113616	


WITH SPIKE

				lm		black		green	
2700K 2Wled 3We	24V	III	▲	18°	98	with honeycomb	9020323311	9020323316	
				18°	169	without honeycomb	9020323411	9020323416	
				36°	75	with honeycomb	9020323711	9020323716	
				36°	224	without honeycomb	9020323811	9020323816	


				lm		black		green	
3000K 2Wled 3We	24V	III	▲	18°	103	with honeycomb	9020123311	9020123316	
				18°	178	without honeycomb	9020123411	9020123416	
				36°	79	with honeycomb	9020123711	9020123716	
				36°	236	without honeycomb	9020123811	9020123816	

Muse Spot 02 Bend-Shape Stem

h800

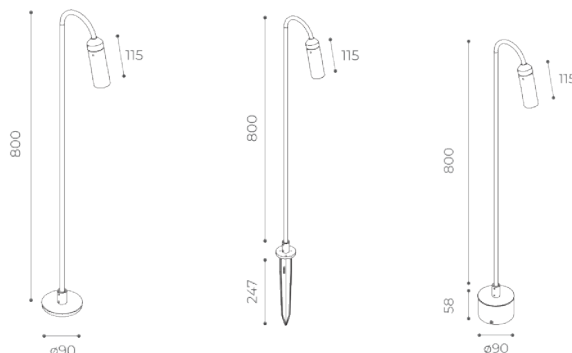

Available finishes:



Light Source power led
Supply 24V / 220-240V
Dimmer only 24V (PWM)
CRI ≥80
Electrical Class II, III
IP rating 65
Application ground
Diffuser transparent tempered glass

Power 24V 2Wled- 3We
 220-240V 2Wled - We
Led Colour temp. 2700/3000K



WITH BASE

					lm		black	green
2700K 2Wled 3We	24V	III	18°	98	with honeycomb	9020323911	9020323916	
			18°	169	without honeycomb	9020324011	9020324016	
			36°	75	with honeycomb	9020324311	9020324316	
			36°	224	without honeycomb	9020324411	9020324416	

					lm		black	green
2700K 2Wled 2,8We	220-240V	II	18°	98	with honeycomb	9020313911	9020313916	
			18°	169	without honeycomb	9020314011	9020314016	
			36°	75	with honeycomb	9020314311	9020314316	
			36°	224	without honeycomb	9020314411	9020314416	

					lm		black	green
3000K 2Wled 3We	24V	III	18°	103	with honeycomb	9020123911	9020123916	
			18°	178	without honeycomb	9020124011	9020124016	
			36°	79	with honeycomb	9020124311	9020124316	
			36°	236	without honeycomb	9020124411	9020124416	

					lm		black	green
3000K 2Wled 2,8We	220-240V	II	18°	103	with honeycomb	9020113911	9020113916	
			18°	178	without honeycomb	9020114011	9020114016	
			36°	79	with honeycomb	9020114311	9020114316	
			36°	236	without honeycomb	9020114411	9020114416	


WITH SPIKE

					lm		black	green
2700K 2Wled 3We	24V	III	18°	98	with honeycomb	9020324111	9020324116	
			18°	169	without honeycomb	9020324211	9020324216	
			36°	75	with honeycomb	9020324511	9020324516	
			36°	224	without honeycomb	9020324611	9020324616	


					lm		black	green
3000K 2Wled 3We	24V	III	18°	103	with honeycomb	9020124111	9020124116	
			18°	178	without honeycomb	9020124211	9020124216	
			36°	79	with honeycomb	9020124511	9020124516	
			36°	236	without honeycomb	9020124611	9020124616	

Muse Spot 03 Bend-Shape Stem

h500

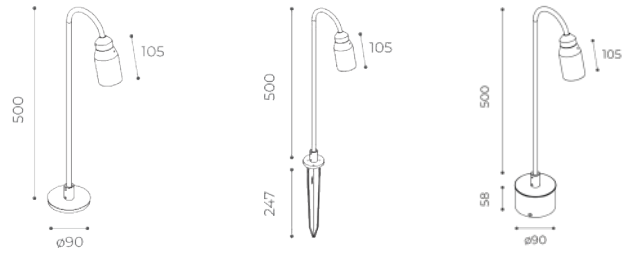

Available finishes:



Light Source power led
Supply 24V / 220-240V
Dimmer only 24V (PWM)
CRI ≥80
Electrical Class II, III
IP rating 65
Application ground
Diffuser transparent tempered glass

Power 24V 5,8Wled- 6,3We
 220-240V 5,8Wled - 8,6We
Led Colour temp. 2700/3000K



WITH BASE


					lm		black	green
2700K 5,8Wled 6,3We	24V	III	▲ 10°	243	with honeycomb	90203211511	9020321516	
			▲ 10°	405	without honeycomb	90203211611	9020321616	
			▲ 26°	251	with honeycomb	9020324711	9020324716	
			▲ 26°	432	without honeycomb	9020324811	9020324816	
			▲ 52°	135	with honeycomb	9020325111	9020325116	
			▲ 52°	409	without honeycomb	9020325211	9020325216	
2700K 5,8Wled 6,3We	220-240V	II	▲ 10°	243	with honeycomb	90203111511	90203111516	
			▲ 10°	405	without honeycomb	90203111611	90203111616	
			▲ 26°	251	with honeycomb	9020314711	9020314716	
			▲ 26°	432	without honeycomb	9020314811	9020314816	
			▲ 52°	135	with honeycomb	9020315111	9020315116	
			▲ 52°	409	without honeycomb	9020315211	9020315216	
3000K 5,8Wled 6,3We	24V	III	▲ 10°	253	with honeycomb	90201211511	9020121516	
			▲ 10°	422	without honeycomb	90201211611	9020121616	
			▲ 26°	264	with honeycomb	9020124711	9020124716	
			▲ 26°	455	without honeycomb	9020124811	9020124816	
			▲ 52°	142	with honeycomb	9020125111	9020125116	
			▲ 52°	431	without honeycomb	9020125211	9020125216	
3000K 5,8Wled 6,3We	220-240V	II	▲ 10°	253	with honeycomb	90201111511	90201111516	
			▲ 10°	422	without honeycomb	90201111611	90201111616	
			▲ 26°	264	with honeycomb	9020114711	9020114716	
			▲ 26°	455	without honeycomb	9020114811	9020114816	
			▲ 52°	142	with honeycomb	9020115111	9020115116	
			▲ 52°	431	without honeycomb	9020115211	9020115216	

WITH SPIKE


					lm		black	green
2700K 5,8Wled 6,3We	24V	III	▲ 10°	243	with honeycomb	90203211711	90203211716	
			▲ 10°	405	without honeycomb	90203211811	90203211816	
			▲ 26°	251	with honeycomb	9020324911	9020324916	
			▲ 26°	432	without honeycomb	9020325011	9020325016	
			▲ 52°	135	with honeycomb	9020325311	9020325316	
			▲ 52°	409	without honeycomb	9020325411	9020325416	
3000K 5,8Wled 6,3We	24V	II	▲ 10°	253	with honeycomb	90201211711	90201211716	
			▲ 10°	422	without honeycomb	90201211811	90201211816	
			▲ 26°	264	with honeycomb	9020124911	9020124916	
			▲ 26°	455	without honeycomb	9020125011	9020125016	
			▲ 52°	142	with honeycomb	9020125311	9020125316	
			▲ 52°	431	without honeycomb	9020125411	9020125416	

Muse Spot 03 Bend-Shape Stem

h800

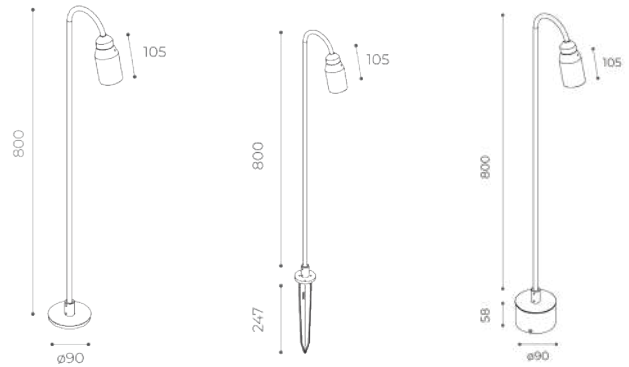

Available finishes:



Light Source power led
Supply 24V / 220-240V
Dimmer only 24V (PWM)
CRI ≥80
Electrical Class II, III
IP rating 65
Application ground
Diffuser transparent tempered glass

Power 24V 5,8Wled - 6,3We
 220-240V 5,8Wled - 8,6We
Led Colour temp. 2700/3000K



WITH BASE


					lm		black	green
2700K 5,8Wled 6,3We	24V	III	▲ 10°	243	with honeycomb	90203211911	90203211916	
			▲ 10°	405	without honeycomb	90203212011	90203212016	
			▲ 26°	251	with honeycomb	9020325511	9020325516	
			▲ 26°	432	without honeycomb	9020325611	9020325616	
			▲ 52°	135	with honeycomb	9020325911	9020325916	
			▲ 52°	409	without honeycomb	9020326011	9020326016	
2700K 5,8Wled 6,3We	220-240V	II	▲ 10°	243	with honeycomb	90203111911	90203111916	
			▲ 10°	405	without honeycomb	90203112011	90203112016	
			▲ 26°	251	with honeycomb	9020315511	9020315516	
			▲ 26°	432	without honeycomb	9020315611	9020315616	
			▲ 52°	135	with honeycomb	9020315911	9020315916	
			▲ 52°	409	without honeycomb	9020316011	9020316016	
3000K 5,8Wled 6,3We	24V	III	▲ 10°	253	with honeycomb	90201211911	90201211916	
			▲ 10°	422	without honeycomb	90201212011	90201212016	
			▲ 26°	264	with honeycomb	9020125511	9020125516	
			▲ 26°	455	without honeycomb	9020125611	9020125616	
			▲ 52°	142	with honeycomb	9020125911	9020125916	
			▲ 52°	431	without honeycomb	9020126011	9020126016	
3000K 5,8Wled 6,3We	220-240V	II	▲ 10°	253	with honeycomb	90201111911	90201111916	
			▲ 10°	422	without honeycomb	90201112011	90201112016	
			▲ 26°	264	with honeycomb	9020115511	9020115516	
			▲ 26°	455	without honeycomb	9020115611	9020115616	
			▲ 52°	142	with honeycomb	9020115911	9020115916	
			▲ 52°	431	without honeycomb	9020116011	9020116016	

WITH SPIKE

					lm		black	green
2700K 5,8Wled 6,3We	24V	III	▲ 10°	243	with honeycomb	90203212111	90203212116	
			▲ 10°	405	without honeycomb	90203212211	90203212216	
			▲ 26°	251	with honeycomb	9020315711	9020315716	
			▲ 26°	432	without honeycomb	9020325811	9020325816	
			▲ 52°	135	with honeycomb	9020326111	9020326116	
			▲ 52°	409	without honeycomb	9020326211	9020326216	
3000K 5,8Wled 6,3We	24V	III	▲ 10°	253	with honeycomb	90201212111	90201212116	
			▲ 10°	422	without honeycomb	90201212211	90201212216	
			▲ 26°	264	with honeycomb	9020125711	9020125716	
			▲ 26°	455	without honeycomb	9020125811	9020125816	
			▲ 52°	142	with honeycomb	9020126111	9020126116	
			▲ 52°	431	without honeycomb	9020126211	9020126216	




ACCESSORIES




Power supply 8V 110-2240V IP54
44x46x26mm

code **9037**




Power supply 24V DC 70W IP67
267x79x52mm

code **9049**




Power supply 24V 16Watt IP20
118x52x26mm

code **9006**




Power supply 24V DC 150W IP67
267x79x52mm

code **9057**




Power supply 24V 20Watt IP20
103x67x21mm

code **9007**



Anchor bolts
Ø88x165mm

code **9062**



Power supply 24V 50Watt IP20
190x60x36mm

code **9008**

ACCESSORIES:

code **9037 / 9006 / 9007 / 9008 / 9049 / 9057 / 9062**



Tree Spot

LIGHT ON A TREE

The alternative to the traditional outdoor installation is the Tree Spot product, a spotlight offered in three different versions, both in terms of size and power.

The models are equipped with a specific mounting base and strap.

The structure is made of machined aluminum, treated with a cathoresis bath, and coated with polyester powder paint. It features tempered glass that is glued and screen-printed, fixed using robotic technology and silicone adhesive to ensure the IP rating.

All versions are equipped with Power LED and CoB LED in 3000K and 2700K colors.


The power supply is 24V via a standard IP connector; any additional cables should be ordered separately, as well as power supplies and junction boxes

L'alternativa alla classica installazione per esterni è il prodotto Tree Spot, proiettore offerto in tre versioni differenti sia per le dimensioni che per la potenza.


I modelli sono dotati di specifica basetta di fissaggio e cinghia.

Struttura in alluminio tornito, trattato con bagno di cataforesi e verniciato con polvere poliestere, vetro temprato incollato serigrafato, fissato con tecnologia robotica e collante siliconico per garantirne la tenuta IP; tutti equipaggiati da power Led e CoB Led in colorazione 3000K e 2700K.

L'alimentazione è a 24V tramite connettore IP di serie; eventuali cavi accessori sono da ordinare separatamente, come gli alimentatori e scatole di derivazione.

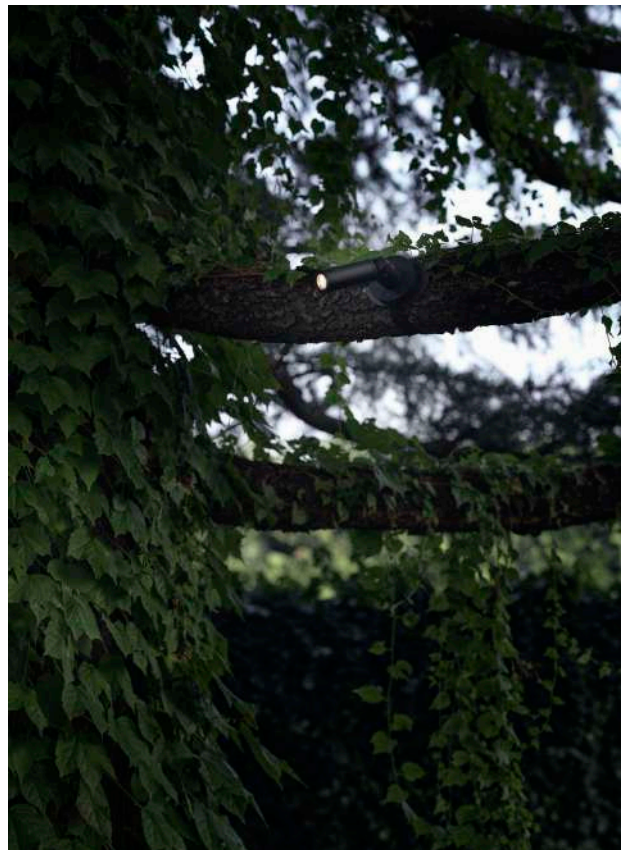

Tree Spot 02



strap length l 1000mm

Available finishes:

- black
- olive green **on request*

Light Source power led
Supply 24V
Dimmer PWM
CRI ≥80
Electrical Class III
IP rating 65
Application tree
Diffuser transparent tempered glass

Power 24V 2Wled- 3We
Led Colour temp. 2700/3000K




				lm	black
2700K 2Wled 3 We	24V	18° ▲	with honeycomb	98	9026320011
		18° ▲	without honeycomb	103	9026320111
		36° ▲	with honeycomb	74	9026320211
		36° ▲	without honeycomb	222	9026320311

				lm	black
3000K 2Wled 3 We	24V	18° ▲	with honeycomb	103	9026120011
		18° ▲	without honeycomb	178	9026120111
		36° ▲	with honeycomb	78	9026120211
		36° ▲	without honeycomb	234	9026120311



Tree Spot 03

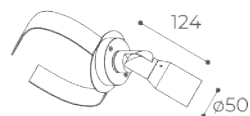


strap length l 1000mm

Available finishes:

- black
- olive green **on request*


Light Source power led
Supply 24V
Dimmer PWM
CRI ≥80
Electrical Class III
IP rating 65
Application tree
Diffuser transparent tempered glass

Power 24V 5,8Wled- 6,3We
Led Colour temp. 2700/3000K




			lm	black
2700K 24V 5,8Wled 6,3We	10° ▲	with honeycomb	243	9026320411
	10° ▲	without honeycomb	405	9026320511
	26° ▲	with honeycomb	251	9026320611
	26° ▲	without honeycomb	432	9026320711
	52° ▲	with honeycomb	135	9026320811
	52° ▲	without honeycomb	409	9026320911

			lm	black
3000K 24V 5,8Wled 6,3We	10° ▲	with honeycomb	253	9026120411
	10° ▲	without honeycomb	422	9026120511
	26° ▲	with honeycomb	264	9026120611
	26° ▲	without honeycomb	455	9026120711
	52° ▲	with honeycomb	142	9026120811
	52° ▲	without honeycomb	431	9026120911

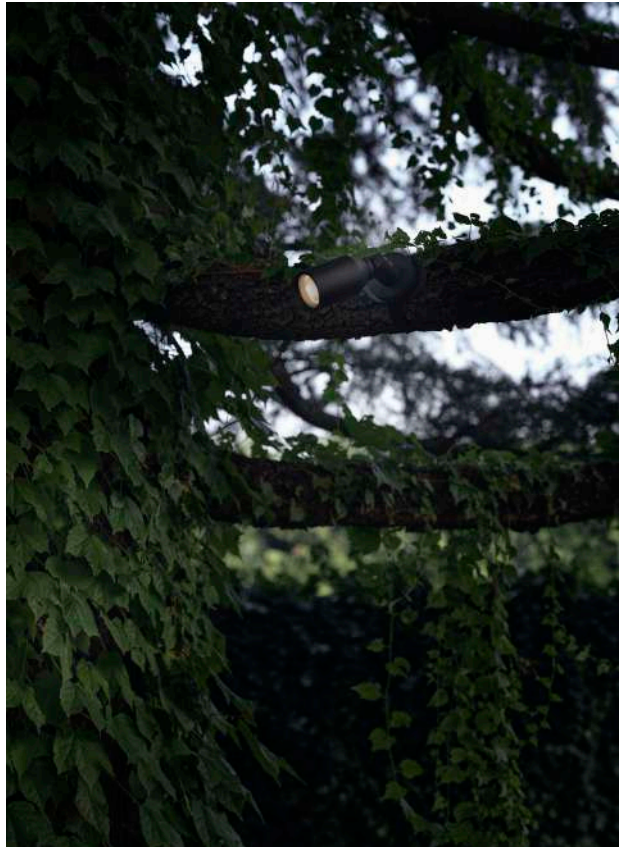

Tree Spot 05

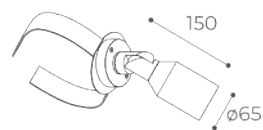


strap length l 1000mm

Available finishes:

- black
- olive green **on request*

Light Source power led
Supply 24V
Dimmer PWM
CRI ≥80
Electrical Class III
IP rating 65
Application tree
Diffuser transparent tempered glass

Power 24V 9Wled - 10We
Led Colour temp. 2700/3000K




				lm	black
2700K 9Wled 10We	24V	15°	with honeycomb		9026321011
		15°	without honeycomb	816	9026321111
		36°	with honeycomb		9026321211
		36°	without honeycomb	810	9026321311
		60°	without honeycomb	764	9026321411

				lm	black
3000K 9Wled 10We	24V	15°	with honeycomb		9026121011
		15°	without honeycomb	860	9026121111
		36°	with honeycomb		9026121211
		36°	without honeycomb	857	9026121311
		60°	without honeycomb	805	9026121411




ACCESSORIES



Power supply 16W 110-240V IP65
125x61x31mm

code **9059**




Power supply 24V DC 70W IP67
267x79x52mm

code **9049**




IP68 connection box gel

code **9080**




Power supply 24V DC 150W IP67
267x79x52mm

code **9057**



2 poles cable l 5000mm
incl. female connector

code **9081**



2 poles cable l 10000mm
incl. female connector

code **9082**

ACCESSORIES:

code **9059 / 9049 / 9057 / 9080 / 9081 / 9082**



Lila

THE PERFECT HARMONY BETWEEN THE NEED FOR LIGHT AND THE LONGING FOR BEAUTY

Discreet bollard, represents the perfect balance between contemporary design and decorative minimalism.

Lila is available in two heights. It features a steel stem treated and painted with black polyester powder, suitable for surface installation with a base or in the ground with a spike.

The diffuser is made of methacrylate with an integrated 24V LED board in 2700K and 3000K colors. A black aluminum anti-glare cover can be purchased separately

Un disco di luce sospeso nel verde degli spazi outdoor.

Lila, bollard estremamente discreto, rappresenta il perfetto equilibrio fra contemporaneità e minimalismo decorativo.

Lila è proposto in due altezze.

Caratterizzato da uno stelo in acciaio trattato e verniciato a polvere di poliestere nel colore nero, è adatto all'installazione su superficie nella versione con base o nel terreno con il picchetto.

Il diffusore è in metacrilato con scheda led 24V integrata nei colori 2700K e 3000K, acquistabile separatamente una cover antiabbagliamento in alluminio nero.











Lila

h430 / h730

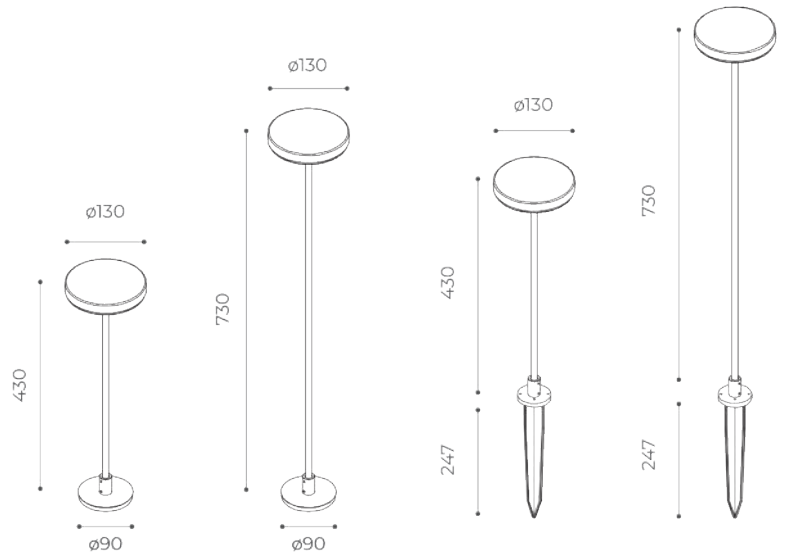

Available finishes:



Light Source mid power led
Supply 24V
Dimmer PWM
CRI ≥80
IP rating IP65
Electrical Class III
Application floor, ground
Diffuser sandblasted methacrylate

Power 24V - 6WeLed
Led Colour temp. 2700K / 3000K



h430

		lm		black	green
2700K	24V	560	with base	9025310011	9025310016
6Wled		560	with spike	9025310211	9025310216

3000K	24V	578	with base	9025110011	9025110016
6Wled		578	with spike	9025110211	9025110216

h730


		lm		black	green
2700K	24V	560	with base	9025310111	9025310116
6Wled		560	with spike	9025310311	9025310316

3000K	24V	578	with base	9025110111	9025110116
6Wled		578	with spike	9025110311	9025110316


ACCESSORIES




Top Cover
colour **Black**
code **9076**




Power supply 24V DC 150W IP67
267x79x52mm
code **9057**



Power supply 24V DC 70W IP67
267x79x52mm
code **9049**



SPD CL.1 12KV 320V UC max
40x57x20mm
code **9058**



Cover colour **Green**
code **90716**



ACCESSORIES:

code **9076 / 9049 / 9057 / 9058 / 90716**



Sofia

SPACE EXISTS WITH THE LIGHT THAT ILLUMINATES IT

Sofia Bollard ideal for gardens and green spaces, in extruded and die-cast aluminium, the LED board is fixed under the head and sealed with glass glued to the body with silicone glue.

Available in three heights (h.160mm; h.500mm; h.800mm)

The minimal line makes it suitable for all types of settings and the possibility of choosing between fixing with base or spike to all types of surfaces.

Sofia, un bollard ideale per giardini e spazi verdi, in alluminio estruso e pressofuso, finito con trattamento di cataforesi e strato di vernice di polvere di poliestere resistente agli ambienti esterni.

La scheda led è fissata sotto la testa e sigillata con vetro incollato al corpo con collante silicico.

Equipaggiato da Mid-power Led in 2700K o 3000K alimentati a 24V o 230V in tensione diretta di rete.


Disponibile in tre altezze (h.160mm; h.500mm; h.800mm)

La linea minimale lo rende adatto a tutti i tipi di ambientazione e la possibilità di scegliere fra fissaggio con base o picchetto a tutti i tipi di terreni.








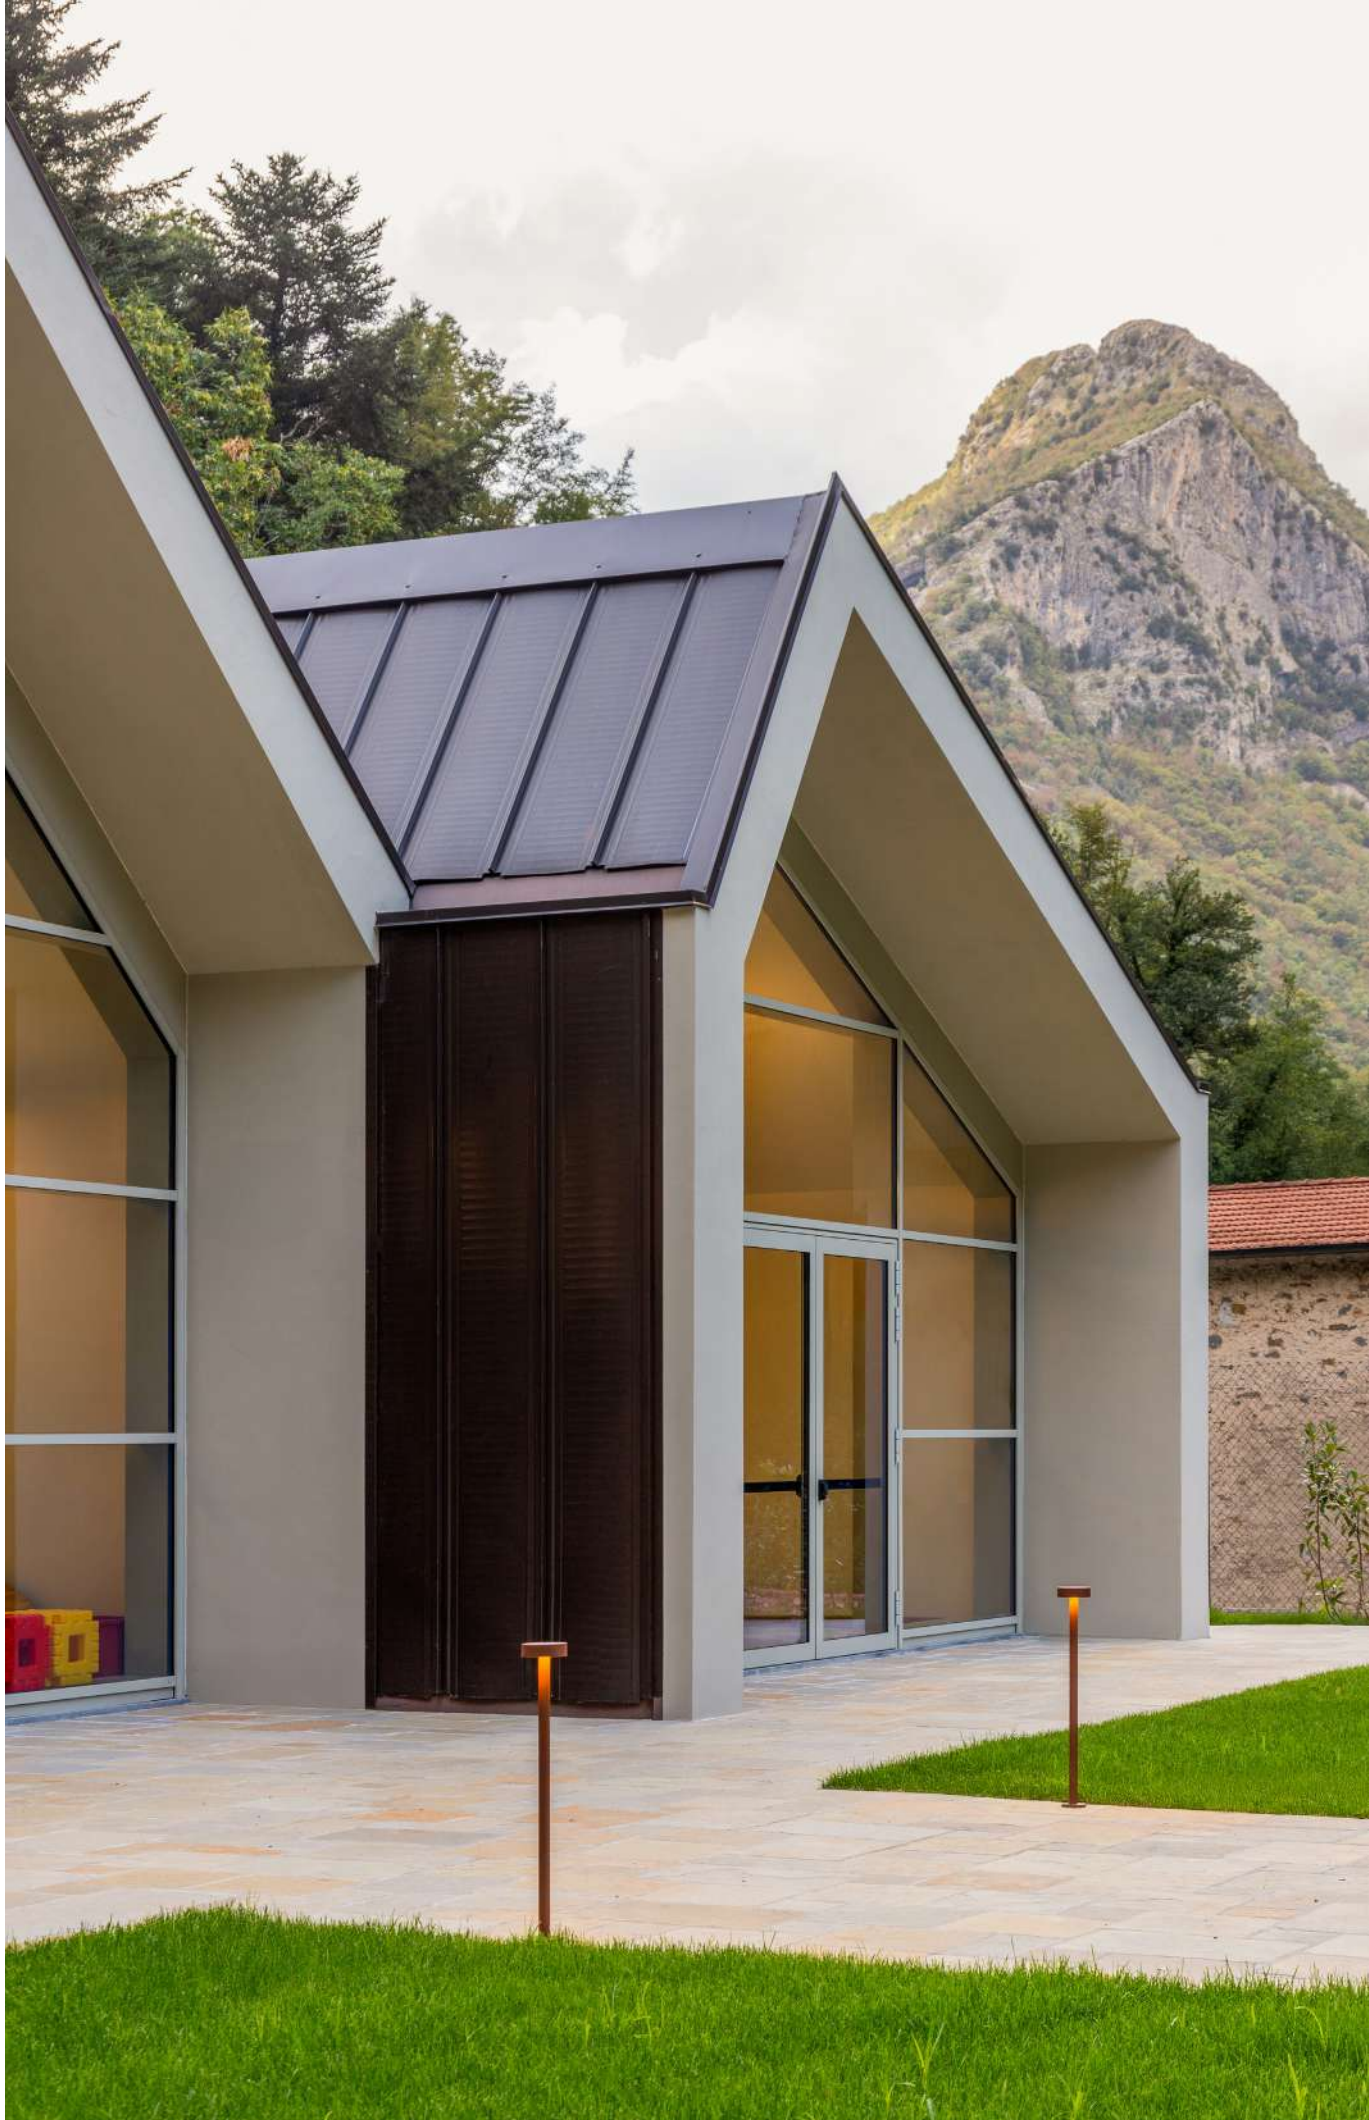


Sofia Base e Spike

h160

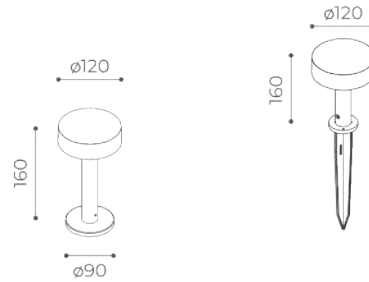

Available finishes:



Light Source Supply

mid power led
24V or 220-240V
mains voltage
only 24V (PWM)

Dimmer CRI

≥80

Electrical Class

I, III

IP rating

65

Application

floor

Diffuser

transparent tempered glass

Power

10W@ 230V / 24V 10Wled

Led Colour temp.

2700K/3000K



			lm	white	sand	graphite	aluminium	corten
2700K 10W@230V	220-240V	Base	1094	901237062	901237063	901237064	901237065	901237068
		Spike	1094	901237122	901237123	901237124	901237125	901237128


			lm	white	sand	graphite	aluminium	corten
3000K 10W@230V	220-240V	Base	1152	901217062	901217063	901217064	901217065	901217068
		Spike	1152	901217122	901217123	901217124	901217125	901217128

			lm	white	sand	graphite	aluminium	corten
2700K 10Wled	24V III	Base	1094	901237092	901237093	901237094	901237095	901237098
		Spike	1094	901237152	901237153	901237154	901237155	901237158

			lm	white	sand	graphite	aluminium	corten
3000K 10Wled	24V III	Base	1152	901217092	901217093	901217094	901217095	901217098
		Spike	1152	901217152	901217153	901217154	901217155	901217158

Sofia Base e Spike

h500

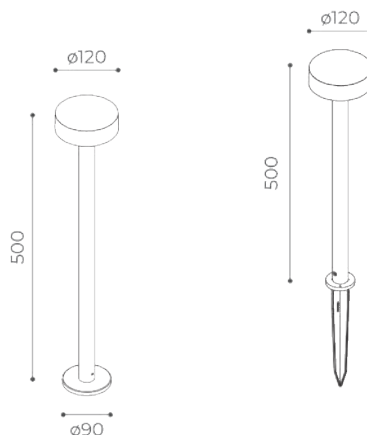

Available finishes:

- white
- sand
- graphite
- aluminium
- corten
- olive green **on request*

Light Source Supply

mid power led
24V or 220-240V
mains voltage

Dimmer CRI

only 24V (PWM)
≥80

Electrical Class

I, III

IP rating

65

Application

floor

Diffuser

transparent tempered glass

Power

10We 230V / 24V 10Wled

Led Colour temp.


2700K/3000K




			lm	white	sand	graphite	aluminium	corten
2700K 10W@230V	220-240V	Base	1094	901237072	901237073	901237074	901237075	901237078
		Spike	1094	901237132	901237133	901237134	901237135	901237138
			lm	white	sand	graphite	aluminium	corten
3000K 10W@230V	220-240V	Base	1152	901217072	901217073	901217074	901217075	901217078
		Spike	1152	901217132	901217133	901217134	901217135	901217138
			lm	white	sand	graphite	aluminium	corten
2700K 10Wled	24V III	Base	1094	901237102	901237103	901237104	901237105	901237108
		Spike	1094	901237162	901237163	901237164	901237165	901237168
			lm	white	sand	graphite	aluminium	corten
3000K 10Wled	24V III	Base	1152	901217102	901217103	901217104	901217105	901217108
		Spike	1152	901217162	901217163	901217164	901217165	901217168

Sofia Base e Spike

h800

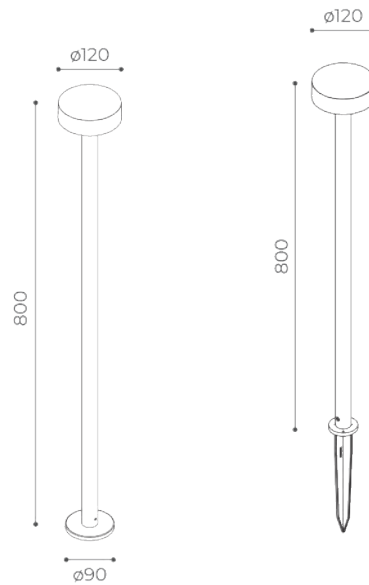

Available finishes:



Light Source Supply

Dimmer
CRI
Electrical Class
IP rating
Application
Diffuser

mid power led
 24V or 220-240V
 mains voltage
 only 24V (PWM)
 ≥80
 I, III
 65
 floor
 transparent tempered glass


Power
Led Colour temp.

10We 230V / 24V 10Wled
 2700K/3000K




			lm	white	sand	graphite	aluminium	corten
2700K 10W@230V	220-240V	Base	1094	901237082	901237083	901237084	901237085	901237088
		Spike	1094	901237142	901237143	901237144	901237145	901237148
			lm	white	sand	graphite	aluminium	corten
3000K 10W@230V	220-240V	Base	1152	901217082	901217083	901217084	901217085	901217088
		Spike	1152	901217142	901217143	901217144	901217145	901217148
			lm	white	sand	graphite	aluminium	corten
2700K 10Wled	24V	Base	1094	901237112	901237113	901237114	901237115	901237118
		Spike	1094	901237172	901237173	901237174	901237175	901237178
			lm	white	sand	graphite	aluminium	corten
3000K 10Wled	24V	Base	1152	901217112	901217113	901217114	901217115	901217118
		Spike	1152	901217172	901217173	901217174	901217175	901217178

ACCESSORIES




Shield 180°

code **9044**




Power supply 24V DC 70W IP67
267x79x52mm

code **9049**




2 way - 3 poles terminal block IP68
Ø23x66mm

code **9004**



Power supply 24V DC 150W IP67
267x79x52mm

code **9057**



3-4 way - 4 poles terminal block
IP68
53x26x82mm

code **9005**



ACCESSORIES:

code **9044 / 9004 / 9005 / 9049 / 9057**



Matita

SKETCHING SOFT LINES

Matita is a Bollard in extruded and die-cast aluminium, with a minimal line and characterized by the absence of a cylindrical diffuser, which is instead fixed under the head with silicone glue to guarantee IP tightness.

Available in three heights: h.160mm; h.500mm; h.800mm, led colours 2700K or 3000K and powered at low voltage or with integrated power supply.

The cleaning of the lines and the possibility of reducing the luminance with the use of the black instead of the white conical reflector, make Matita a bollard with multiple uses.

Matita è un bollard in alluminio estruso e pressofuso finito con trattamento di cataforesi e strato di vernice di polvere di poliestere resistente agli ambienti esterni.

Dalla linea minimale, è caratterizzato dall'assenza di un diffusore cilindrico, che è invece fissato sotto la testa con collante siliconico a garanzia della tenuta IP.

Equipaggiato con scheda Mid-power Led 2700K o 3000K e disponibile in tre altezze: h.160mm; h.500mm; h.800mm.

È alimentato a bassa tensione o con alimentatore integrato.


La pulizia delle linee e la possibilità di ridurre la luminanza (possibilità di scegliere la versione con riflettore conico nero) rendono matita un bollard dai molteplici utilizzi.





Matita

h160



Available finishes:

-  white
-  sand
-  graphite
-  aluminium
-  corten
-  olive green **on request*

Light Source Supply

mid power led
220-240V direct
or 220-240V power supply
included

Power

10We direct / 220-240V
10WLed - 13,5We

Dimmer CRI

not
≥80

Led Colour temp.

2700K/3000K

Electrical Class

I, II

IP rating

65

Application

floor

Diffuser

transparent tempered glass



				lm	white	sand	graphite	aluminium	corten
2700K	220- 240V	I	White Reflector	1094	900331102	900331103	900331104	900331105	900331108
			Black Reflector	765	900331112	900331113	900331114	900331115	900331118


				lm	white	sand	graphite	aluminium	corten
3000K	220- 240V	I	White Reflector	1152	900311102	900311103	900311104	900311105	900311108
			Black Reflector	806	900311112	900311113	900311114	900311115	900311118

				lm	white	sand	graphite	aluminium	corten
2700K	220- 240V	II	White Reflector	1100	900330012	900330013	900330014	900330015	900330018
			Black Reflector	880	900330062	900330063	900330064	900330065	900330068

				lm	white	sand	graphite	aluminium	corten
3000K	220- 240V	II	White Reflector	1158	900310012	900310013	900310014	900310015	900310018
			Black Reflector	926	900310062	900310063	900310064	900310065	900310068

Matita

h500

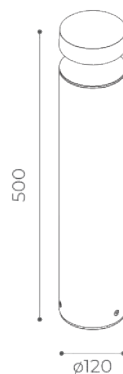

Available finishes:

- white
- sand
- graphite
- aluminium
- corten
- olive green **on request*

Light Source Supply

mid power led
220-240V direct
or 220-240V power supply
included

Dimmer

upon request
for power supply version

CRI

≥80

Electrical Class

I, II

IP rating

65

Application

floor

Diffuser

transparent tempered glass

Power

10We direct / 220-240V

10WLed - 13,5We

Led Colour temp.

2700K/3000K



			lm	white	sand	graphite	aluminium	corten
2700K 10W@230V	220- 240V	I	White Reflector 1094	900331122	900331123	900331124	900331125	900331128
			Black Reflector 765	900331132	900331133	900331134	900331135	900331138


			lm	white	sand	graphite	aluminium	corten
3000K 10W@230V	220- 240V	I	White Reflector 1152	900311122	900311123	900311124	900311125	900311128
			Black Reflector 806	900311132	900311133	900311134	900311135	900311138

			lm	white	sand	graphite	aluminium	corten
2700K 10Wled 13,5We	220- 240V	II	White Reflector 1100	900330032	900330033	900330034	900330035	900330038
			Black Reflector 880	900330072	900330073	900330074	900330075	900330078

			lm	white	sand	graphite	aluminium	corten
3000K 10Wled 13,5We	220- 240V	II	White Reflector 1158	900310032	900310033	900310034	900310035	900310038
			Black Reflector 926	900310072	900310073	900310074	900310075	900310078

Matita

h800

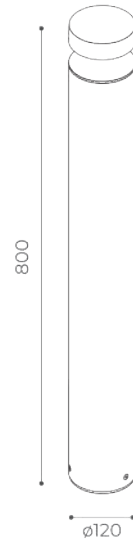

Available finishes:

- white
- sand
- graphite
- aluminium
- corten
- olive green **on request*

Light Source Supply

mid power led
220-240V direct
or 220-240V power supply
included

Dimmer

upon request
for power supply version

CRI

≥80

Electrical Class

I, II

IP rating

65

Application

floor

Diffuser

transparent tempered glass

Power

10We direct / 220-240V

10WLed - 13,5We

Led Colour temp.

2700K/3000K




			lm	white	sand	graphite	aluminium	corten	
2700K	220- 240V	I	White Reflector	1094	900331142	900331143	900331144	900331145	900331148
			Black Reflector	765	900331152	900331153	900331154	900331155	900331158

			lm	white	sand	graphite	aluminium	corten	
3000K	220- 240V	I	White Reflector	1152	900311142	900311143	900311144	900311145	900311148
			Black Reflector	806	900311152	900311153	900311154	900311155	900311158

			lm	white	sand	graphite	aluminium	corten	
2700K	220- 240V	II	White Reflector	1100	900330052	900330053	900330054	900330055	900330058
			Black Reflector	880	900330082	900330083	900330084	900330085	900330088

			lm	white	sand	graphite	aluminium	corten	
3000K	220- 240V	II	White Reflector	1158	900310052	900310053	900310054	900310055	900310058
			Black Reflector	926	900310082	900310083	900310084	900310085	900310088

ACCESSORIES




Shield 180°

code **9044**



Anchor bolts
Ø117x161mm

code **9009**



2-3 way 3 poles terminal block IP68
62x35x178mm

code **9036**

ACCESSORIES:

code 9044 / 9009 / 9036



Nail

STEADY LIKE A LIGHTHOUSE THAT GUIDES SAILOR HOME

Pole top made of die-cast aluminum, finished with cataphoresis treatment and a layer of polyester powder coating, resistant to outdoor environments.

Nail is characterized by a clean and essential design, efficient and adaptable to any type of installation.

Equipped with Power LEDs in 3000K color temperature, it is available in two versions: with optics or with a diffused beam, thanks to frosted glass.

The power supply is integrated into the pole, using a special sealed capsule that is easy to install with connectors.

The variety of pole heights and the available in sand and white colors make NAIL suitable even for residential settings.

Testa palo in alluminio pressofuso, finito con trattamento di cataforesi e strato di vernice di polvere di poliestere resistente agli ambienti esterni.

Nail è caratterizzato da una linea pulita ed essenziale, efficiente e che si adatta facilmente ad ogni tipo di installazione.

Equipaggiato con Power Led, nella colorazione 3000K, si propone in due versioni: con ottiche oppure con fascio diffuso grazie al vetro sabbia-to.

L'alimentazione è integrata nel palo, grazie ad una speciale capsula stagna di facile installazione grazie all'utilizzo di connettori.


La proposta di molteplici altezze per i pali e i colori sabbia e bianco, rendono NAIL adatto anche ad un ambito residenziale.





Nail Transparent Glass

Ø60/Ø76

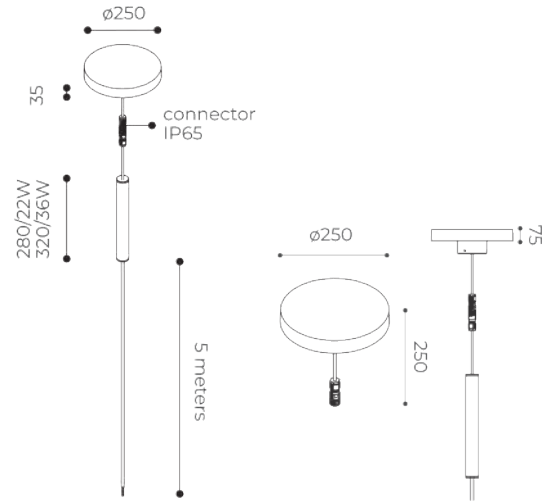

Available finishes:



Light Source power led
Supply 220-240V
Dimmer upon request
CRI ≥80
IP rating IP65
Electrical Class I
Application top pole
Diffuser tempered transparent glass

Power 220-240V 36W/Led 40We
Led Colour temp. 3000K



Ø60


			lm	white	sand	graphite
3000K	220- 240V	▲ 30°	4960	902111002	902111003	902111004
36Wled		▲ 130°	4660	902111012	902111013	902111014
40We		▲ 150°	3990	902111022	902111023	902111024

Ø76

			lm	white	sand	graphite
3000K	220- 240V	▲ 30°	4960	902111032	902111033	902111034
36Wled		▲ 130°	4660	902111042	902111043	902111044
40We		▲ 150°	3990	902111052	902111053	902111054

Nail Sandblasted Glass

Ø60

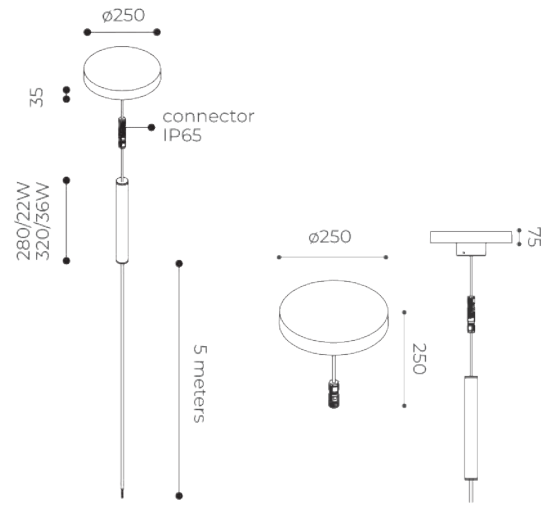

Available finishes:

- white
- sand
- graphite
- olive green **on request*

Light Source power led
Supply 220 - 240V
Dimmer upon request
CRI ≥80
IP rating IP65
Electrical Class I
Application top pole
Diffuser tempered transparent glass

Power 220-240V 22W/led 25We
Led Colour temp. 3000K



Ø60

		lm	white	sand	graphite
3000K	220- 240V	diffused	2330	902111062	902111063
22W/led					902111064
25We					



ACCESSORIES



$\varnothing 60\text{mm}$
h1200mm
 colour **White**

code **90672**

$\varnothing 60\text{mm}$
h1200mm
 colour **Sand**

code **90673**

$\varnothing 60\text{mm}$
h1200mm
 colour **Graphite**

code **90674**



$\varnothing 60\text{mm}$
h1600mm
 colour **White**

code **90682**

$\varnothing 60\text{mm}$
h1600mm
 colour **Sand**

code **90683**

$\varnothing 60\text{mm}$
h1600mm
 colour **Graphite**

code **90684**



$\varnothing 60\text{mm}$
h2600mm
 colour **White**

code **90692**

$\varnothing 60\text{mm}$
h2600mm
 colour **Sand**

code **90693**

$\varnothing 60\text{mm}$
h2600mm
 colour **Graphite**

code **90694**



$\varnothing 76\text{mm}$
h4000mm
 colour **White**


code **90622**

$\varnothing 76\text{mm}$
h4000mm
 colour **Sand**

code **90623**

$\varnothing 76\text{mm}$
h4000mm
 colour **Graphite**

code **90624**



$\varnothing 60\text{mm}$
h2500mm with base
 colour **White**

code **90702**

$\varnothing 60\text{mm}$
h2500mm with base
 colour **Sand**

code **90703**

$\varnothing 60\text{mm}$
h2500mm with base
 colour **Graphite**

code **90704**

ACCESSORIES:

code **90672 / 90673 / 90674 / 90682 / 90683 / 90684 / 90692 / 90693 / 90694**

code **90622 / 90623 / 90624 / 90702 / 90703 / 90704**



Matita Square

LIGHT IS SHAPE AND VISION

Matita Square is a bollard made of extruded and die-cast aluminum, finished with cathodolysis treatment and a layer of polyester powder paint resistant to outdoor environments.

With clean and simple lines, the diffuser is attached under the head with silicone adhesive to ensure IP protection and is characterized by a conical reflector.

Equipped with a Mid-power LED board (2700K or 3000K), it is available in four heights: h.160mm; h.300mm; h.500mm; h.800mm, and operates at low voltage.

The clean lines and the option to reduce luminance (with the possibility of choosing a version with a black conical reflector) make Matita a versatile bollard for various uses.

Matita Square è un bollard in alluminio estruso e pressofuso finito con trattamento di cataforesi e strato di vernice di polvere di poliestere resistente agli ambienti esterni.

Dalla linea pure e pulite, il diffusore è invece fissato sotto la testa con collante silconico a garanzia della tenuta IP ed è caratterizzato da un riflettore conico.

Equipaggiato con scheda Mid-power Led 2700K o 3000K e disponibile in quattro altezze: h.160mm; h.300mm; h.500mm; h.800mm e alimentato a bassa tensione.


La pulizia delle linee e la possibilità di ridurre la luminanza (possibilità di scegliere la versione con riflettore conico nero) rendono matita un bollard dai molteplici utilizzi.





Matita Square

h160



Available finishes:

- white
- sand
- graphite
- aluminium
- corten
- olive green **on request*

Light Source mid power led
Supply 220-240V
CRI ≥80
Electrical Class II
IP rating 65
Application ground
Diffuser frosted polycarbonate

Power 220-240V 6,2Wled 8,5We
Led Colour temp. 2700K/3000K




		lm		white	sand	graphite	aluminium	corten
2700K 6,2Wled 8,5 We	220- 240V	White Reflector	350	901331002	901331003	901331004	901331005	901331008
		Black Reflector	212	901331012	901331013	901331014	901331015	901331018
3000K 6,2Wled 8,5 We	220- 240V	White Reflector	368	901311002	901311003	901311004	901311005	901311008
		Black Reflector	223	901311012	901311013	901311014	901311015	901311018

ACCESSORIES:

code 9041 | anchor bolts □76(100 min) x 160mm

Matita Square

h300

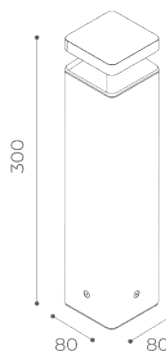

Available finishes:

- white
- sand
- graphite
- aluminium
- corten
- olive green **on request*

Light Source mid power led
Supply 220-240V
CRI ≥80
Electrical Class II
IP rating 65
Application ground
Diffuser frosted polycarbonate

Power 220-240V 6,2Wled 8,5We
Led Colour temp. 2700K/3000K




		lm		white	sand	graphite	aluminium	corten
2700K 6,2Wled 8,5 We	220- 240V	White Reflector	350	901331022	901331023	901331024	901331025	901331028
		Black Reflector	212	901331032	901331033	901331034	901331035	901331038
3000K 6,2Wled 8,5 We	220- 240V	White Reflector	368	901311022	901311023	901311024	901311025	901311028
		Black Reflector	223	901311032	901311033	901311034	901311035	901311038

ACCESSORIES:

code 9041 | anchor bolts □76(100 min) x 160mm

Matita Square

h500

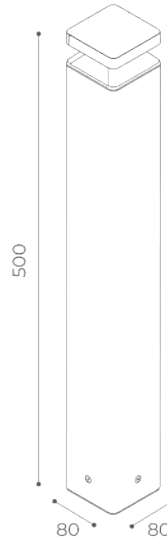

Available finishes:

- white
- sand
- graphite
- aluminium
- corten
- olive green **on request*

Light Source mid power led
Supply 220-240V
CRI ≥80
Electrical Class II
IP rating 65
Application ground
Diffuser frosted polycarbonate

Power 220-240V 6,2Wled 8,5We
Led Colour temp. 2700K/3000K




			lm	white	sand	graphite	aluminium	corten
2700K 6,2Wled 8,5 We	220- 240V	White Reflector	350	901331062	901331063	901331064	901331065	901331068
		Black Reflector	212	901331072	901331073	901331074	901331075	901331078
3000K 6,2Wled 8,5 We	220- 240V	White Reflector	368	901311062	901311063	901311064	901311065	901311068
		Black Reflector	223	901311072	901311073	901311074	901311075	901311078

ACCESSORIES:

code 9041 | anchor bolts □76(100 min) x 160mm

Matita Square

h800

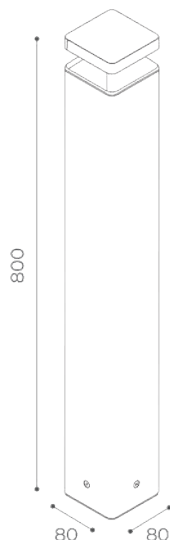

Available finishes:

- white
- sand
- graphite
- aluminium
- corten
- olive green **on request*

Light Source mid power led
Supply 220-240V
CRI ≥80
Electrical Class II
IP rating 65
Application ground
Diffuser frosted polycarbonate

Power 220-240V 6,2Wled 8,5We
Led Colour temp. 2700K/3000K



		lm		white	sand	graphite	aluminium	corten
2700K 6,2Wled 8,5 We	220- 240V	White Reflector	350	901331042	901331043	901331044	901331045	901331048
		Black Reflector	212	901331052	901331053	901331054	901331055	901331058
3000K 6,2Wled 8,5 We	220- 240V	White Reflector	368	901311042	901311043	901311044	901311045	901311048
		Black Reflector	223	901311052	901311053	901311054	901311055	901311058

ACCESSORIES:

code 9041 | anchor bolts □76(100 min) x 160mm



Zeus

A WAY TO RETHINK SHAPES WE HAVE ALWAYS KNOWN

Zeus Simple lines for a soft design bollard for ground or surface installation.

The white colour of the reflector, in contrast with the structure, gives this bollard a touch of design that makes it suitable for any type of installation, the positioning of the LED board on the product makes it capable of a charming and low-impact light.


The structure in extruded and die-cast aluminium, the glass fixed under the emission source with silicone glue to guarantee the IP seal, steel fixing plate.

Zeus ha linee semplici dal design non banale ed è ideale per l'installazione a terra o su superfici; è prodotto in alluminio estruso e pressofuso, finito con trattamento di cataforesi e strato di vernice di polvere di poliestere resistente agli ambienti esterni.

La scheda led è fissata sotto la testa emissiva ed equipaggiata da Mid-power led disponibili in 2700K o 3000K.


La tenuta IP è garantita dal vetro temprato e segrigrafato, fissato con tecnologia robotica e collante siliconico. La piastra di fissaggio in acciaio.



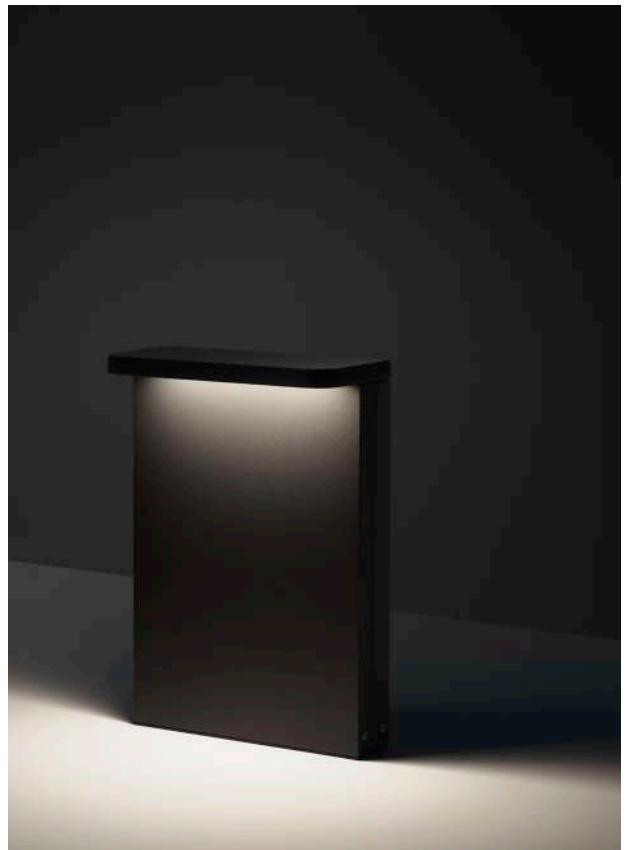

Zeus

h115



Available finishes:



Light Source mid power led
Supply 220-240V
Dimmer upon request
CRI ≥80
Electrical Class II
IP rating 65
Application ground
Diffuser transparent tempered glass


Power 220-240V 10Wled 12,6We
Led Colour temp. 2700K/3000K



		lm	white	sand	graphite	aluminium	corten	green
2700K 10Wled 12,6 We	220-240V	645	901531042	901531043	901531044	901531045	901531048	901531046
3000K 10Wled 12,6 We	220-240V	672	901511042	901511043	901511044	901511045	901511048	901511046

Zeus

h315

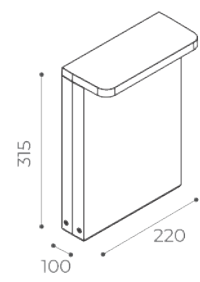

Available finishes:

-  white
-  sand
-  graphite
-  aluminium
-  corten
-  olive green

Light Source mid power led
Supply 220-240V
Dimmer upon request
CRI ≥80
Electrical Class II
IP rating 65
Application ground
Diffuser transparent tempered glass


Power 220-240V 10Wled 12,6We
Led Colour temp. 2700K/3000K



		lm	white	sand	graphite	aluminium	corten	green
2700K 10Wled 12,6 We	220-240V	645	901531052	901531053	901531054	901531055	901531058	9015310516
3000K 10Wled 12,6 We	220-240V	672	901511052	901511053	901511054	901511055	901511058	9015110516

Zeus

h715

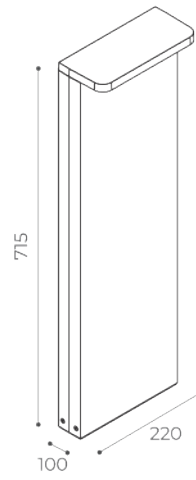

Available finishes:



Light Source mid power led
Supply 220-240V
Dimmer upon request
CRI ≥80
Electrical Class II
IP rating 65
Application ground
Diffuser transparent tempered glass


Power 220-240V 10Wled 12,6We
Led Colour temp. 2700K/3000K



h715


		lm	white	sand	graphite	aluminium	corten	green
2700K 10Wled 12,6 We	220-240V	645	901531062	901531063	901531064	901531065	901531068	9015310616
3000K 10Wled 12,6 We	220-240V	672	901511062	901511063	901511064	901511065	901511068	9015110616

ACCESSORIES



Anchor bolts
219x49 (90max) x 175mm

code **9042**



3-4 way - 4 poles terminal block IP68
53x26x82mm

code **9005**



ACCESSORIES:

code **9042 / 9005**



Lightsaber

IT IS HARD TO IMAGINE SOMETHING MORE BEAUTIFUL THAN THE TURNING UP OF LIGHT IN THE DARK

Linear outdoor fixture available in multiple models with 4 standard sizes and equipped with two types of light-emitting sources.

The Mid-power LED version offers soft and medium-wide light beams with power ranges from 8W to 32W, with a low-voltage 24V or 220-240V integrated power supply.

The Power LED version offers more technical solutions, with power ranges from 12W to 50W and precise optics that include narrow, medium, and asymmetric beams.

Entirely made of high-quality extruded or die-cast aluminum, treated with cathodolysis and coated with a layer of polyester powder resistant to outdoor environments.

The transparent tempered glass diffuser is attached to the body with a robotic silicon gluing system.

The structure design, with an external housing for the power supply to manage temperatures, and adjustable fixing brackets on the body, make this linear product easy to use.


Apparecchio lineare per esterni in alluminio verniciato che si compone di molteplici modelli disponibili in 4 misure standard ed equipaggiati con due tipi sorgenti emissive.

La versione Mid-power led offre fasci luminosi morbidi e di media ampiezza con potenze fra gli 8W e i 32W alimentazione a bassa tensione 24V o 220-240V integrata.

La versione Power led offre soluzioni più tecniche, con potenze fra 12W e 50W e ottiche puntuali che comprendono fasci stretti, medi e asimmetrici. Interamente in alluminio estruso o pressofuso di primaria qualità, con trattamento di cataforesi e rivestito da uno strato di polvere di poliestere resistente agli ambienti esterni.

Il diffusore in vetro temprato trasparente fissato al corpo con sistema robotico con collante silicico.

Lo sviluppo della struttura con alloggiamento esterno dell'alimentatore per il contenimento delle temperature e le staffe di fissaggio regolabili sul corpo rendono questo lineare un prodotto di semplice utilizzo.


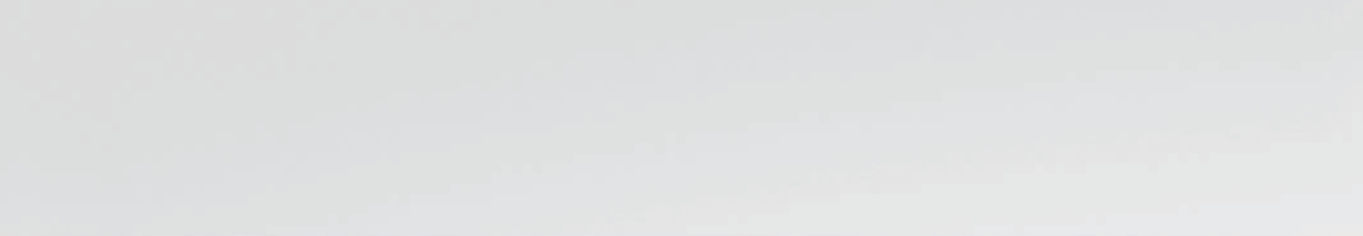



[Redacted]

[Redacted]

[Redacted]


[Redacted]

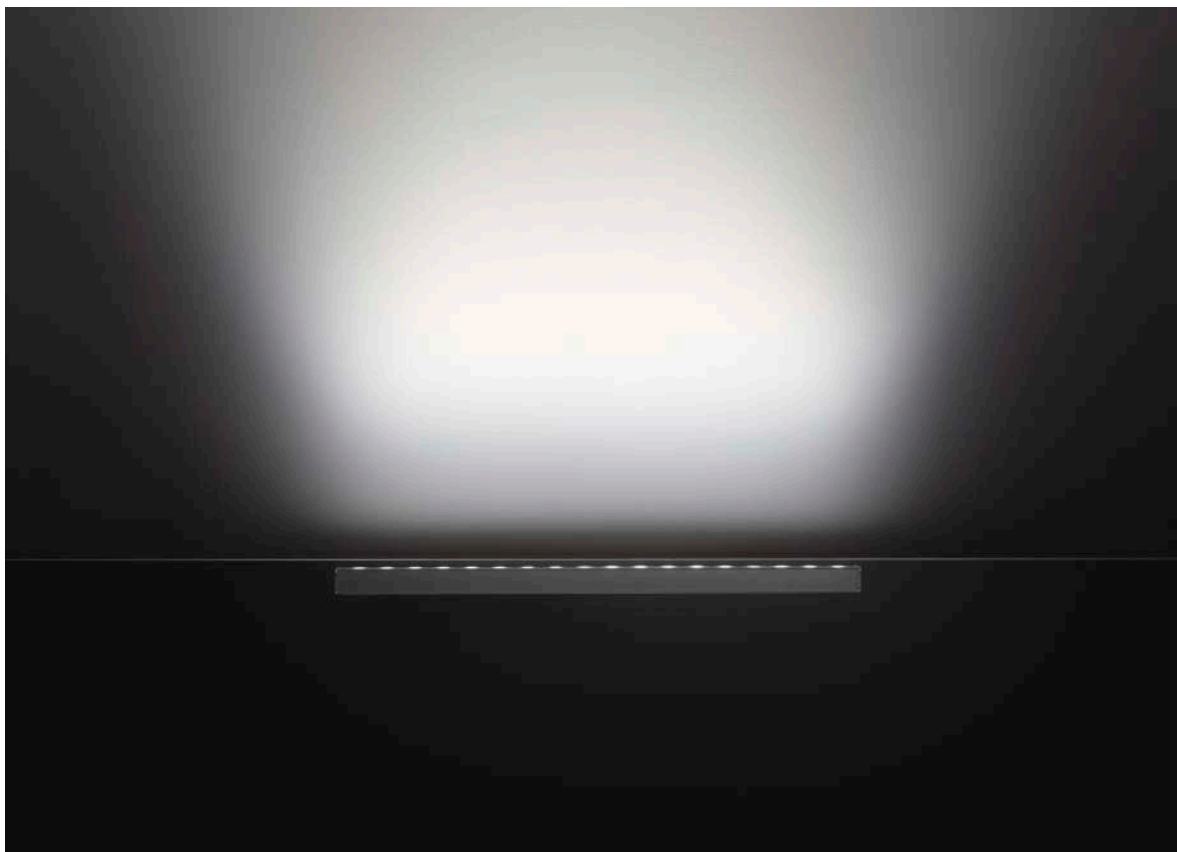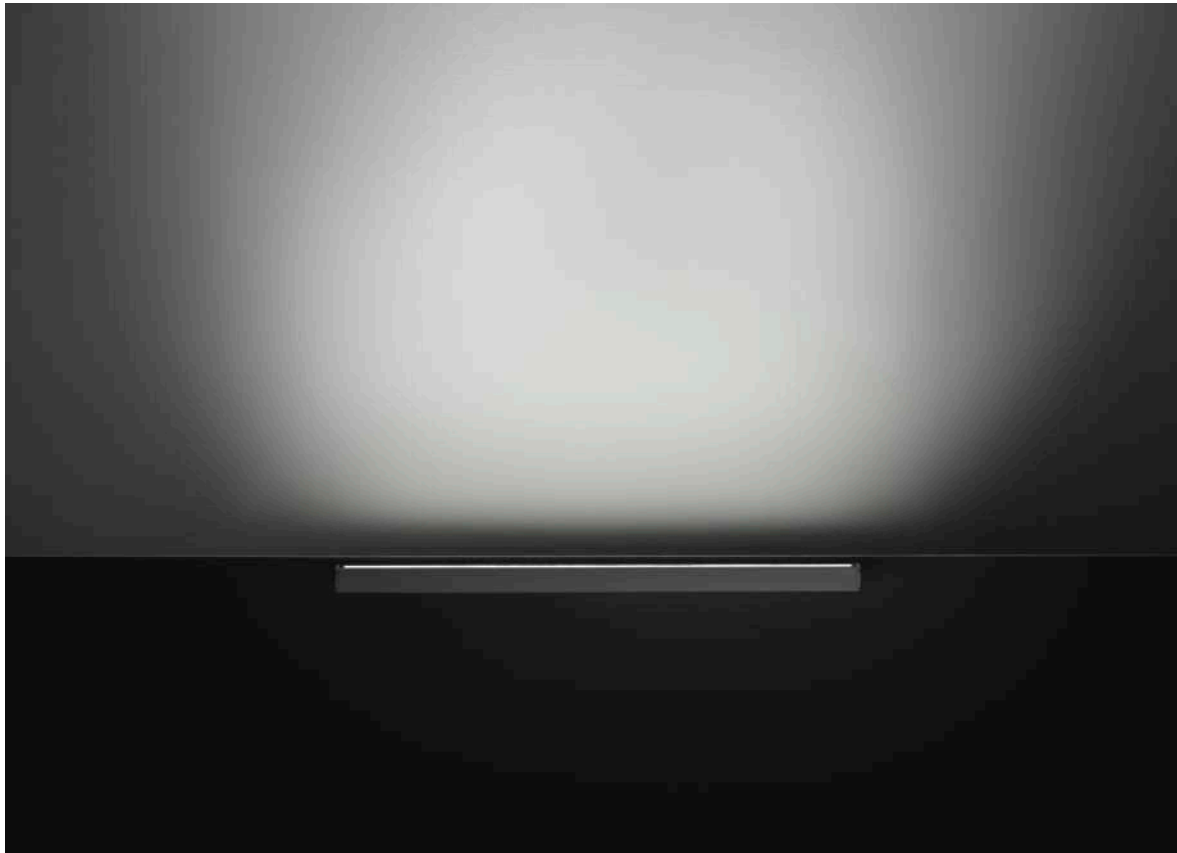

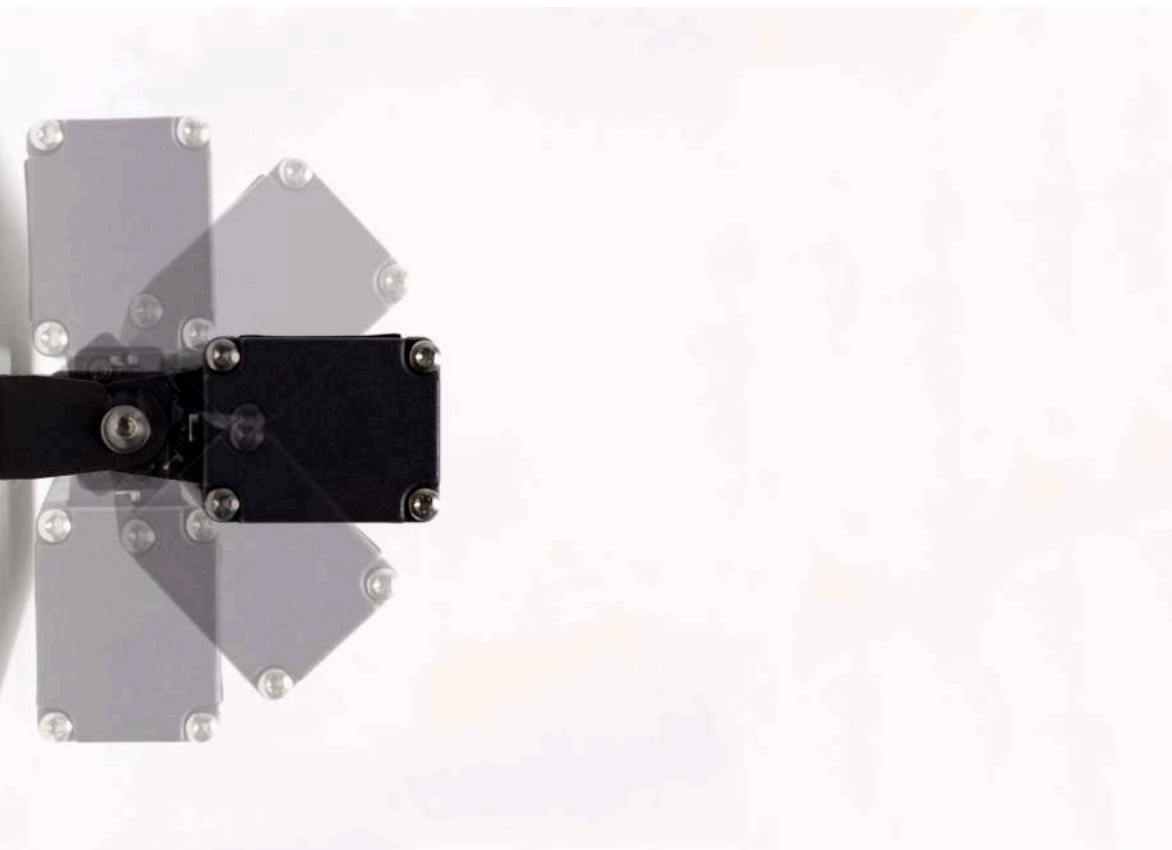





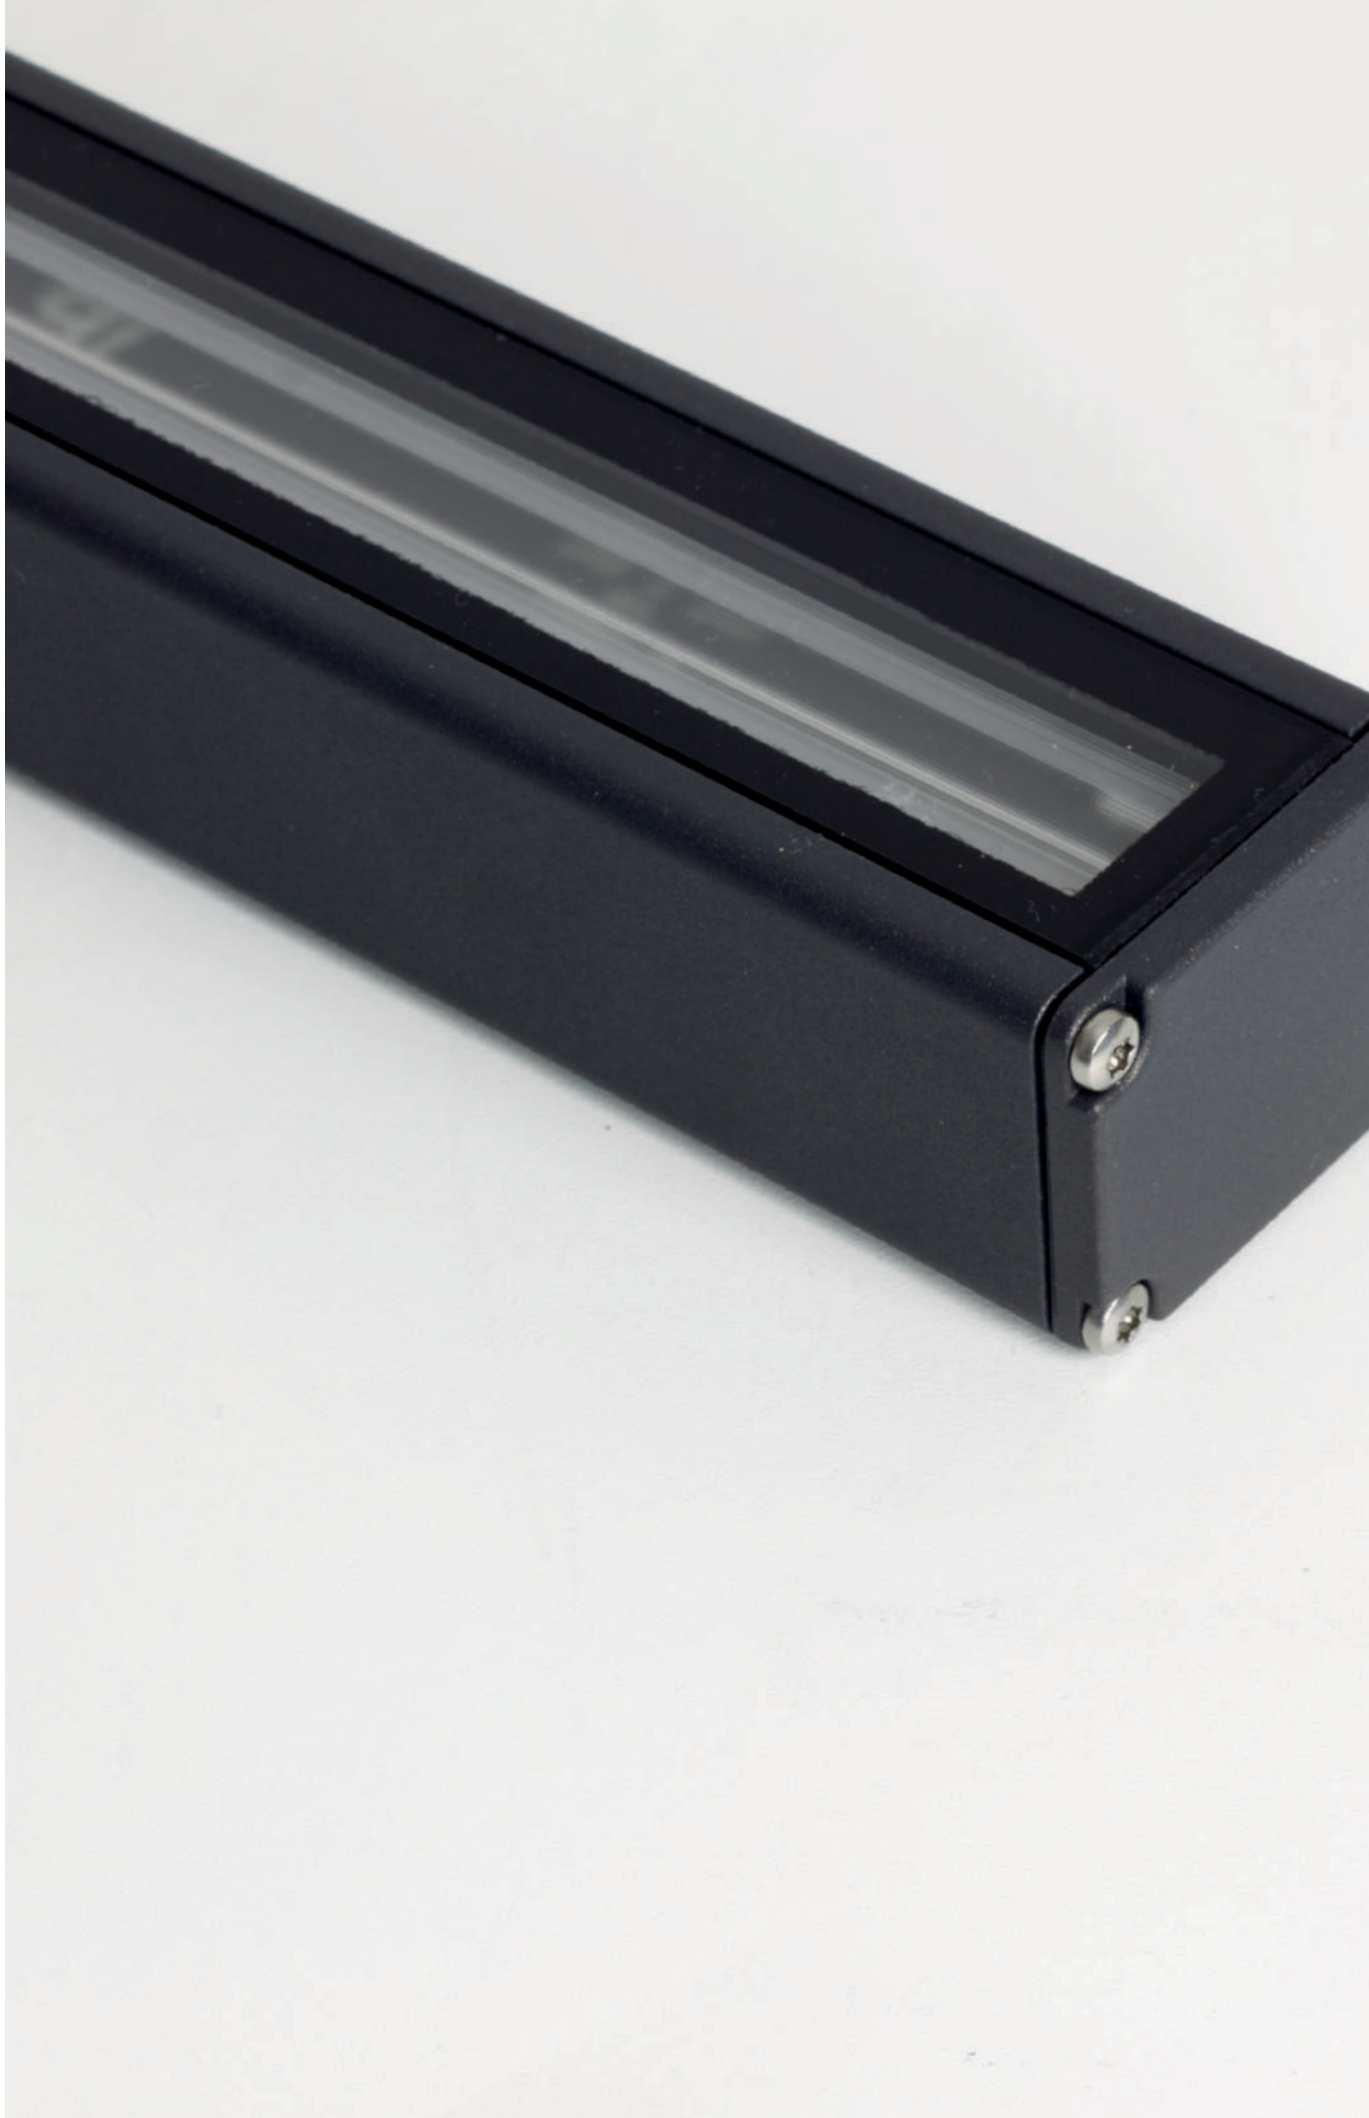




44°



80°



31°x88°

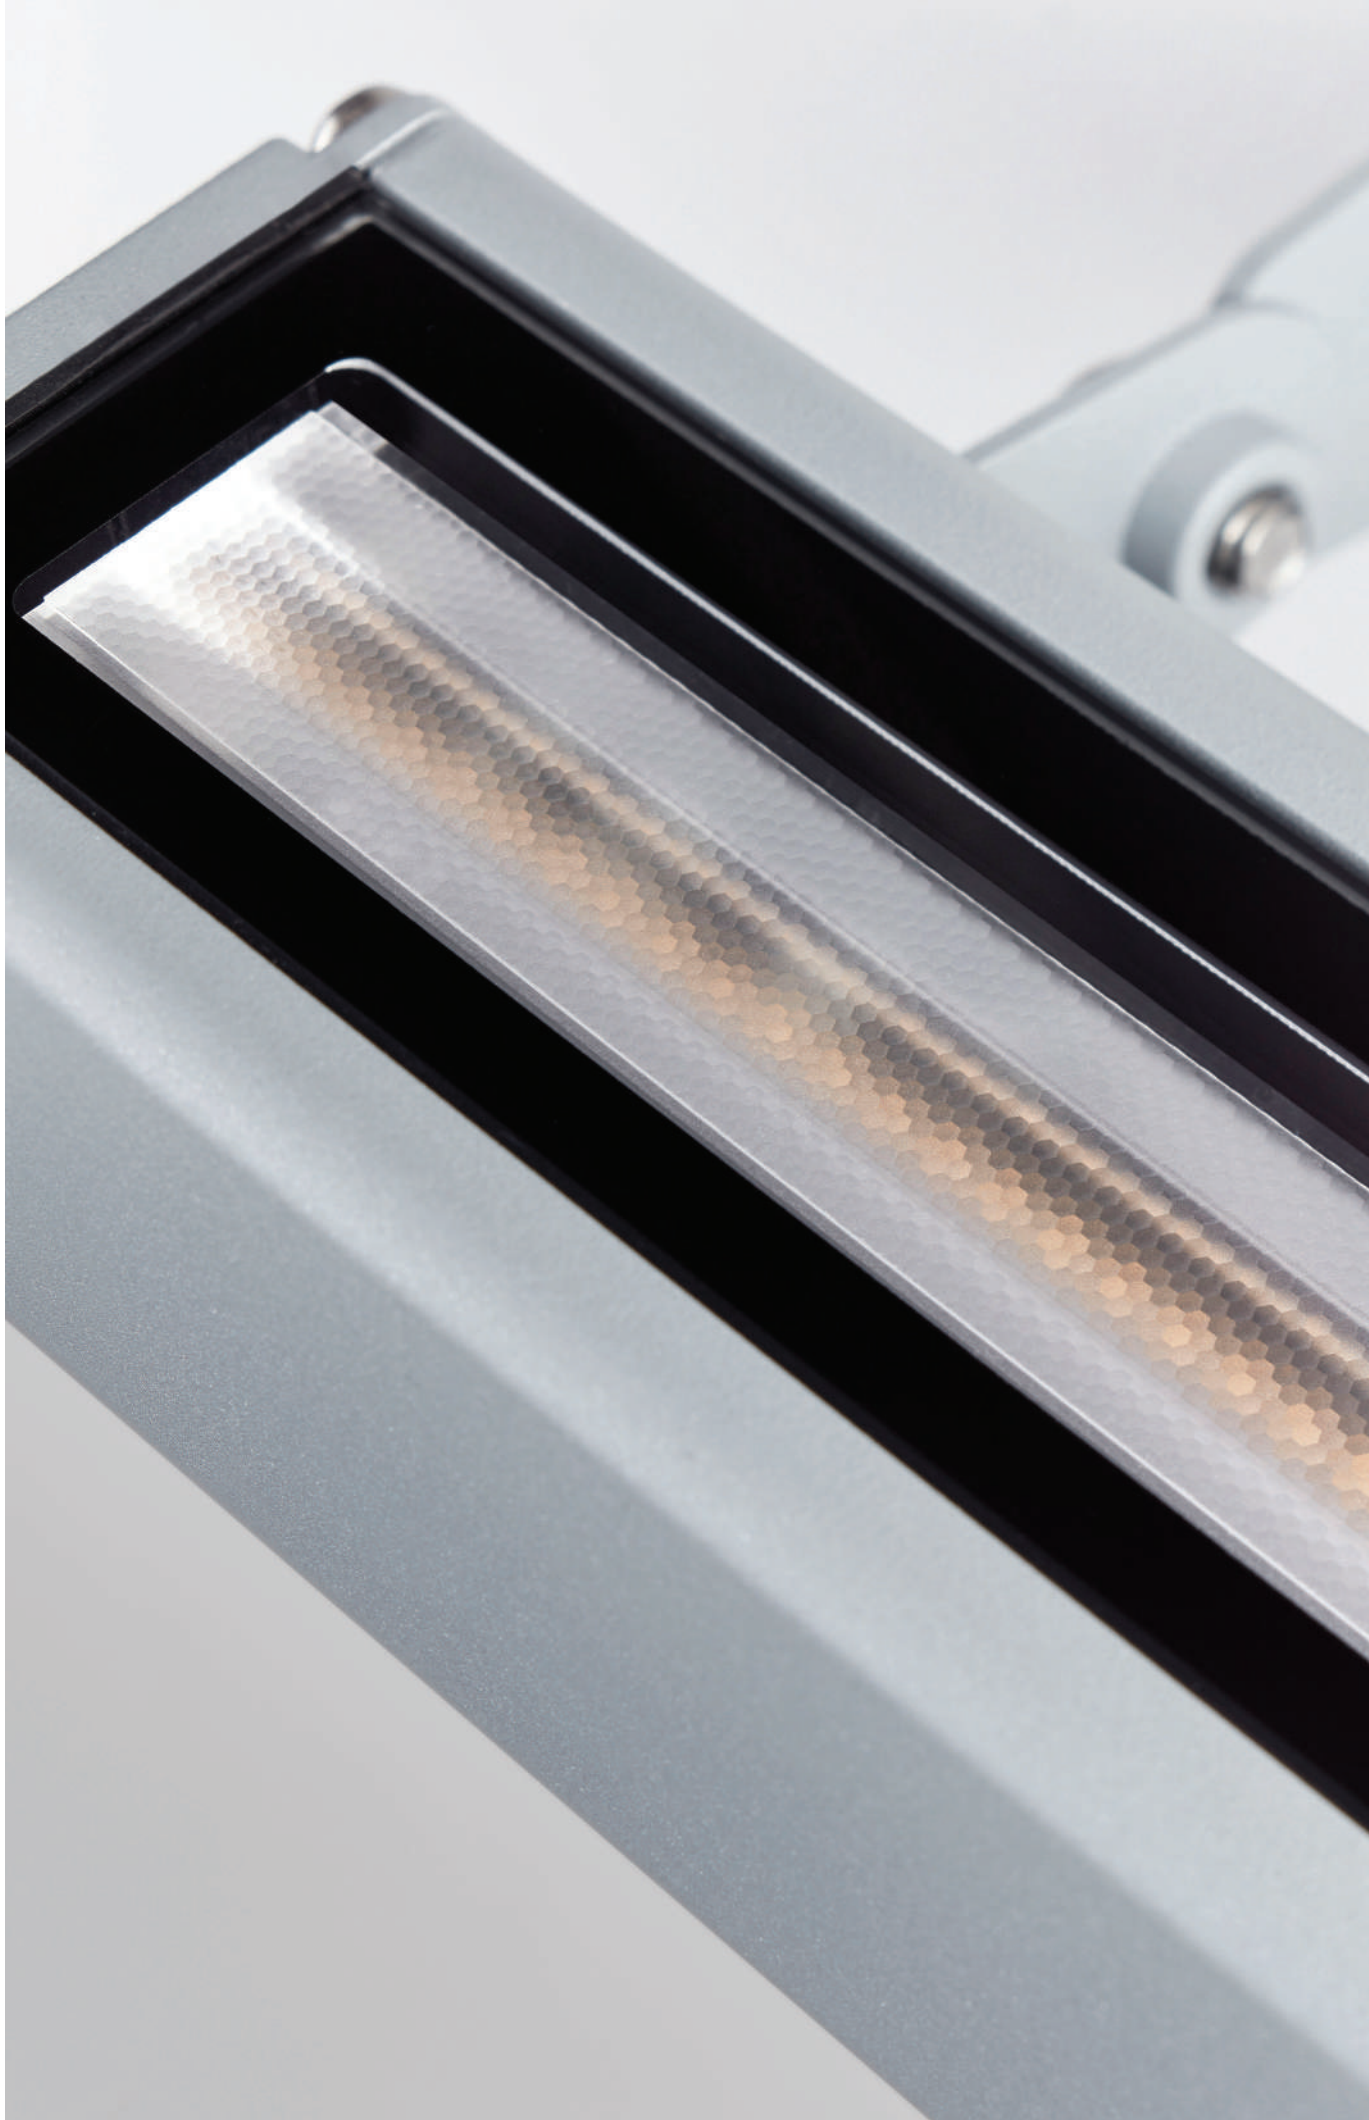







Lightsaber power led

L306mm

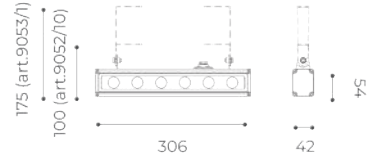

Available finishes:



Light Source power led
Power 220-240V
Dimmer not
CRI ≥80
IP Rating IP65
Electrical Class I
Application wall, floor, roof
Diffuser tempered extra-clear glass, silk-screened


Power 220-240V 12Wled - 15,6We
Led Colour temp. 2700K / 3000K



				lm	graphite	aluminium
2700K 12Wled 15,6 We	220-240V	▲ 14°		1187	901731004	901731005
		▲ 28°		1233	901731014	901731015
		▲ 45°		1148	901731024	901731025
		● 52°x12°		1211	901731034	901731035
				lm	graphite	aluminium
3000K 12Wled 15,6 We	220-240V	▲ 14°		1249	901711004	901711005
		▲ 28°		1298	901711014	901711015
		▲ 45°		1208	901711024	901711025
		● 52°x12°		1275	901711034	901711035

Lightsaber power led

L586mm

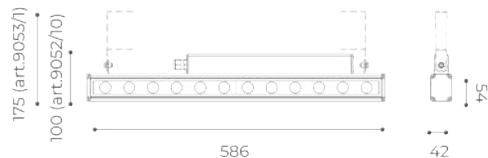

Available finishes:



Light Source power led
Power 220-240V
Dimmer upon request
CRI ≥80
IP Rating IP65
Electrical Class I
Application wall, floor, roof
Diffuser tempered extra-clear glass, silk-screened


Power 220-240V
 24,6Wled - 29We
Led Colour temp. 2700K / 3000K



				lm	graphite	aluminium
2700K 24,6Wled 29We	220-240V	▲ 14°	2374	901731044	901731045	
		▲ 28°	2467	901731054	901731055	
		▲ 45°	2296	901731064	901731065	
		● 52°x12°	2422	901731074	901731075	
				lm	graphite	aluminium
3000K 24,6Wled 29We	220-240V	▲ 14°	2499	901711044	901711045	
		▲ 28°	2596	901711054	901711055	
		▲ 45°	2416	901711064	901711065	
		● 52°x12°	2677	901711074	901711075	

Lightsaber power led

L866mm

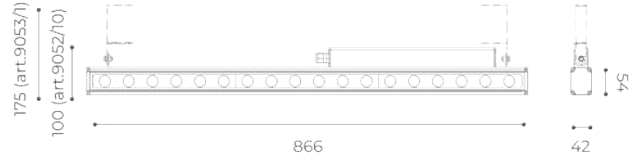

Available finishes:



Light Source power led
Power 220-240V
Dimmer upon request
CRI ≥80
IP Rating IP65
Electrical Class I
Application wall, floor, roof
Diffuser tempered extra-clear glass, silk-screened

Power 220-240V
 36,6Wled - 41,7We
Led Colour temp. 2700K/3000K



				lm	graphite	aluminium
2700K	220-240V	▲ 14°		3560	901731084	901731085
36,6Wled		▲ 28°		3700	901731094	901731095
41,7We		▲ 45°		3444	901731104	901731105
		● 52°x12°		3632	901731114	901731115

				lm	graphite	aluminium
3000K	220-240V	▲ 14°		3748	901711084	901711085
36,6Wled		▲ 28°		3894	901711094	901711095
41,7We		▲ 45°		3624	901711104	901711105
		● 52°x12°		3824	901711114	901711115

Lightsaber power led

L1146mm



Available finishes:



Light Source power led
Power 220-240V
Dimmer upon request
CRI ≥80
IP Rating IP65
Electrical Class I
Application wall, floor, roof
Diffuser tempered extra-clear glass, silk-screened

Power 220-240V
 49,1Wled - 53,3We
Led Colour temp. 2700K/3000K




			lm	graphite	aluminium
2700K	220-240V	▲ 14°	4748	901731124	901731125
49,1Wled		▲ 28°	4932	901731134	901731135
53,3We		▲ 45°	4592	901731144	901731145
		● 52°x12°	4843	901731154	901731155

			lm	graphite	aluminium
3000K	220-240V	▲ 14°	4998	901711124	901711125
49,1Wled		▲ 28°	5192	901711134	901711135
53,3We		▲ 45°	4832	901711144	901711145
		● 52°x12°	5098	901711154	901711155

Lightsaber mid power led

L306mm

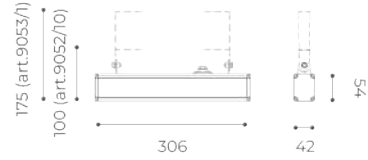

Available finishes:



Light Source mid power led
Power 24V - 220-240V
Dimmer not
CRI ≥80
IP Rating IP65
Electrical Class I, III
Application wall, floor, roof
Diffuser tempered extra-clear glass, silk-screened

Power 24V 8,2Wled
 220-240V 8,2Wled-10,8We
Led Colour temp. 2700K/3000K



				lm	graphite	aluminium
2700K 8,2Wled	24V III		44°	669	901732134	901732135
			80°	566	901732204	901732205
			31°x88°	554	901732014	901732015


				lm	graphite	aluminium
3000K 8,2Wled	24V III		44°	704	901712134	901712135
			80°	597	901712004	901712005
			31°x88°	583	901712014	901712015

				lm	graphite	aluminium
2700K 8,2Wled 10,8We	220-240V		44°	669	901731224	901731225
			80°	566	901731164	901731165
			31°x88°	554	901732024	901732025

				lm	graphite	aluminium
3000K 8,2Wled 10,8We	220-240V		44°	704	901711224	901711225
			80°	597	901711164	901711165
			31°x88°	583	901712024	901712025

Lightsaber mid power led

L584mm

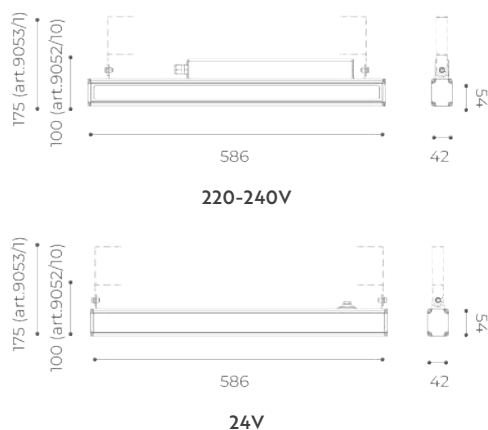

Available finishes:



Light Source mid power led
Power 24V - 220-240V
Dimmer upon request
CRI ≥80
IP Rating IP65
Electrical Class I, III
Application wall, floor, roof
Diffuser tempered extra-clear glass, silk-screened

Power 24V 16,2Wled
 220-240V 16,2Wled-17,6We
Led Colour temp. 2700K/3000K



				lm	graphite	aluminium
2700K 16,2Wled	24V III	▲ 44°	1338	901732144	901732145	
		▲ 80°	1133	901732034	901732035	
		● 31°x88°	1108	901732044	901732045	

				lm	graphite	aluminium
3000K 16,2Wled	24V III	▲ 44°	1409	901712144	901712145	
		▲ 80°	1193	901712034	901712035	
		● 31°x88°	1166	901712044	901712045	

				lm	graphite	aluminium
2700K 16,2Wled 17,6We	220-240V	▲ 44°	1338	901731234	901731235	
		▲ 80°	1133	901731174	901731175	
		● 31°x88°	1108	901732054	901732055	

				lm	graphite	aluminium
3000K 16,2Wled 17,6We	220-240V	▲ 44°	1409	901711234	901711235	
		▲ 80°	1193	901711174	901711175	
		● 31°x88°	1166	901712054	901712055	

Lightsaber mid power led

L866mm




220-240V



24V

Available finishes:



Light Source mid power led
Power 24V - 220-240V
Dimmer upon request
CRI ≥80
IP Rating IP65
Electrical Class I, III
Application wall, floor, roof
Diffuser tempered extra-clear glass, silk-screened

Power 24V 24Wled
 220-240V 24Wled-27,9We
Led Colour temp. 2700K/3000K



				lm	graphite	aluminium
2700K 24Wled	24V III		44°	2007	901732154	901732155
			80°	1698	901732064	901732065
			31°X88°	1662	901732074	901732075

				lm	graphite	aluminium
3000K 24Wled	24V III		44°	2112	901712154	901712155
			80°	1791	901712064	901712065
			31°X88°	1749	901712074	901712075

				lm	graphite	aluminium
2700K 24Wled 27,9We	220-240V		44°	2007	901731244	901731245
			80°	1698	901731184	901731185
			31°X88°	1662	901731194	901731195

				lm	graphite	aluminium
3000K 24Wled 27,9We	220-240V		44°	2112	901711244	901711245
			80°	1791	901711184	901711185
			31°X88°	1749	901711194	901711195

Lightsaber mid power led

L1146mm



LIGHTSABER MID POWER LED | diomede @2026

Available finishes:



Light Source mid power led
Power 24V - 220-240V
Dimmer upon request
CRI ≥80
IP Rating IP65
Electrical Class I, III
Application wall, floor, roof
Diffuser tempered extra-clear glass, silk-screened

Power 24V 30,7Wled
 220-240V 30,7Wled-35,2We
Led Colour temp. 2700K/3000K



		lm		graphite	aluminium
2700K 30,7Wled	24V III	▲ 44°	2676	901732164	901732165
		▲ 80°	2264	901732084	901732085
		● 31°X88°	2216	901732094	901732095


		lm		graphite	aluminium
3000K 30,7Wled	24V III	▲ 44°	2816	901712164	901712165
		▲ 80°	2388	901712084	901712085
		● 31°X88°	2332	901712094	901712095

		lm		graphite	aluminium
2700K 30,7Wled 35,2We	220-240V	▲ 44°	2676	901731254	901731255
		▲ 80°	2264	901731204	901731205
		● 31°X88°	2216	901731214	901731215

		lm		graphite	aluminium
3000K 30,7Wled 35,2We	220-240V	▲ 44°	2816	901711254	901711255
		▲ 80°	2388	901711204	901711205
		● 31°X88°	2332	901711214	901711215




ACCESSORIES




Brackets kit l 100mm
colour **Aluminium**

code **9050**




Inground installation spike
25x230x247mm
For 300mm model only
colour **Graphite**

code **90614**




Brackets kit l 100mm
colour **Graphite**

code **9052**




Inground installation spike
25x230x247mm
For 300mm model only
colour **Aluminium**

code **90615**




Brackets kit l 175mm
colour **Aluminium**

code **9051**




Power supply 24V DC 70W IP67
267x79x52mm

code **9049**



Brackets kit l 175mm
colour **Graphite**

code **9053**




Power supply 24V DC 150W IP67
267x79x52mm

code **9057**




Multiple connection kit
23x56x175mm

code **9055**



SPD CL.1 12KV 320V UC max
40x57x20mm

code **9058**



Single connection kit
Ø23x117mm

code **9054**

ACCESSORIES:

code **9050 / 9052 / 9051 / 9053 / 9054 / 9055 / 9058 / 90614 / 90615 / 9049 / 9057**



Miron

HUMAN TECHNIQUE, CARESS OF LIGHT

Miron is a family of compact projectors in two sizes, suitable for surface or pole mounting.

Made of die-cast aluminium and finished with a cathoresis treatment and a layer of polyester powder paint resistant to outdoor environments, it comes with an integrated power supply.

Various optics available and silicone tempered glass to guarantee IP sealing. Equipped with Power LEDs in 2700K and 3000K colours, it is adjustable on the horizontal axis so that the light beam can be directed.

The base is painted like the body and acts as a compartment for the connector, concealing the fixing bracket.

Miron è una famiglia di proiettori compatti e realizzati in due dimensioni, adatta per l'installazione su superfici o su palo.



In alluminio pressofuso e finito con trattamento di cataforesi e strato di vernice di polvere di poliestere resistente agli ambienti esterni, è fornito con alimentatore integrato.


Diverse ottiche disponibili e vetro serigrafato e temprato siliconato per garantirne la tenuta IP. Equipaggiato da Power Led in colore 2700K e 3000K, è orientabile sull'asse orizzontale così da poter direzionare il fascio luminoso.

La base è verniciata come il corpo e funge da vano per il connettore, nascondendo la staffa di fissaggio.






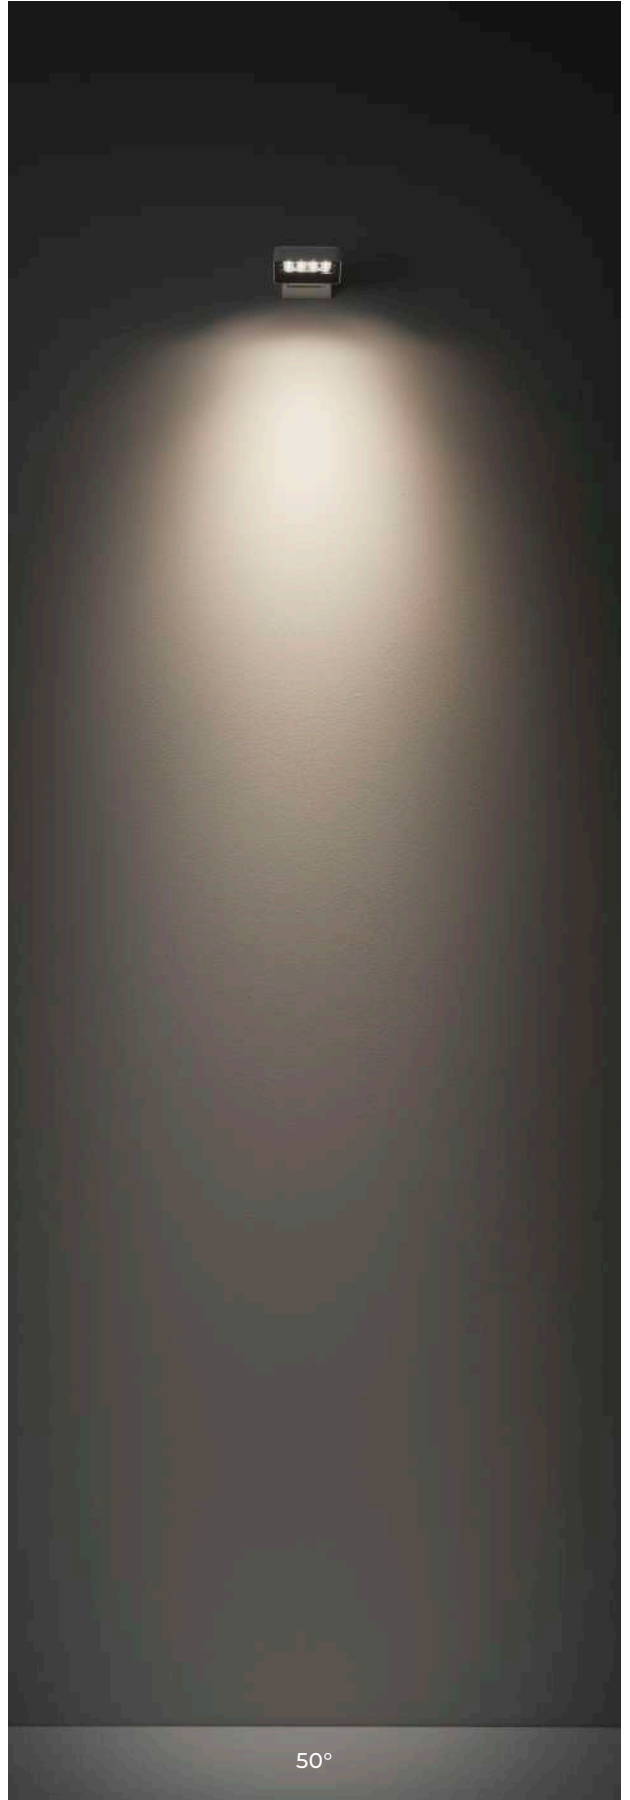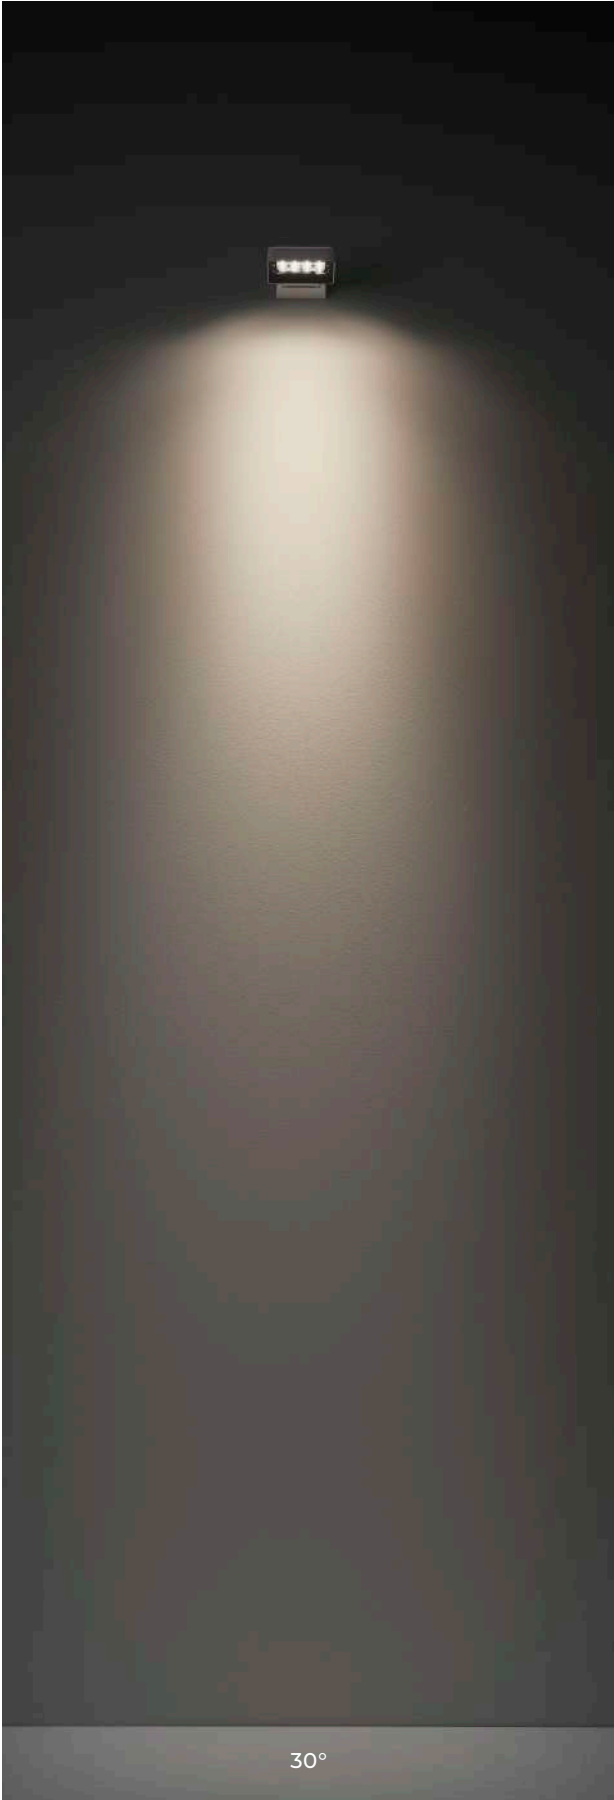


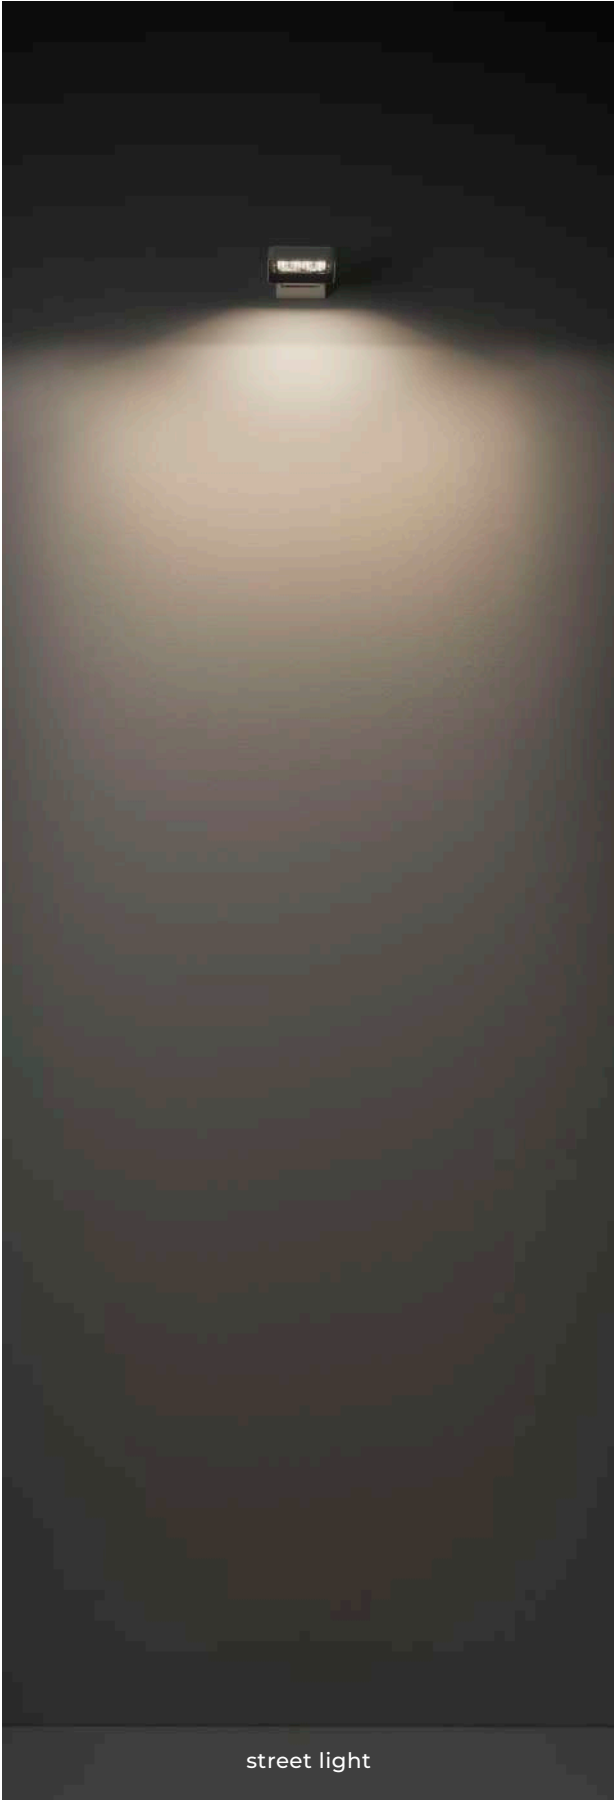

street light

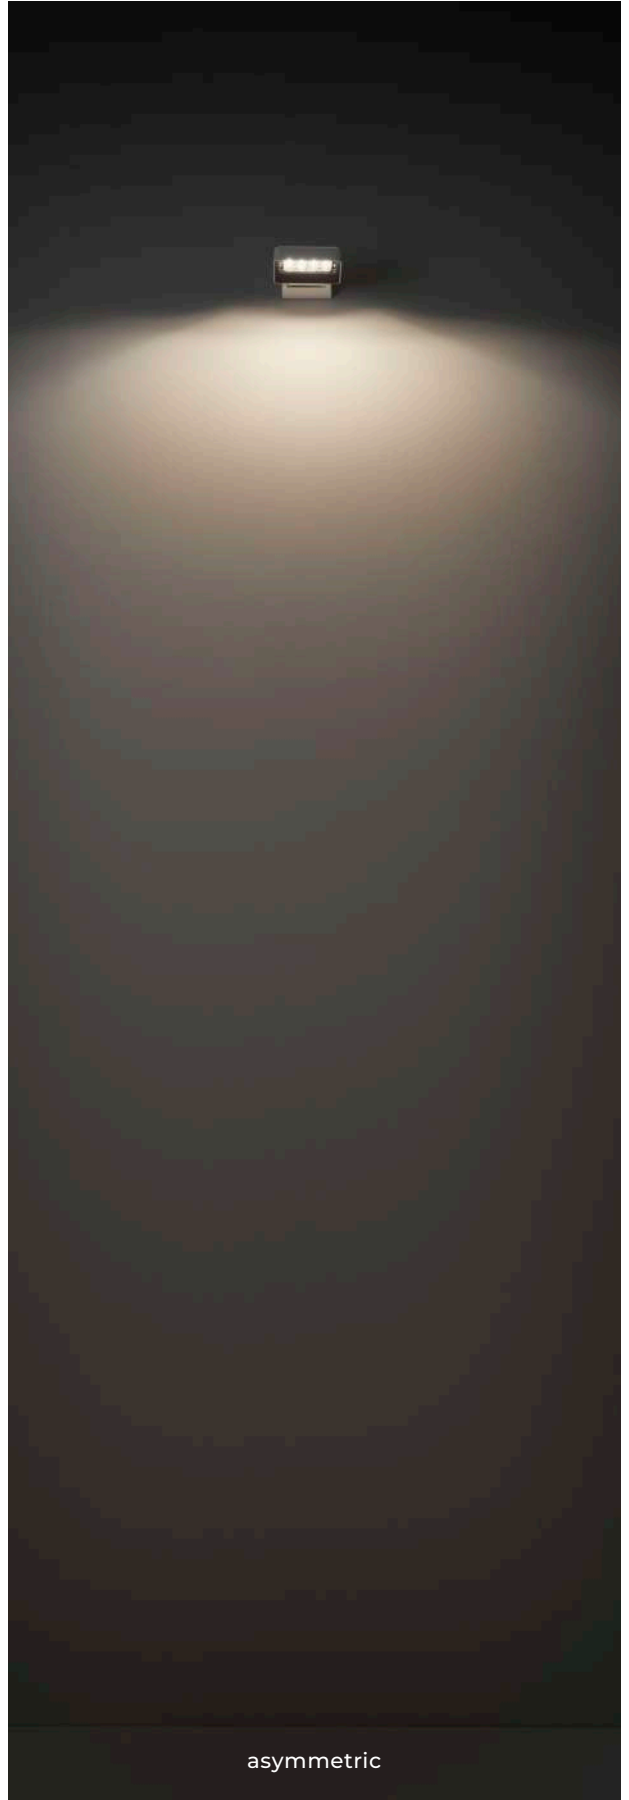


asymmetric

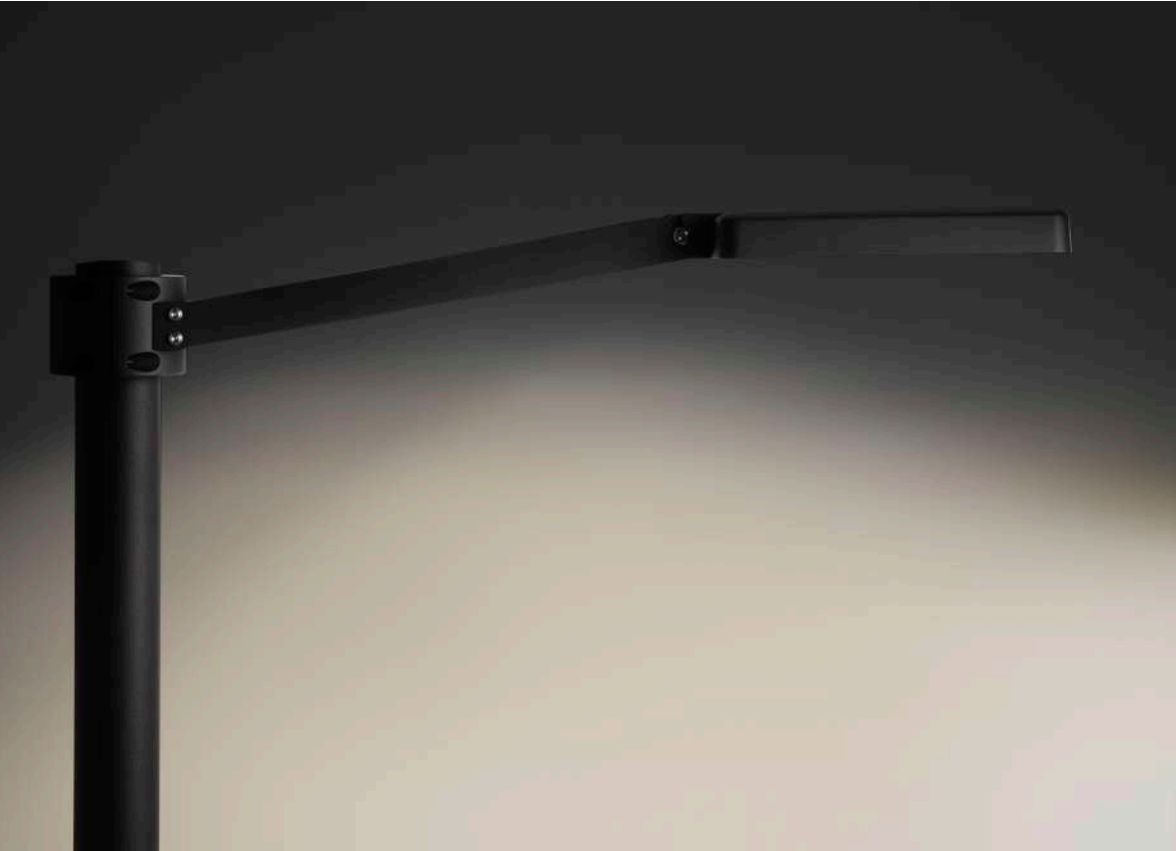



Miron 16



Available finishes:




Light Source	power led	Power	220-240V 16,8Wled 18,6We
Supply	220-240V	Led Colour temp.	2700K/3000K
Dimmer	upon request		
CRI	≥80		
IP rating	IP65		
Electrical Class	I		
Application	floor, wall, pole, ceiling		
Diffuser	transparent screen-printed tempered glass		



			lm	white	sand	graphite	aluminium	corten
2700K 16,8Wled 18,6We	220-240V	30°	2105	900531002	900531003	900531004	900531005	900531008
		50°	2137	900531012	900531013	900531014	900531015	900531018
		Street	1580	900531032	900531033	900531034	900531035	900531038
		Asymmetric	1925	900531022	900531023	900531024	900531025	900531028
			lm	white	sand	graphite	aluminium	corten
3000K 16,8Wled 18,6We	220-240V	30°	2216	900511002	900511003	900511004	900511005	900511008
		50°	2249	900511012	900511013	900511014	900511015	900511018
		Street	1663	900511032	900511033	900511034	900511035	900511038
		Asymmetric	2026	900511022	900511023	900511024	900511025	900511028

Miron 24



Available finishes:

- white
- sand
- graphite
- aluminium
- corten
- olive green **on request*

Light Source power led
Supply 220-240V
Dimmer upon request
CRI ≥80
IP rating IP65
Electrical Class I
Application floor, wall, pole, ceiling
Diffuser transparent screen-printed tempered glass

Power 36Wled 40,2We
Led Colour temp. 2700K/3000K




			lm	white	sand	graphite	aluminium	corten
2700K	220-240V	30°	4499	900531052	900531053	900531054	900531055	900531058
36Wled		50°	4565	900531062	900531063	900531064	900531065	900531068
40,2We		Street	3375	900531082	900531083	900531084	900531085	900531088
		Asymmetric	4113	900531072	900531073	900531074	900531075	900531078

			lm	white	sand	graphite	aluminium	corten
3000K	220-240V	30°	4736	900511052	900511053	900511054	900511055	900511058
36Wled		50°	4805	900511062	900511063	900511064	900511065	900511068
40,2We		Street	3553	900511082	900511083	900511084	900511085	900511088
		Asymmetric	4330	900511072	900511073	900511074	900511075	900511078




ACCESSORIES




Braket $\varnothing 76$ l 150mm
colour **Graphite**

code **90214**




Braket $\varnothing 76$ l 400mm colour
Aluminium

code **90225**




Braket $\varnothing 76$ l 150mm
colour **Aluminium**

code **90215**




Braket $\varnothing 76$ l 400mm colour
Graphite

code **90224**




Double Braket $\varnothing 76$ l 150mm
colour **Graphite**

code **90234**




Double Braket $\varnothing 76$ l 400mm
colour **Graphite**

code **90244**




Double Braket $\varnothing 76$ l 150mm
colour **Aluminium**

code **90235**



Double Braket $\varnothing 76$ l 400mm
colour **Aluminium**

code **90245**



Pole connector $\varnothing 60$
colour **Aluminium**


code **90255**

ACCESSORIES:

code **90214 / 90215 / 90234 / 90235 / 90224 / 90225 / 90244 / 90245 / 90255**



ACCESSORIES

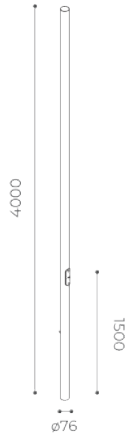

Ø76mm
h4000mm
colour **White**
code **90622**



















































































Ø76mm
h4000mm
colour **Sand**
code **90623**

Ø76mm
h4000mm
colour **Graphite**
code **90624**

ACCESSORIES:

code **90622 / 90623 / 90624**

LEGEND

 24 V	 angle beam: 30°	 street beam	 degree of protection IP 20
 220-240V	 angle beam: 31°x88°	 suspension installation	 degree of protection IP 40
 battery	 angle beam: 32°	 bollard installation	 degree of protection IP 54
 complies with CE directives	 angle beam: 36°	 pole installation	 degree of protection IP 65
 class I	 angle beam: 44°	 head pole	 degree of protection IP 66
 class II	 angle beam: 45°	 wall installation	 degree of protection IP 67
 class III	 angle beam: 50°	 ceiling installation	 degree of protection IP 68
 dimmer 1_10V	 angle beam: 52°	 ground installation	 led cob
 dimmer dali	 angle beam: 52°x12°	 recessed ceiling installation downlight	 led midpower
 dimmer on request	 angle beam: 56°	 recessed ground installation	 led power
 dimmer: phase cut	 angle beam: 60°	 wall recessed installation	 bulb E27
 dimmer PWM	 angle beam: 65°	 IK 01	 bulb G9
 dimmer touch	 angle beam: 80°	 IK 02	 bulb GU10
 angle beam: 10°	 angle beam: 120°	 IK 03	 equipped with cable of the specified length - 0,2m
 angle beam: 14°	 angle beam: 130°	 IK 04	 equipped with cable of the specified length - 1m
 angle beam: 15°	 angle beam: 150°	 IK 05	 equipped with cable of the specified length - 5m
 angle beam: 18°	 angle beam: 180°	 IK 06	 rotation
 angle beam: 19°	 angle beam: 360°	 IK 07	 rotation 90-20°
 angle beam: 26°	 asymmetrical beam	 IK 08	 rotation 360° horizontal
 angle beam: 28°	 diffused beam	 IK 09	 360° vertical rotation
Wled nominal consumption			 rotation Bella
We total electricity consumption			 walkover

ACCESSORIES

9000	box for installation ZERO D.110	9084	Beam Spreader Snap 36° - Lente 36°
9001	box for installation ZERO D.45	9085	Beam Spreader Snap 60° - Lente 60°
9002	box for installation ZERO D.65	9086	Linear Snap 10°x60°
9003	box for installation ZERO D.85	9087	Flat Top Snap 25°x25°
9004	2 way 3 polese terminal block IP68 2	9088	Louver Snap cutoff angle 40° - Honeycomb
9005	3-4 way 4 polese terminal block IP68 2	9089	recessed box for ITACA
9006	power supply 16W 110-240V IP20	9090	Honeycomb DOTLIGHT 50
9007	power supply 20W 220-240V IP20	9091	Honeycomb DOTLIGHT 70
9008	power supply 50W 220-240V IP20	9092	Honeycomb DOTLIGHT 110
9009	anchor bolts Matita	9093	anchor bolts
9018	recesed box ModuloA SQ	90117	tube frame DX38 BK
9019	recesed box ModuloA RC	90127	eyelid frame DX38 BK
9036	2-3 way 3 poles terminal block	90157	tube frame DX54 BK
9037	power supply 8W 220-240V IP54	90167	eyelid frame DX54 BK
9038	gold shield ModuloA SQ	90214	bracket L.150MM D.76MM GR
9039	gold shield ModuloA RC	90215	bracket L.150MM D.76MM AL
9041	anchor bolts Matita Square	90224	bracket L.400MM D.76MM GR
9042	anchor bolts Metoo/Zeus	90225	bracket L.400MM D.76MM AL
9044	shield 180° Matita/Sofia	90234	double bracket L.150MM D.76MM GR
9049	power supply 70W IP67	90235	double bracket L.150MM D.76MM AL
9050	brackets kit L. 100 AL	90244	double bracket L.400MM D.76MM GR
9051	brackets kit L. 175 AL	90245	double bracket L.400MM D.76MM AL
9052	brackets kit L. 100 GR	90255	pole adapter for pole d.60
9053	brackets kit L. 175 GR	90614	bracket + spike Lightsaber L300 GR
9054	single connector kit IP68 Lightsaber	90615	bracket + spike Lightsaber L300 AL
9055	multiple connector kit IP68 Lightsaber	90622	pole D.76 4000MM WH
9057	power supply 24V DC 150W IP65	90623	pole D.76 4000MM SB
9058	surge protector SPD CL.I 230V	90624	pole D.76 4000MM GR
9059	power supply 16W IP65	90672	pole D.60 1200MM WH
9062	anchor bolts Muse/Gler sun	90673	pole D.60 1200MM SB
9070	battery for Bella	90674	pole D.60 1200MM GR
9073	recessed box Tasca	90682	pole D.60 1600MM WH
9074	gold shield Tasca	90683	pole D.60 1600MM SB
9075	aluminu shield Tasca	90684	pole D.60 1600MM GR
9076	cover BK Lila	90692	pole D.60 2600MM WH
9078	concrete box for installation for Talon Recessed	90693	pole D.60 2600MM SB
9079	concrete box for installation for Divar Recessed	90694	pole D.60 2600MM GR
9080	IP68 connection box gel	90702	pole D.60 2500MM with base WH
9081	2 poles cable L5000MM incl.female connector	90703	pole D.60 2500MM with base SB
9082	2 poles cable L10000MM incl.female connector	90704	pole D.60 2500MM with base GR

Diomede srl

Via Meucci, 5 - Ornago | 20876 MB Italy
+ 39 039 2296724 | info@diomedelight.com

diomedelight.com

Credits

Graphic Project: ILARIA MARTIN

Render: VALERIO GESSATE

Photos: ALBERTO STRADA | ALBERTO FAVARA | SARAH ELISE
SARTORE | FABIO OGGERO

Assistance: DIOMEDE LIGHT TEAM

Artistic Featuring: ABAMULU VIGANÒ

@2026 The company is not responsible for any printing errors, incorrect dimensions, descriptions or technical data; and reserves the right to modify all the products described herein at any time and without notice. Any reproduction, even partial, is prohibited, unless authorized.



diomede

LET THERE BE LIGHT

diomedelight.com